
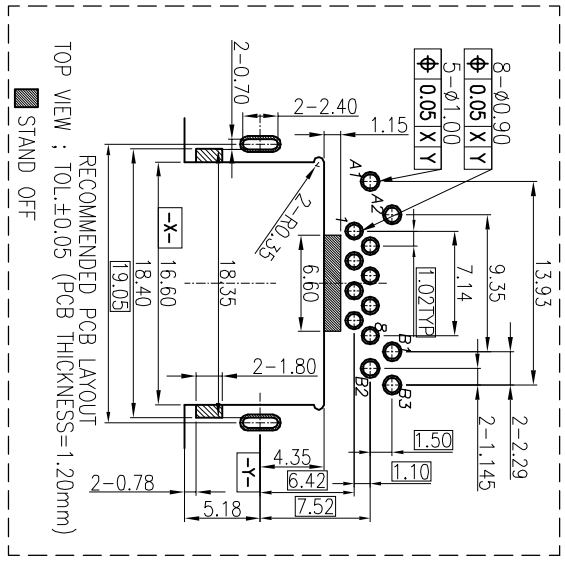


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO. T160614-2A		Allen	2016.11.02
B	ECR NO. S161125-C		Allen	2016.11.15

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:**
 - CURRENT RATING: 1.5A MAX.
 - VOLTAGE RATING: 150V MAX.
 - CONTACT RESISTANCE: 50mΩ MAX.(INITIAL), 100mΩ MAX.(AFTER LIFE TEST).
 - INSULATION RESISTANCE: 100MΩ MIN.
- MECHANICAL CHARACTERISTICS:**
 - DURABILITY: 5000 CYCLES.
 - INSERTION FORCE: 2.25kg MAX. WITH LATCH DEPRESSED.
 - WITHDRAWAL FORCE: 4.5kg MAX. WITH LATCH DEPRESSED.
 - OPERATING TEMPERATURE: -30°C ~ +70°C.
- MARKING: MARK "S" INSIDE OF THE CONNECTOR.
- PACKAGING: TAPE & REEL.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION
- HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON THE PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PRINTED DATE CODE "YY MM DD" ON TOP OF THE CONNECTOR.
- BLACK IN(SOLDER TIME LIMIT:3 MONTHS AFTER ETD)

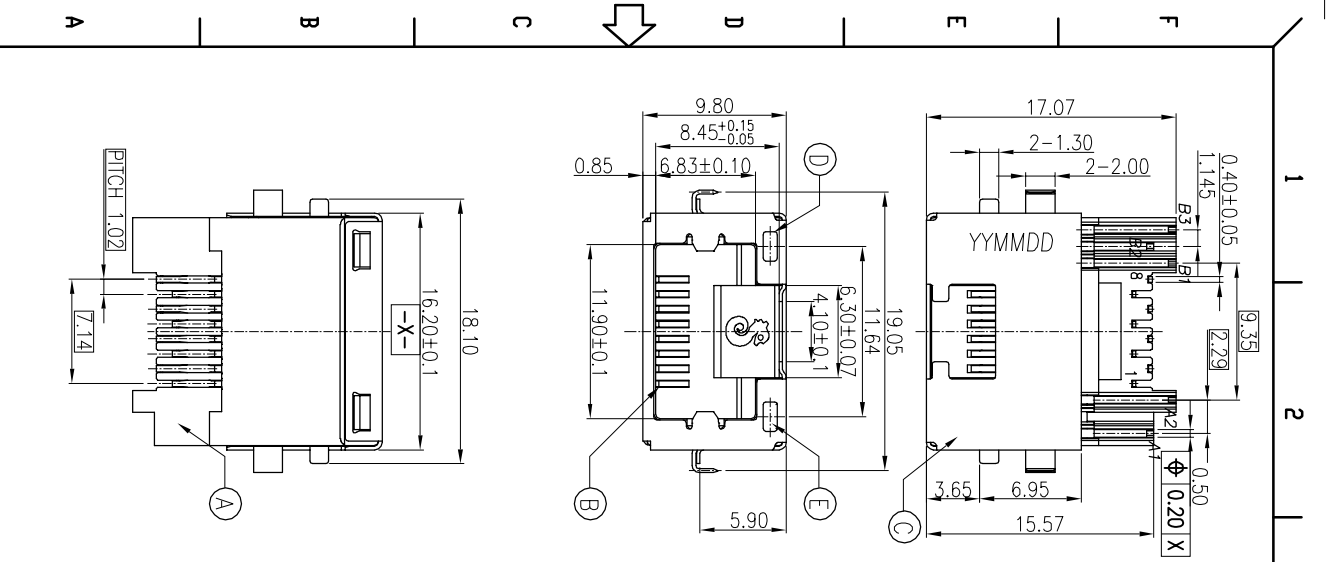

NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	LED	1	YELLOW	Matte Sn 80u"
D	LED	1	YELLOW	Matte Sn 80u"
C	SHELL	1	STAINLESS STEEL T:0.25mm	80u" Min. BLACK IN PLATING ON ALL
B	8PBC CONTACT	8	PHOSPHOR BRONZE T:0.25mm	Au:1u" PLATING ON CONTACT AREA Matte Sn 120u" ON SOLDER TAIL; ALL OVER IN 50u" MIN.
A	BODY	1	PA101 No recycled material	UL 94V-0 & BLACK

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
XX : ±0.3	XX : ±1°
XXX : ±0.2	

TITLE	PART NO.	UNIT	REV.
RJ45 JACK	2RJ3084-138211F	mm	1
DWN	ALLEN	SCALE 4:1	
CHKD	JAMES	SHEET: 1 / 1	
APVD	BOYE	SIZE: A3	

Singatron Enterprise Co., Ltd.
信晋企业股份有限公司

CUSTOMER COPY