


REV:	EGN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: S130318-4A	YUREN	20130423



SPECIFICATIONS:

(1) ELECTRICAL:





- 1. VOLTAGE RATING : 125 VAC.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC 60HZ, 1MIN.
- 6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.

(2) MECHANICAL:

- 1. DURABILITY: 750 CYCLES MIN.
 - 2. INSERTION FORCE: 22.24N MAX. WITH LATCH DEPRESSED.
 - 3. WITHDRAWAL FORCE: 44.48N MAX. WITH LATCH DEPRESSED.
 - 6. PCB RETENTION PRE-SOLDER: 1 LB MIN.
 - 7. PCB RETENTION POST-SOLDER: 10 LBS MIN.
- (3) ENVIRONMENTAL:
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: : -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING.

- (4) OTHER GENERAL SPEC. TO REFER "2RJ3Y01-118211H SPEC."
- (5) TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPECIFICATION
- (6) GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
- (7) MEET WAVE SOLDERING LEAD-FREE PROCESS ONLY,
NOT ALLOWABLE FOR REFLOWS PROCESS.
- (8) 僅限適用於總產品, 不適用 NB

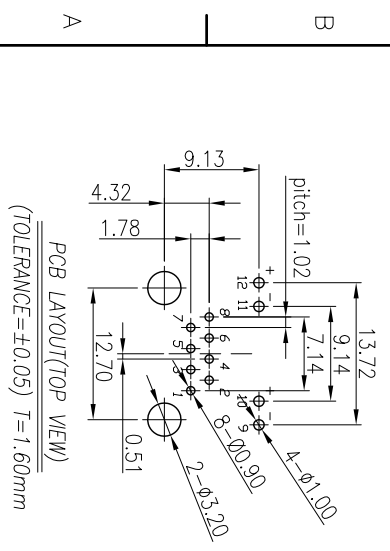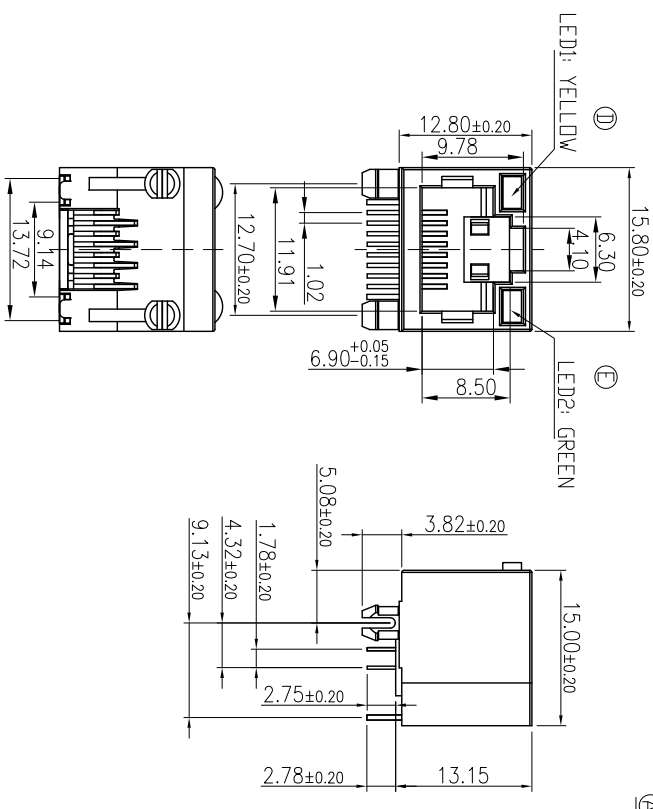

E	LED (GREEN)	1	Size: 7x3.05x1.85, P=2.54mm	GREEN T=0.5MM Sn120u" MIN.
D	LED (YELLOW)	1	Size: 7x3.05x1.85, P=2.54mm	YELLOW T=0.5MM Sn120u" MIN.
C	TERMINAL	1	C5210-EH T=0.3mm	Gold 30" On Contact Bright Sn 40u" On Solder Tail; All over Ni 30u" Plated
B	COVER	1	HIGH TEMP., UL94V-0	BLACK
A	HOUSING	1	PA6T/66+30%GF (FR52630LY)	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信晉企業股份有限公司				
DECIMALS:		ANGLES:	TITLE	
X : ±0.5	X : ±2°		1X1 RJ45 LED JACK	
X.X : ±0.3	X.X : ±1°		DWG YUREN PART NO. 2RJ3Y01-118211H	
X.XX : ±0.2			CHKD QUAN SCALE: 2:1	UNIT: mm
			APVD QUAN SIZE: A3	SHEET: 1 OF 1 REV: A
CUSTOMER COPY				