


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: A190117-5A	JTT	2019.12.02

- NOTES:
- TEST CONDITIONS:
 2-1. CONDUCTANCE RESISTANCE 20m Ohm Max.
 2-2. HI-POT TEST 500VAC,0.5mA(1SEC)
 2-3. INSULATION RESISTANCE: 100M Ohm Min. BY 500 VDC
 - SPECIFICATIONS:SEE "BA SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

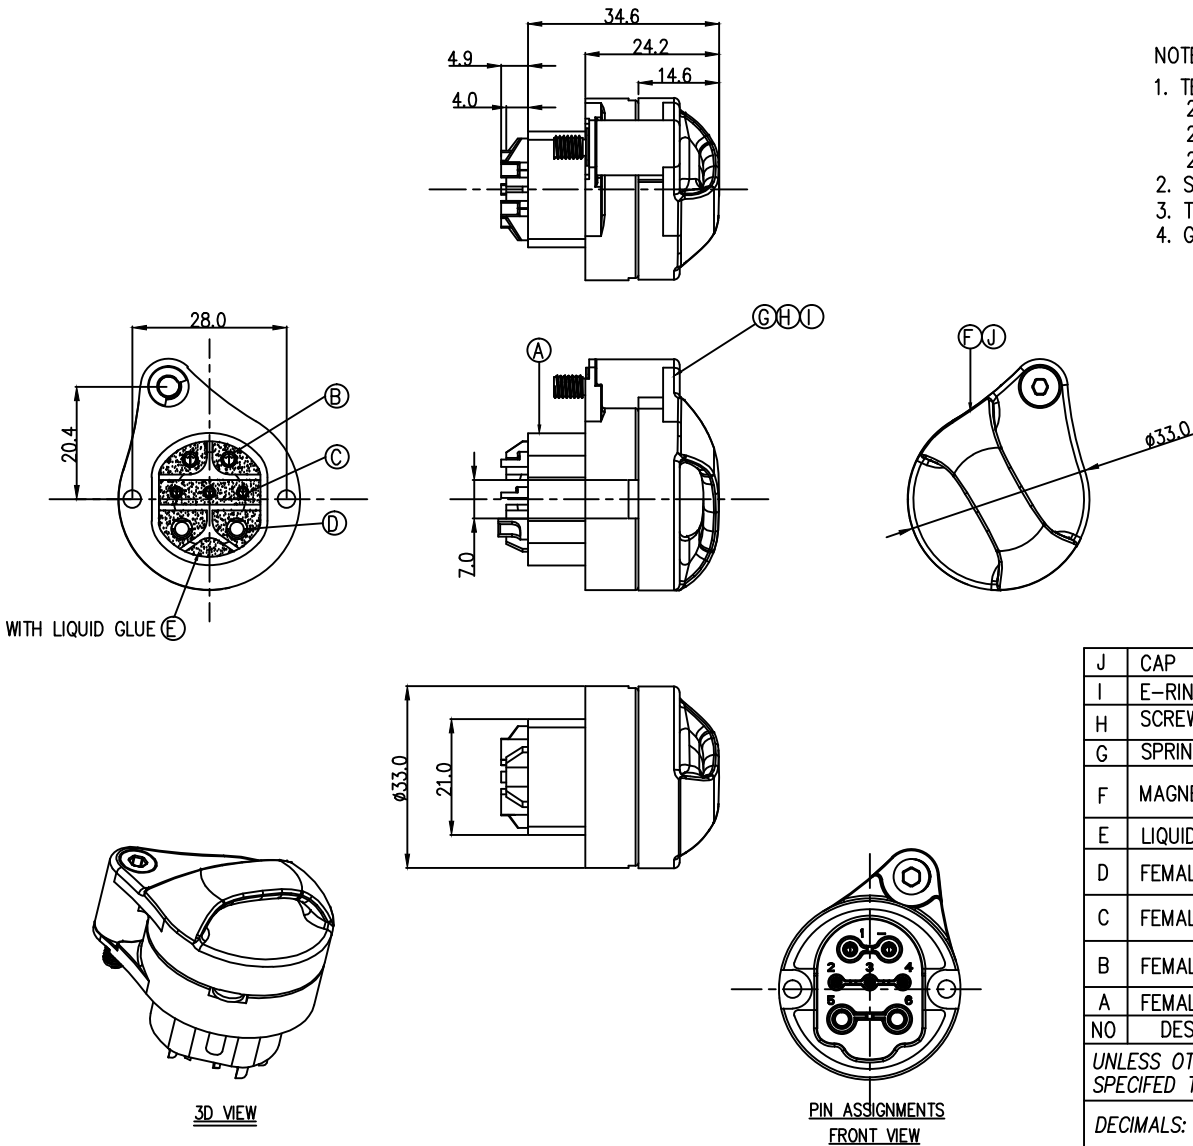

J	CAP	1	PLASTIC	BLACK
I	E-RING	1	SUS	N/A
H	SCREW	1	SUS	BLACK
G	SPRING	1	SUS	N/A
F	MAGNET	2	Nd-Fe-B	Cu 80u" Min. OVER NICKEL PLATING
E	LIQUID GLUE	1	N/A	BLACK
D	FEMALE PIN	2	BRASS	Gold flash PLATING OVER NICKEL PLATING
C	FEMALE PIN	3	BRASS	Gold flash PLATING OVER NICKEL PLATING
B	FEMALE PIN	2	BRASS	Gold flash PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	BATTERY CONNECTOR FEMALE CONN. (2+3+2)PIN(10A+5A+20A)	
X :±0.5	X :±2°	DWN	JTT	PART NO.2BA3014-V07N01H
X.X :±0.3	X.X :±1°	CHKD	Cerry	SCALE 2:1 UNIT: mm
X.XX :±0.2		APVD	William	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				