

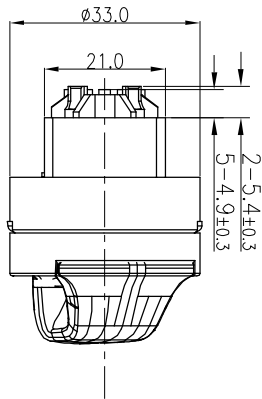



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A200707-2A	JY	2021.12.18
B	ECN NO.:S202302-C11	Jun	2023.02.13

NOTES:

- TEST CONDITIONS:
 - CONDUCTANCE RESISTANCE 20m 0hm Max.
 - HI-POT TEST 500VAC,0.5mA(1SEC)
 - INSULATION RESISTANCE: 100M 0hm Min, BY 500 VDC
- SPECIFICATIONS:SEE "BA SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- CAP RETENTION FORCE: 7.2kgf, 5s

BA Series

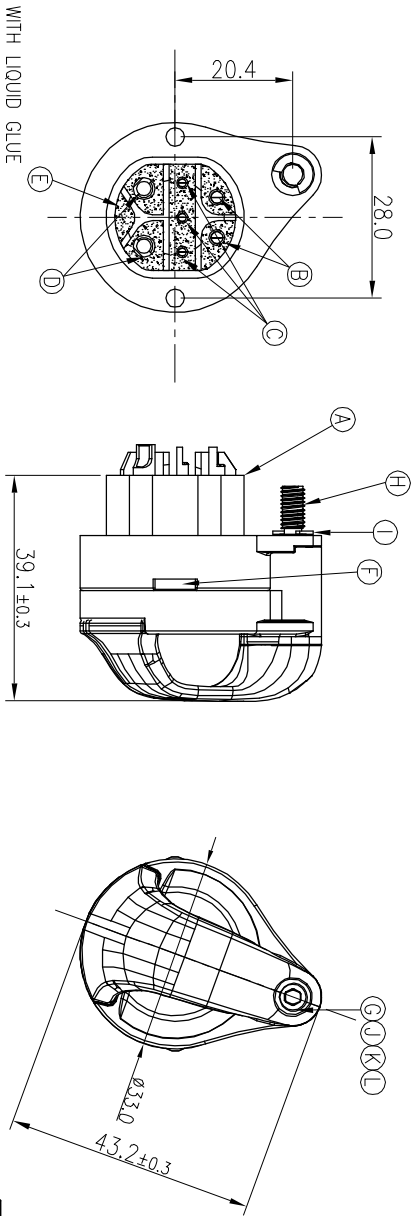

L	GLUE	1	N/A	TRANSPARENT
K	CAP 把手	1	铝合金	喷砂锡极黑
J	CAP	1	PLASTIC	BLACK
I	E-RING	1	SUS	N/A
H	SCREW	2	SUS	BLACK
G	SPRING	1	SUS	N/A
F	MAGNET	2	Nd-Fe-B	Cu 底 80u" Min, OVER NICKEL PLATING
E	LIQUID GLUE	1	N/A	BLACK
D	FEMALE PIN	2	BRASS	Gold flash PLATING OVER NICKEL PLATING
C	FEMALE PIN	3	BRASS	Gold flash PLATING OVER NICKEL PLATING
B	FEMALE PIN	2	BRASS	Gold flash PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Suzhou Singatron Auto Electronics CO.,LTD. 苏州信昌汽车电子有限公司				
TITLE BATTERY CONNECTOR FEMALE CONN. (2+3+2)Pm(10A+5A+20A)				
DECIMALS:	ANGLES:	DWN	Jun	PART NO.:2BA3014-V07N03H
X :±0.5	X :±2°	CHKD	JF	SCALE 2:1 UNIT: mm
X.X :±0.3	X.X :±1°	APVD	Steve	SIZE: A3 SHEET:1 OF 1 REV: B
X.XX :±0.2		CUSTOMER COPY		