


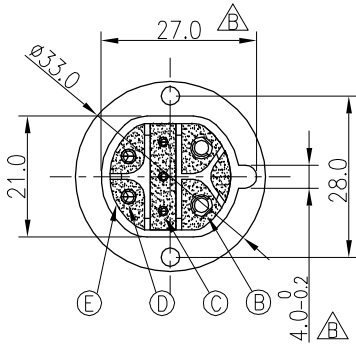
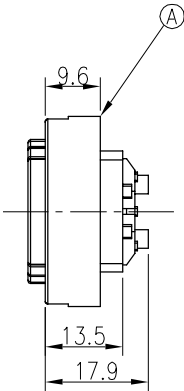


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A211123-1A	Jun	2022.06.06
B	ECN NO.:S202207-C06	Jun	2022.10.19

NOTES:

1. TEST CONDITIONS:
2-1. CONDUCTANCE RESISTANCE 20m Ohm Max.
2-2. HI-POT TEST 500VAC,0.5mA(1SEC)
2-3. INSULATION RESISTANCE: 100M Ohm Min. BY 500 VDC
2. SPECIFICATIONS:SEE "BA SERIES SPECIFICATIONS".
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **Q.P. PASS**



3D VIEW

E	LIQUID GLUE	1	N/A	BLACK
D	FEMALE PIN	2	BRASS	Gold Flash PLATING OVER NICKEL PLATING
C	FEMALE PIN	3	BRASS	Gold Flash PLATING OVER NICKEL PLATING
B	FEMALE PIN	2	BRASS	Gold Flash PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司	
DECIMALS:		ANGLES:	TITLE	BATTERY CONNECTOR FEMALE CONN. (2+3+2)PIN(10A+5A+20A)
X	:±0.5	X	:±2°	DWN JUN PART NO.2BA3014-V07N04H
X.X	:±0.3	X.X	:±1°	CHKD JF SCALE 2:1 UNIT: mm
X.XX	:±0.2			APVD STEVE SIZE: A3 SHEET:1 OF 1 REV:B
CUSTOMER COPY				