






REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A190117-6A	JTT	2019.07.29

NOTES:


- TEST CONDITIONS:
2-1. CONDUCTANCE RESISTANCE 20m Ohm Max.
2-2. HI-POT TEST 500VAC,0.5mA(1SEC)
2-3. INSULATION RESISTANCE: 100M Ohm Min. BY 500 VDC
- SPECIFICATIONS:SEE "BA SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS




3D VIEW

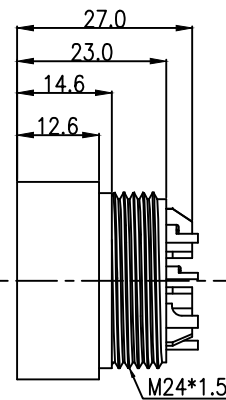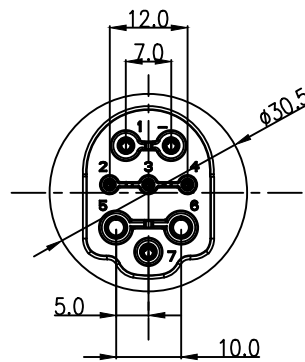

WITH LIQUID GLUE



PIN ASSIGNMENTS
FRONT VIEW



E	LIQUID GLUE	1	N/A	BLACK
D	FEMALE PIN	2	BRASS	Gold flash PLATING OVER NICKEL PLATING
C	FEMALE PIN	3	BRASS	Gold flash PLATING OVER NICKEL PLATING
B	FEMALE PIN	3	BRASS	Gold flash PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS: ANGLES:			TITLE BATTERY CONNECTOR FEMALE CONN. (3+3+2)PIN(10A+5A+20A)	
X	:±0.5	X	:±2°	DWN JTT PART NO.2BA3014-V08N01H
X.X	:±0.3	X.X	:±1°	CHKD Cerry SCALE 2:1 UNIT: mm
X.XX	:±0.2			APVD William SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				