
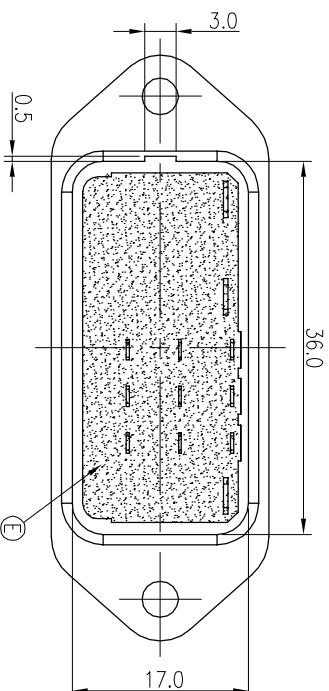


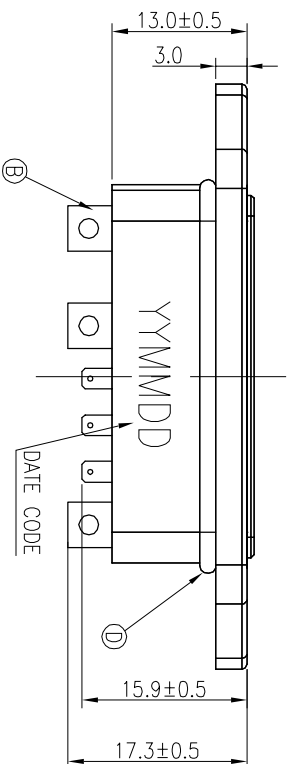


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T201124-2A		MF	2023.03.01

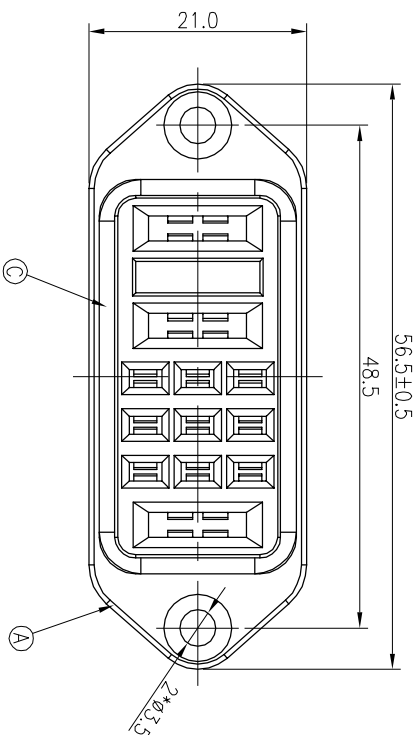

NOTES:

1. WATERPROOF DEGREE OF PROTECTION: IPX7
2. CURRENT RATING: POWER TERMINAL: 20A
SIGNAL TERMINAL: 2A
3. OPERATING TEMPERATURE: -40℃~85℃
4. CONTACT RESISTANCE: POWER TERMINAL≤5mΩ
SIGNAL TERMINAL≤30mΩ
5. INSERTION FORCE: 0.5~6kgf
EXTRACTION FORCE:: 0.5~6kgf
6. SALT: 72Hr
7. CYCLE LIFE: 3,000
8. CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
9. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
10. LASE DATE CODE "YYMMDD" ON TOP OF OVER MOLD

DATE CODE: YYMMDD



E	GLUE	2	N/A	BLACK
D	0-RING2	1	SILICONE	BLACK
C	0-RING1	1	SILICONE	BLACK
B	FEMALE PIN	9	PHOSPHOR BRONZE	100 μ in Min. Solderable Nickel plating Ni10
A	BODY	1	PA66+GF	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE FEMALE CONN. FEMALE (3+9)PIN				
DWN	MF	PART NO.:2BA3020-W12R00H		
CHKD	JF	SCALE 2:1	UNIT: mm	
APVD	STEVE	SIZE: A3	SHEET:1 OF 1	REV: A

CUSTOMER COPY