
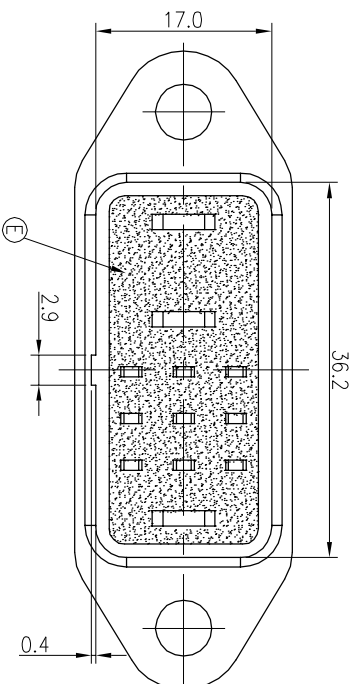

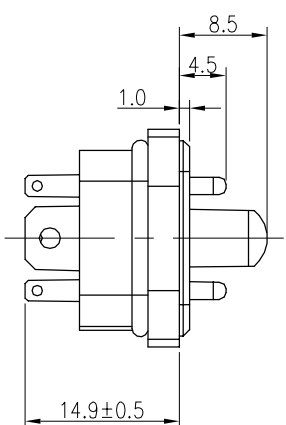
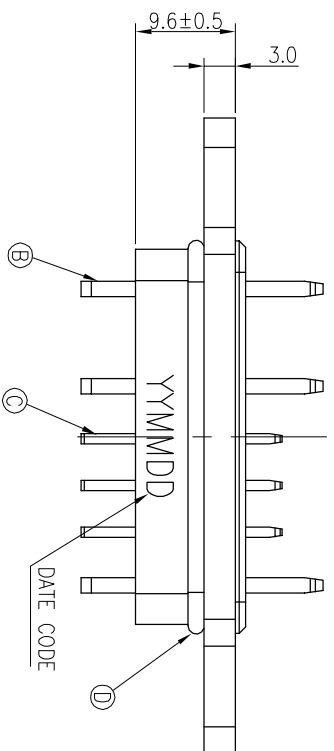



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	T201124-2B	MF	2023.03.02

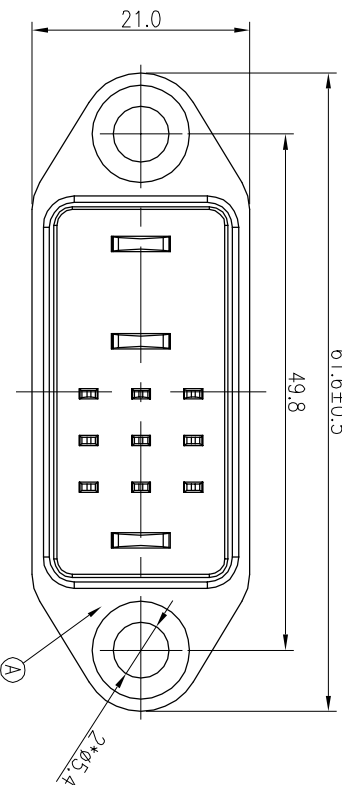

NOTES:

1. WATERPROOF DEGREE OF PROTECTION: IPX7
2. CURRENT RATING: POWER TERMINAL: 20A
SIGNAL TERMINAL: 2A
3. OPERATING TEMPERATURE: -40°C~85°C
4. CONTACT RESISTANCE: POWER TERMINAL≤5mΩ
SIGNAL TERMINAL≤30mΩ
5. SALT: 72Hr
6. CYCLE LIFE: 3,000
7. CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR, PASS**
9. LASE DATE CODE "YYMMDD" ON TOP OF CONNECTOR

DATE CODE: YYMMDD



E	LIQUID GLUE	1	EPOXY RESIN	BLACK
D	O-RING	1	SILICONE	BLACK
C	SIGNAL TERMINAL	9	BRASS	100μin Min. Solderable
B	POWER TERMINAL	3		Nickel plating
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE MALE CONN. MALE (3+9)PIN				
DWN	MF	PART NO.2BA3021-W12R00H		
CHKD	JF	SCALE 2:1	UNIT: mm	
APVD	STEVE	SIZE: A3	SHEET:1 OF 1	REV: A

CUSTOMER COPY