


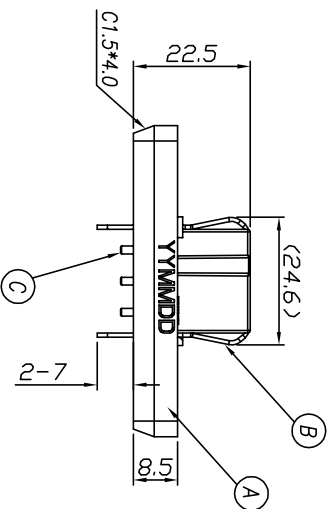
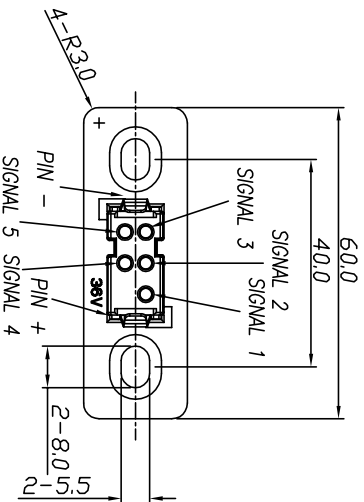


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:JT51223-5A	Yang	2016.11.02



SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 55V DC 30A
 - 1-2. CONTACT RESISTANCE: 5.0mΩ MAX.(PIN+/PIN- INITIAL PRE PIN)
 - 1-3. CONTACT RESISTANCE: 10mΩ MAX.(SIGNAL PIN INITIAL PRE PIN)
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 3.0 ± 2KGF (INITIAL)
 - 2-2. WITHDRAWAL FORCE :3.0 ± 2KGF (INITIAL)
- LIFE TEST: 1,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2BA3029".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Q.P. PASS



With Liquid Glue

C	SIGNAL	5	BRASS	SILVER PLATING
B	SPRING	2	COPPER ALLOY	GOLD FLASH
A	HOUSING	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE BATTERY CONNECTOR				
DMN	Yang	PART NO.	2BA3029-W07R02P	
CHKD	Harlen	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: A

CUSTOMER COPY