


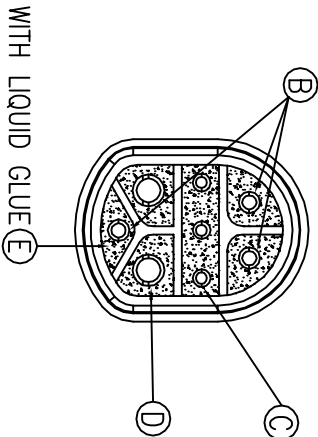
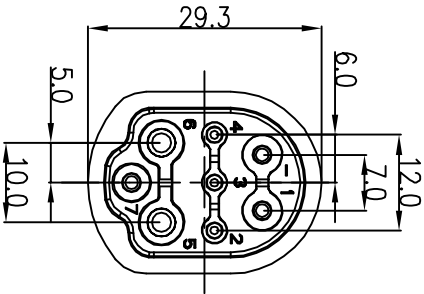
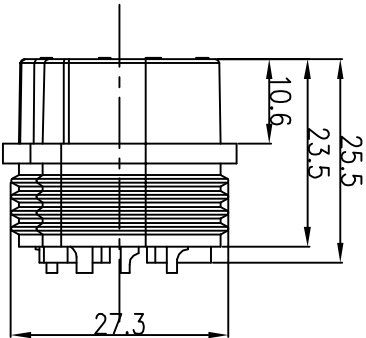


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A190117-6B	JIT		2019.11.18
B	ECN NO.:S202211-R14	EIrod		2023.08.23

- NOTES:
- TEST CONDITIONS:
2-1. CONDUCTANCE RESISTANCE 20m Ohm Max.
2-2. HI-POT TEST 500VAC,0.5mA(1SEC)
2-3. INSULATION RESISTANCE: 100M Ohm Min. BY 500 VDC
 - SPECIFICATIONS:SEE "BA SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **6A,PA66**



3D VIEW

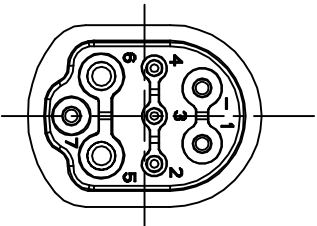

PIN ASSIGNMENTS
FRONT VIEW

E	LIQUID GLUE	1	N/A	BLACK
D	MALE PIN	2	BRASS	Gold flash PLATING OVER NICKEL PLATING
C	MALE PIN	3	BRASS	Gold flash PLATING OVER NICKEL PLATING
B	MALE PIN	3	BRASS	Gold flash PLATING OVER NICKEL PLATING
A	MALE BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Suzhou Singatron Auto Electronics CO.,LTD. 苏州信言汽车电子有限公司				
BATTERY CONNECTOR				
TITLE MALE CONN. (3+3+2)PIN(10A+5A+20A)				

DECIMALS:	ANGLES:	TITLE	BA190117-6B
X :±0.5	X :±2°	DMN	EIrod
XX :±0.3	XX :±1°	CHKD	Jun
XXX :±0.2		APVD	JF
SIZE: A3 SHEET:1 OF 1 REV: B			

CUSTOMER COPY