
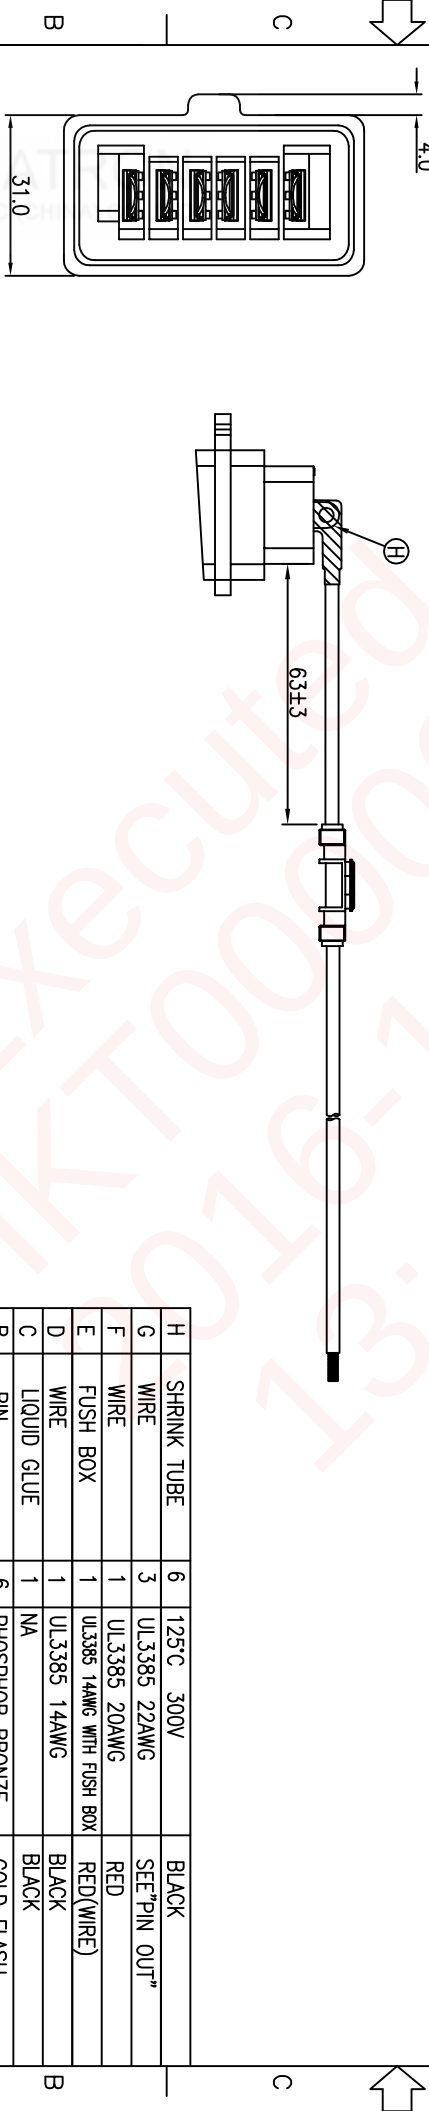


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.S151218-3A	Yang	2016.07.20
B	ECN NO.S160932-C	Yang	2016.09.28

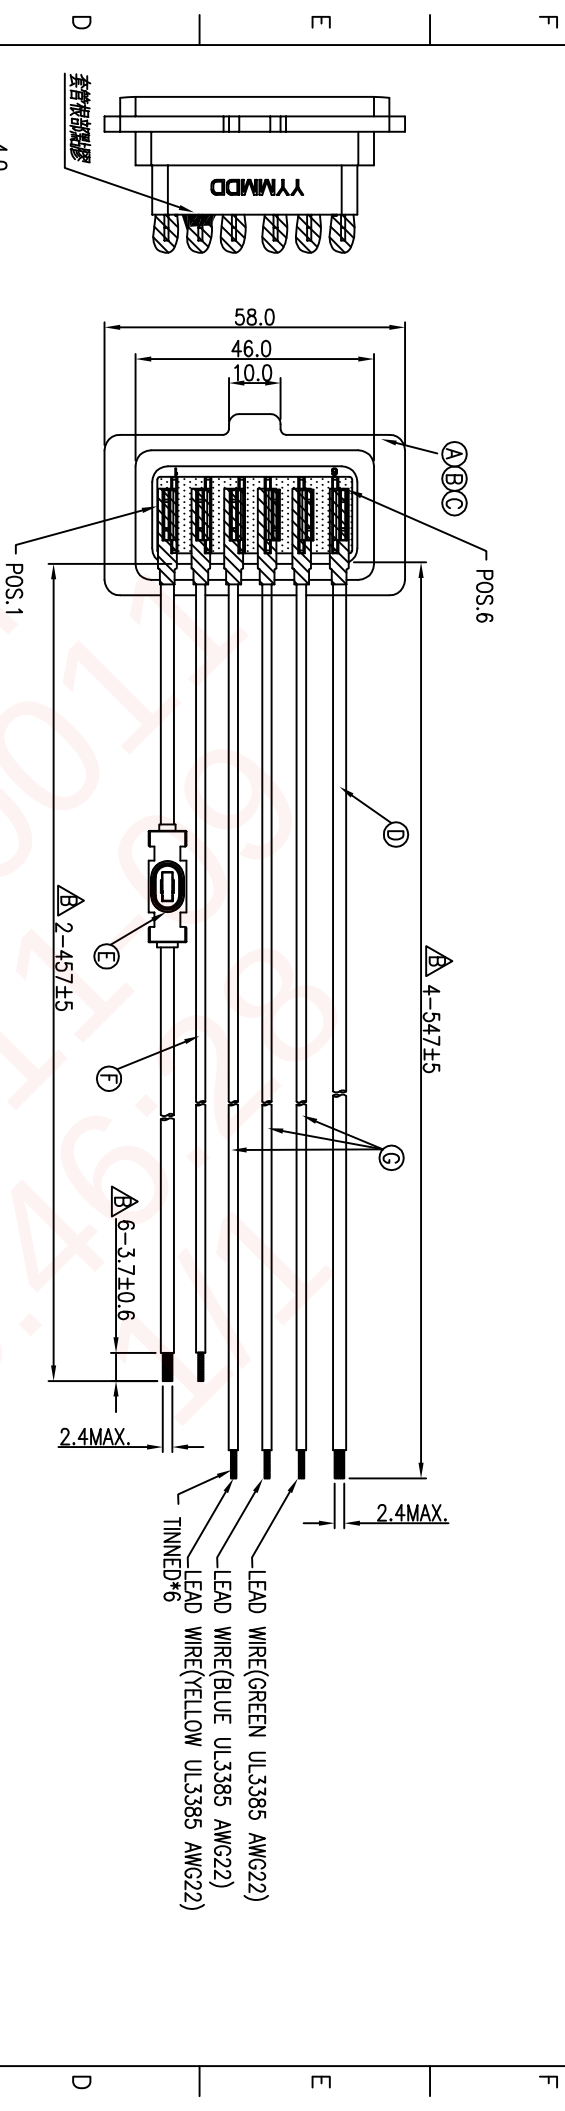

6	14#	BLACK
5	22#	GREEN
4	22#	BLUE
3	22#	YELLOW
2	20#	RED
1	14#	RED WITH FUSE
CONN.		WIRE COLOR

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 36V DC 30A

1-2. CONTACT RESISTANCE: 1Ω MAX.

1-3. HI-POT TEST 500VAC,5mA(1SEC)

1-4. INSULATION RESISTANCE: 100MΩ MIN. BY 500 VDC

2. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

3. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

H	SHRINK TUBE	6	125°C	300V	BLACK
G	WIRE	3	UL3385	22AWG	SEE"PIN OUT"
F	WIRE	1	UL3385	20AWG	RED
E	FUSH BOX	1	UL3385	14AWG WITH FUSH BOX	RED(WIRE)
D	WIRE	1	UL3385	14AWG	BLACK
C	LIQUID GLUE	1	NA		BLACK
B	PIN	6	PHOSPHOR	BRONZE	GOLD FLASH
A	HOUSING	1	PA66+GF		BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES					
DECIMALS:	ANGLES:				
X :±0.5	X :±2°				
X.X :±0.3	X.X :±1°				
X.XX :±0.2					
TITLE	BATTERY 6PIN 30A WITH WIRE				
DWN	Yang	PART NO.	2BW1017-V06R01H		
CHKD	Harlen	SCALE	2:1	UNIT:	mm
APVD	Steve	SIZE:	A3	SHEET:	1 OF 1
				REV:	B

CUSTOMER COPY