
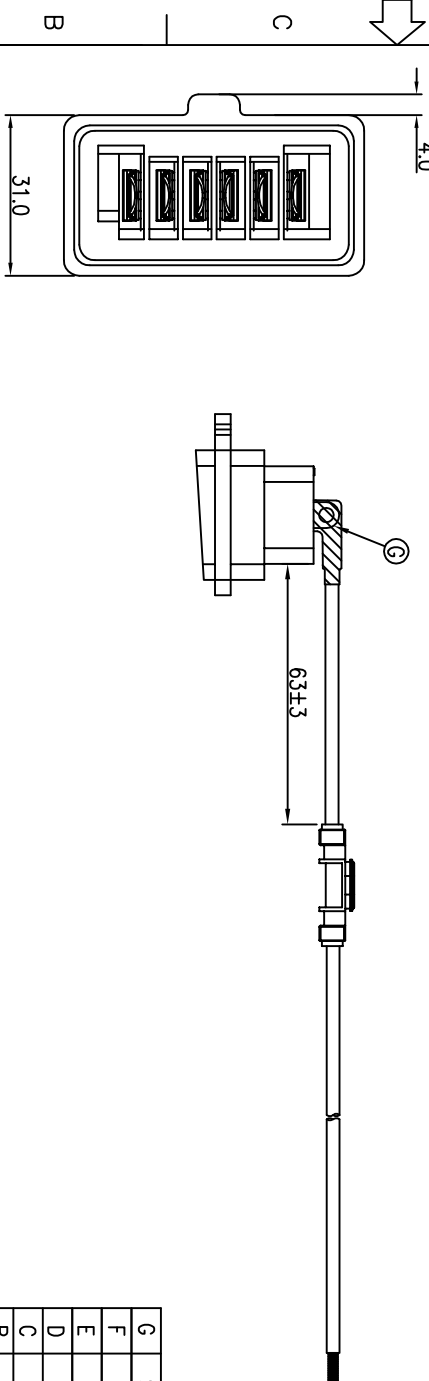


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.S160721-1A	Yang	2017.02.16

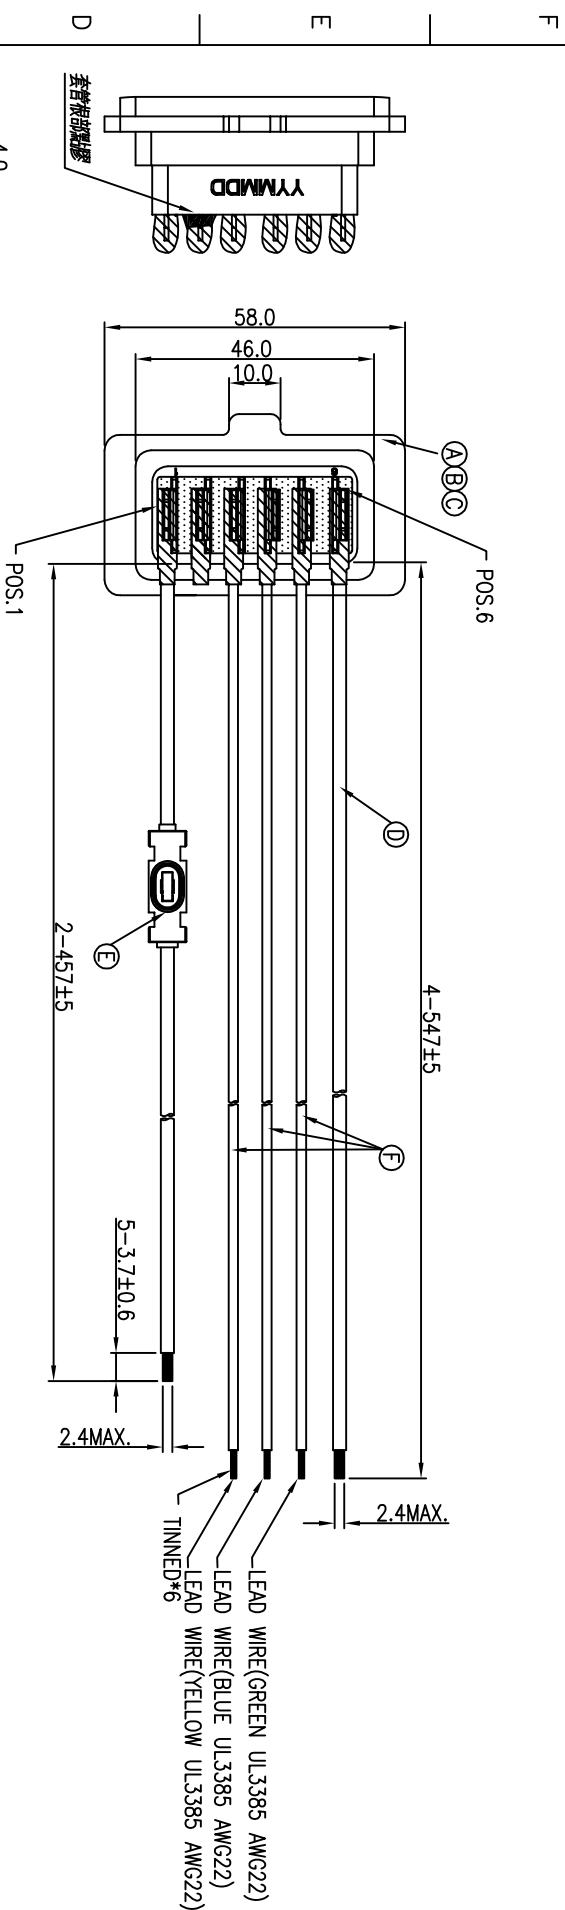

SPECIFICATIONS:

6	14# BLACK
5	22# GREEN
4	22# BLUE
3	22# YELLOW
2	14# RED WITH FUSE
1	WIRE COLOR
CONN.	PIN OUT

1. ELECTRICAL CHARACTERISTICS:
1-1. RATING: 36V DC 30A
1-2. CONTACT RESISTANCE: 10 MAX.
1-3. HI-POT TEST 500VAC,5mA(1SEC)
1-4. INSULATION RESISTANCE: 100MΩ MIN. BY 500 VDC
2. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
3. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: GR. PASS

G	SHRINK TUBE	6	125°C 300V	BLACK
F	WIRE	3	UL3385 22AWG	SEE"PIN OUT"
E	FUSH BOX	1	UL3385 14AWG WITH FUSH BOX	RED(WIRE)
D	WIRE	1	UL3385 14AWG	BLACK
C	LIQUID GLUE	1	NA	BLACK
B	PIN	6	PHOSPHOR BRONZE	GOLD FLASH
A	HOUSING	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
TITLE	BATTERY 6PIN 30A WITH WIRE			
DWN	Yang	PART NO.	2BW1017-V06R02H	
CHKD	Harlen	SCALE	2:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: A

CUSTOMER COPY

