




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JASON	2012.10.03
B	ECN NO.T120155	JASON	2012.12.14
C	ECN NO.T140033	Duke	2015.01.20

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 36V DC 40A
 - 1-2. CONTACT RESISTANCE: 5.0m Ω MAX.(PIN+/PIN- INITIAL PRE PIN)
 - 1-3. CONTACT RESISTANCE: 60m Ω MAX.(SIGNAL PIN+WIRES INITIAL PRE PIN)
 - MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 7.0 KGF MAX. (INITIAL)
 - 2-2. WITHDRAWAL FORCE :3.0 $\pm$ 2KGF (INITIAL)
 - LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "2BW1021-001210H SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION MARK ON JACK: 
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS**
 - PACKAGING: BAG



MATING PART
P/N : 2BA1020 SERIES

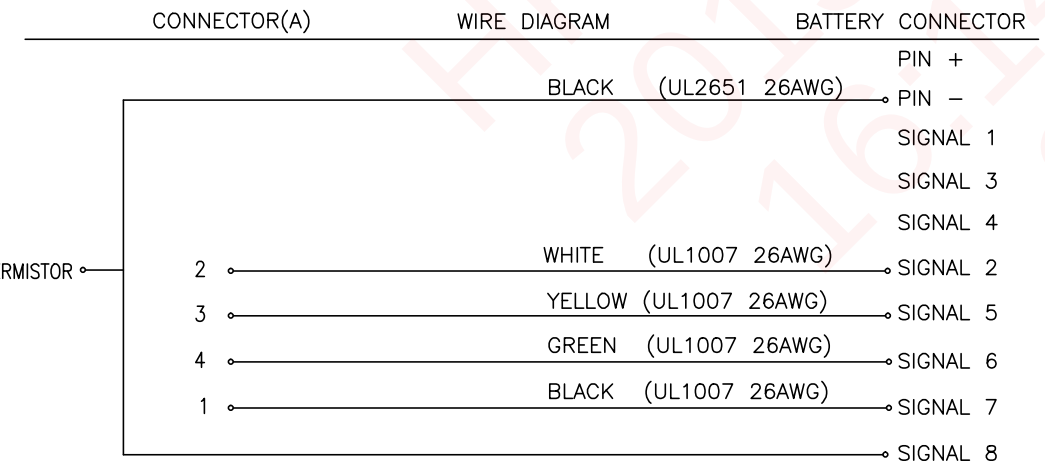

F	TERHEAT SHRINK TUBE	8	ø2.4*L15含膠	BLACK
E	TERHEAT SHRINK TUBE	1	ø6.0*L50	BLACK
D	WIRE	4	SEE WIRE DIAGRAM	
C	THERMISTOR	1	SS133-103F343FL21034	N/A
B	CONNECTOR A	1	HOUSING(REF.CP-H20-5)	WHITE
			TERMINAL	SILVER PLATING
A	BATTERY CONNECTOR	1	2BA1021-000210F	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE	BATTERY CONNECTOR+WIRE	
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
		DWN	Duke	PART NO.2BW1021-001210H
		CHKD		SCALE 1:1 UNIT: mm
		APVD		SIZE: A3 SHEET:1 OF 1
		CUSTOMER COPY		
		REV: C		

專案經理	高碩專員
AE Team (HKT)	產品技術部 (HKT)
呂慶成	范義秀琴
2015/01/21 14:43:39	2015/01/21 14:45:27