



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	T121225-1A	Horlen	2013.3.21
B	ECN NO.:	S141231	Susie	2014.12.22

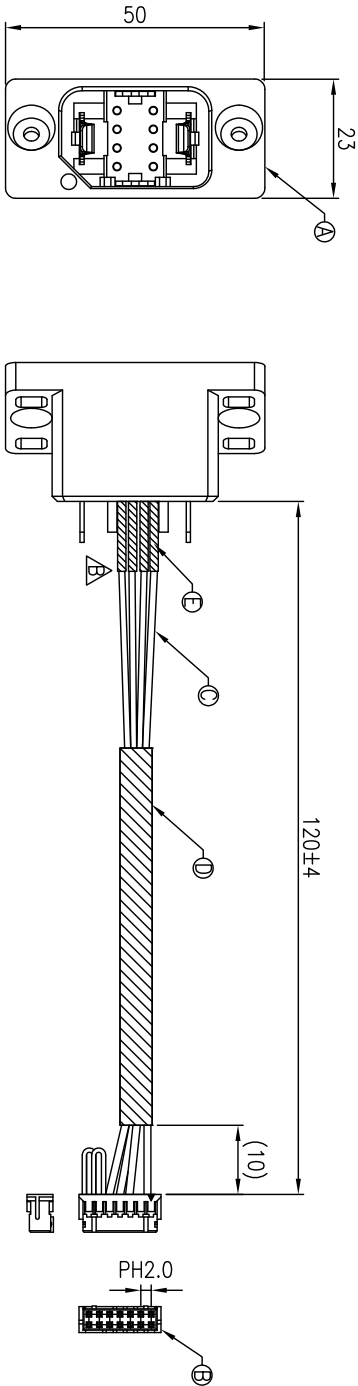

NA	WHITE	13+14
NA	WHITE	11+12
7	BLACK	9
6	GREEN	7
5	YELLOW	5
2	WHITE	1
CONN.1	WIRE COLOR	CONN.2

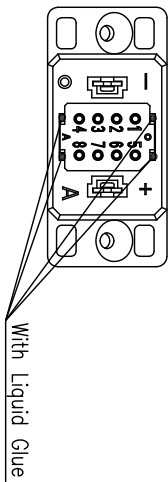

PIN OUT

CONN.1	CONN.2
POS.1 POS.4 POS.5 POS.8	POS.1 POS.2 POS.13 POS.14

- ELECTRICAL CHARACTERISTICS:
- 1-1. RATING: 36V DC 40A
 - 1-2. CONTACT RESISTANCE: 5.0mΩ MAX.(PIN+/PIN- INITIAL PRE PIN)
 - 1-3. CONTACT RESISTANCE: 60mΩ MAX.(SIGNAL PIN+WIRE INITIAL PRE PIN)
- MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE : 7.0 KGF MAX. (INITIAL)
 - 2-2. WITHDRAWAL FORCE :3.0 ± 2KGF (INITIAL)
 - 3. LIFE TEST: 5,000 CYCLES MIN.
 - 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN PASS**

E	SHRINK TUBE	4	ø2.4*L15含膠	BLACK
D	SHRINK TUBE	1	ø5.0*L50	BLACK
C	WIRE	6	UL1007 26AWG	SEE"PIN OUT"
B	CONNECTOR	1	NYON66 UL94V-0	WHITE
A	BATTERY CONNECTOR	8	PHOSPHOR BRONZE	TINNED
NO	DESCRIPTION	1	2BA1021-000210F	
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
DECIMALS:		ANGLES:		
X :±0.5		X :±2°		
X.X :±0.3		X.X :±1°		
X.XX :±0.2				
TITLE		BATTERY CONNECTOR+WIRE		
DWG		Susie		
CHKD		JF		
APVD		Horlen		
SIZE: A3		SHEET:1 OF 1		
REV: B				

CUSTOMER COPY