
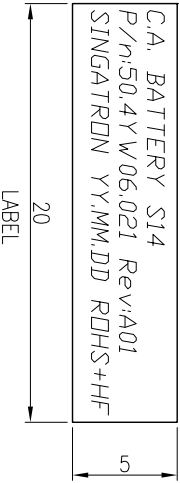
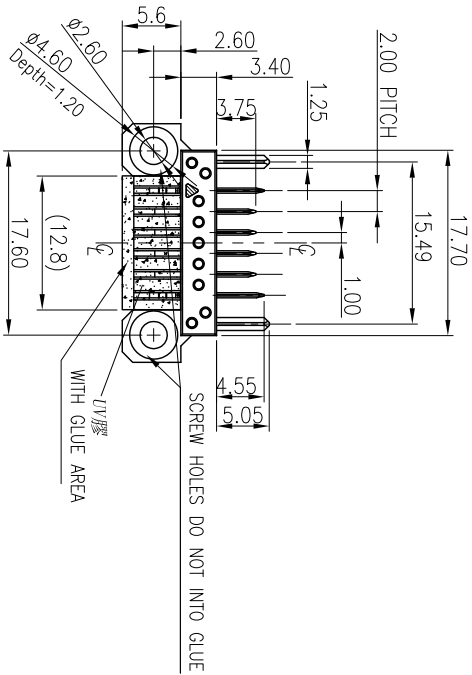


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:1120823-11A	YUREN	2013.05.09
B	ECN NO:S141033	YUREN	2014.12.01

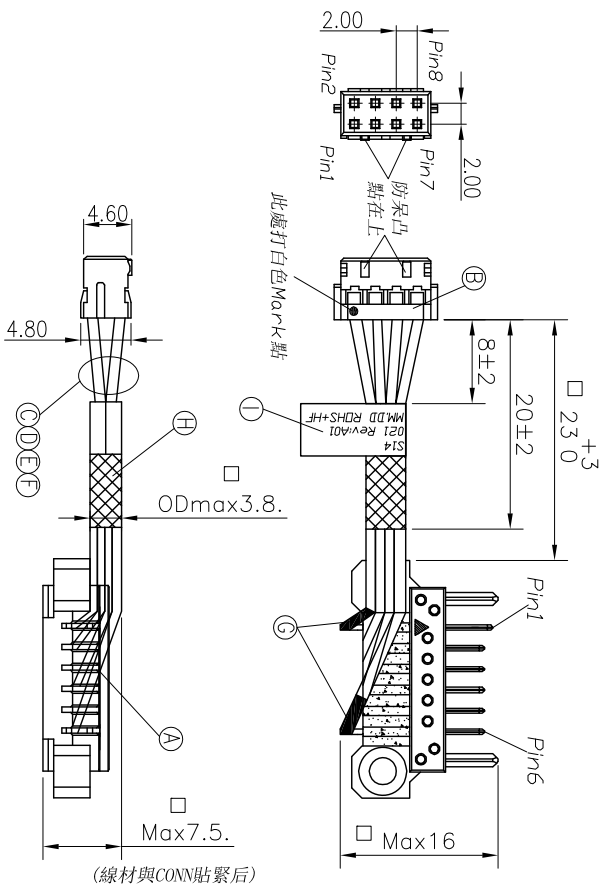

WIRE DIAGRAM

CONNECTOR	WIRE COLOR	BATTERY
POS.1	RED	PIN1
POS.2	RED	PIN1
POS.3	BLACK	PIN4
POS.4		
POS.5	GREEN	PIN5
POS.6	BLUE	PIN2
POS.7	RED	PIN2
POS.8	RED	PIN6

SPECIFICATIONS:
1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: 50V 5.0 A.
- 1-2.CONTACT RESISTANCE:20mΩ MAX (ONLY FOR BATTERY)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
- 1-4.INSULATION RESISTANCE:100MΩ MIN. MEASURED BY 500V DC.
- 2.OTHER GENERAL SPEC. TO REFER " 2BW300X-005414F SPEC".
- 3.TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- 4.HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:



I	LABEL	1	L20*W5	WHITE
H	ACETATE TAPE	1	W10*F0.12	BLACK
G	HEAT SHRINK TUBE	2	FOLYOLEFEN φ2.5*6(125,300)	BLACK
F	WIRE	1	UL10368 26AWG	BLUE
E	WIRE	1	UL10368 26AWG	GREEN
D	WIRE	1	UL10368 26AWG	BLACK
C	WIRE	4	UL10368 26AWG	RED
B	CONNECTOR	8	TER.COPPER ALLOY	PURE TIN
A	BA CONNECTOR	1	HSG:NTLON UL94V-0	BLACK
NO	DESCRIPTION	1	BA CONNECTOR (6PIN)	GOLD PLATED ON CONTACT AREA, BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	DWN	YUREN	PART NO. 2BW3003-005414F
X.X :±0.3	X.X :±1°	CHKD	Cerry	SCALE: 4:1 UNIT: mm
X.XX :±0.2		APVD	Liao	SIZE: A3 SHEET:1 OF 1 REV:B

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司