

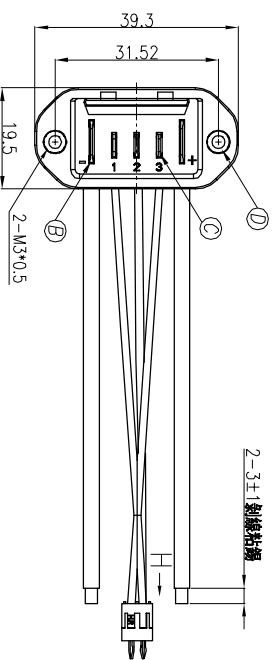


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR	NO:A210219-1A	Jy	2021.12.16

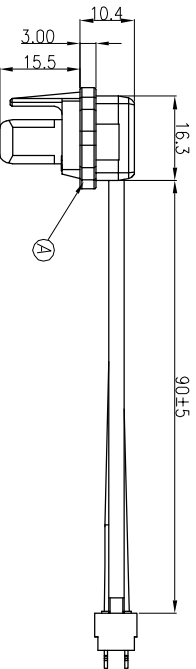

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING:DC48V,20A
 - 1-2. CONTACT RESISTANCE: 20mΩ MAX.(FOR CONNECTOR)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 50M Ω MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION/WITHDRAWL FORCE : 6N~60N
- TEMPERATURE RISE CAN'T EXCEED 30℃ (FOR CONNECTOR)
- LIFE TEST: 1500 CYCLES MIN.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

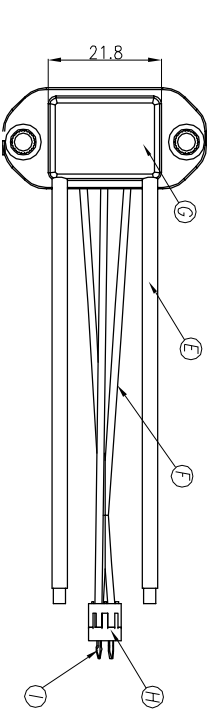