

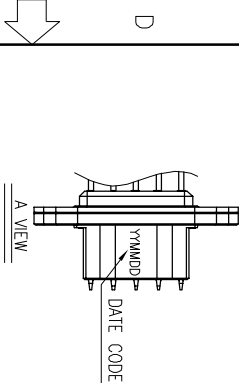


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A210628-2A		Jun	2022.01.15

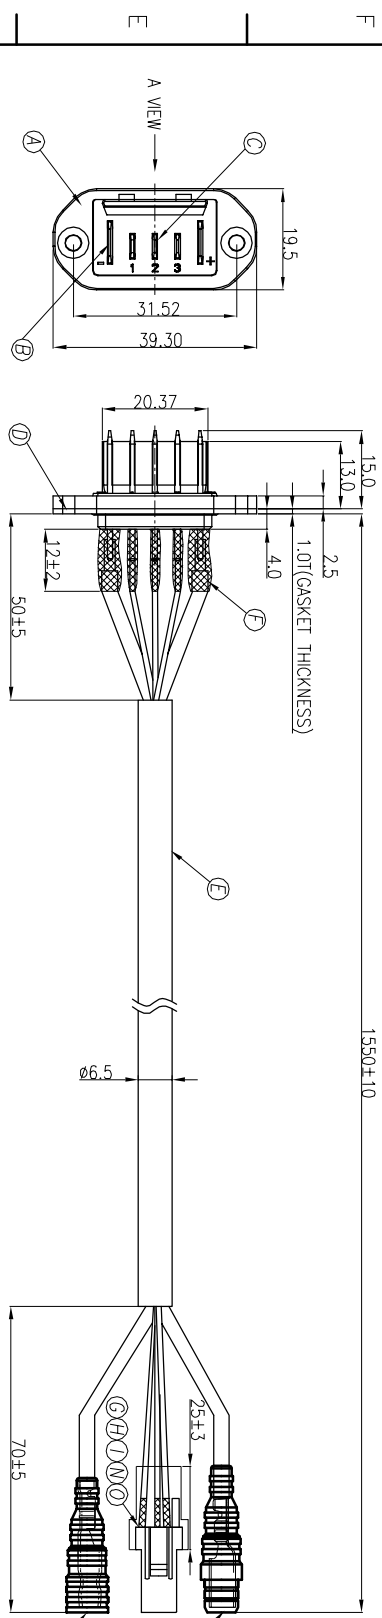

+	RED 1.5mm ²	DJ221
3	GREEN 0.2mm ²	3
2	YELLOW 0.2mm ²	1
1	RED 0.2mm ²	2
-	BLACK 1.5mm ²	DJ211

CONN.1	WIRE SPEC.	CONN.2
PIN OUT		

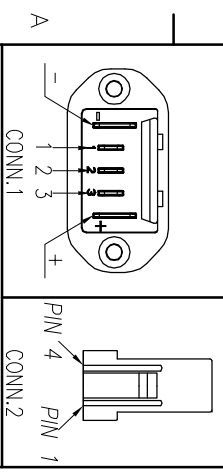

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING:DC48V/20A

1-2. CONTACT RESISTANCE: 20mΩ MAX.(FOR CONNECTOR)

1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.

1-4. INSULATION RESISTANCE: 50MΩ MIN. MEASURED BY 500 VDC

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION/WITHDRAWL FORCE : 6N~60N

3. TEMPERATURE RISE CAN'T EXCEED 30℃ (FOR CONNECTOR)

4. LIFE TEST: 1500 CYCLES MIN.

5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

Pin Assignments	
Front View	

O	HEAT SHRINK TUBE	1		金線套管	BLACK
N	HEAT SHRINK TUBE	3		φ1.5 125° 300V	BLACK
M	護套 2	1		BBS-01-0504B	WHITE
L	護套 1	1		BBS-01-0504A	WHITE
K	子彈頭 2	1		DJ211-4.5A	N/A
J	子彈頭 1	1		DJ221-4.5A	N/A
I	堵頭	1		NORKING:P1-D60008CK-W	WHITE
H	HOUSING	1		3204A1002(P4-D70008-B1)	BLACK
G	TERMINAL	3		NORKING:D70008KS-2	N/A
F	HEAT SHRINK TUBE	5		金線套管	BLACK
E	CABLE	1		0.2mm*3C+1.5mm*2C	BLACK
D	GASKET	1		RUBBER	BLACK
C	SIGNAL TERMINAL	3		BRASS	Ni PLATING
B	POWER TERMINAL	2		BRASS	Ni PLATING
A	HOUSING	1		THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY		MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES					
蘇州新航通汽車電子有限公司					
蘇州新航通汽車電子有限公司					
TITLE MALE BATTERY CONN.					
DWN	Jun	PART NO.	2BW3021-W05R11H		
CHKD	RZ	SCALE/N/A	UNIT: mm		
APVD	JF	SIZE: A3	SHEET: 1 OF 1	REV: A	
CUSTOMER COPY					