

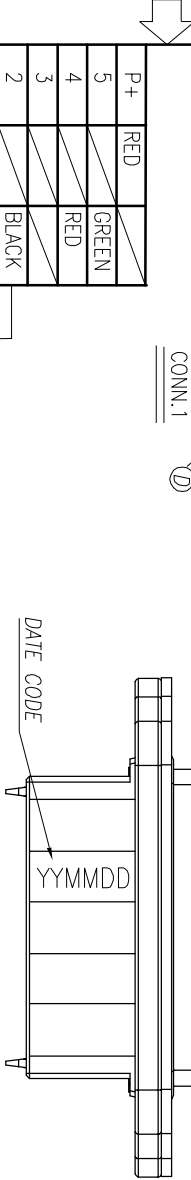
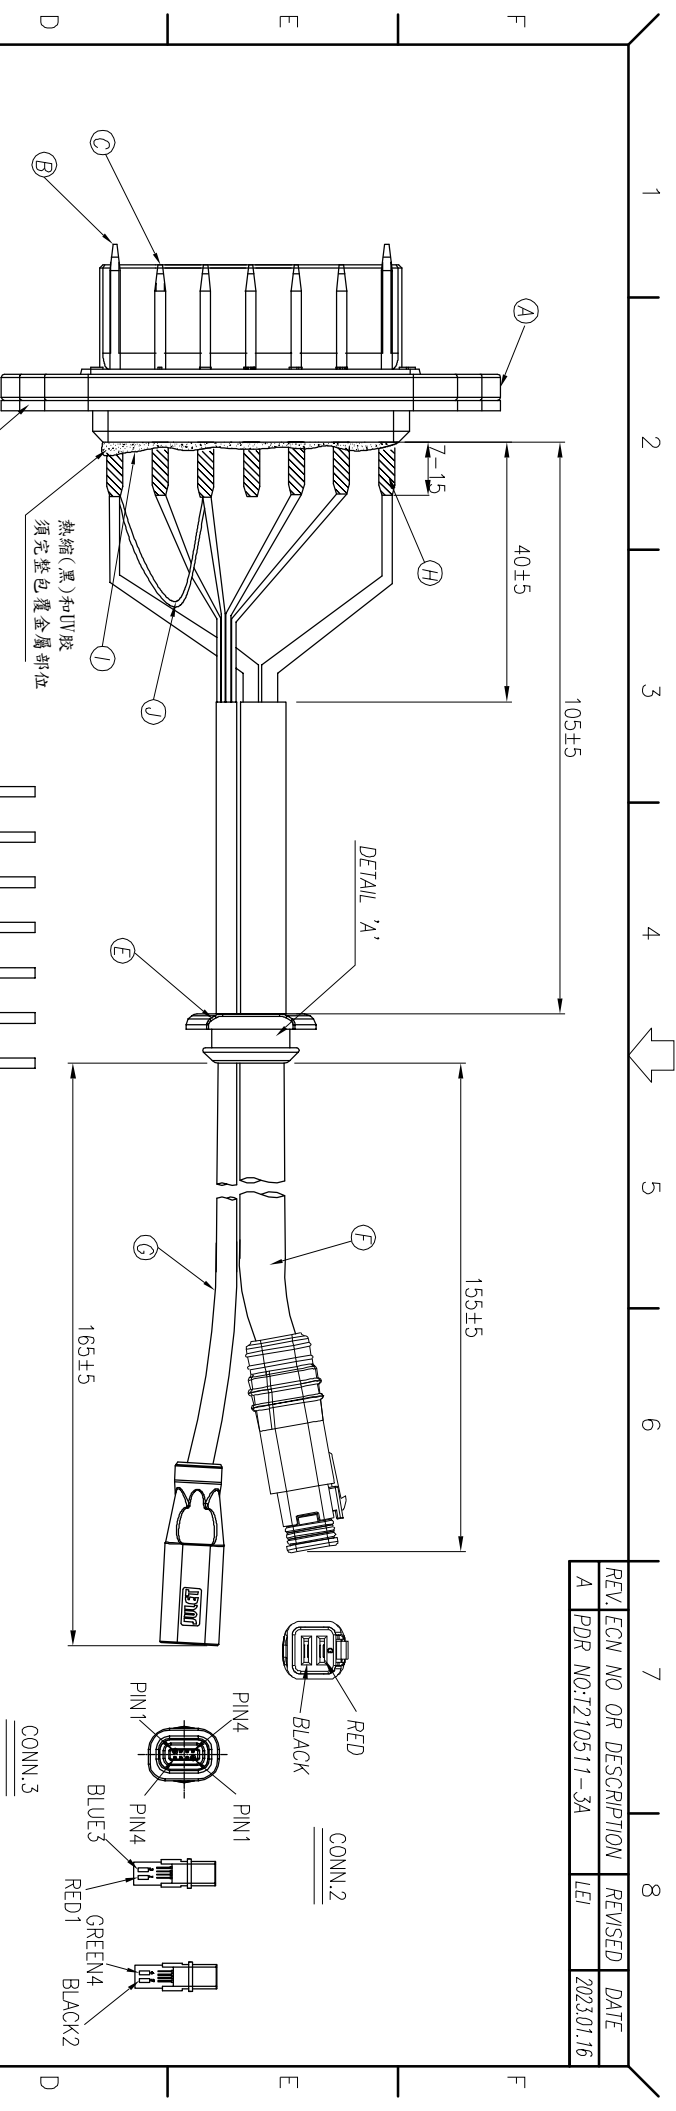


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:1210511-34A	LEI		2023.01.16



P+	RED								
5									
4									
3									
2									
1									
P-	BLACK								
CONN.1	CONN.2	CONN.3							
PIN DEFINE									
CONN.1									

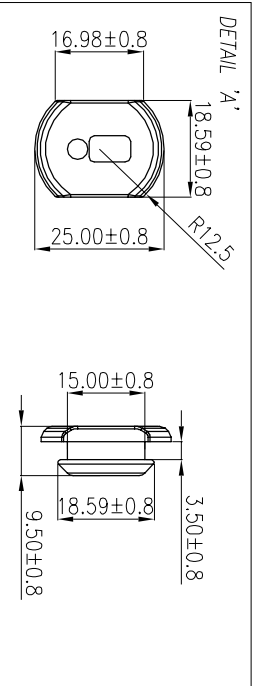

- NOTES:
- ELECTRICAL CHARACTERISTICS:
1-1. RATING: 60V DC 20A (FOR CONN.1)
 - MECHANICAL CHARACTERISTICS:
2-1. INSERTION/WITHDRAWAL FORCE : 6N~80N(FOR CONNECTOR)
 - TEMPERATURE RISE CAN'T EXCEED 30°C (FOR CONNECTOR)
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

J	WIRE	1	UL1007 24AWG	WHITE
I	UV膠	1	NA	WHITE
H	HEAT SHRINK TUBE	7	125°C	BLACK
G	4PIN BATTERY PLUG	1	JL-FB-Z4095AM	BLACK
F	2PIN BATTERY PLUG	1	S-750W BATTERY CABLE(BE)	BLACK
E	SR	1	PVC 64A±5°	BLACK
D	GASKET	1	RUBBER	BLACK
C	SIGNAL TERMINAL	5	BRASS	Ni-PLATING
B	POWER TERMINAL	2	BRASS	Ni-PLATING
A	HOUSING	1	THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
蘇州信音汽車電子有限公司 Suzhou Singatron Auto Electronics CO.,LTD.				
TITLE MALE BATTERY 7 PIN CONN.				
DWN	LEI	PART NO.	2BW3021-W07R02H	
CHKD	Jun	SCALE	2:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: A