



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO. T160111-3A	Yang	2016.11.03

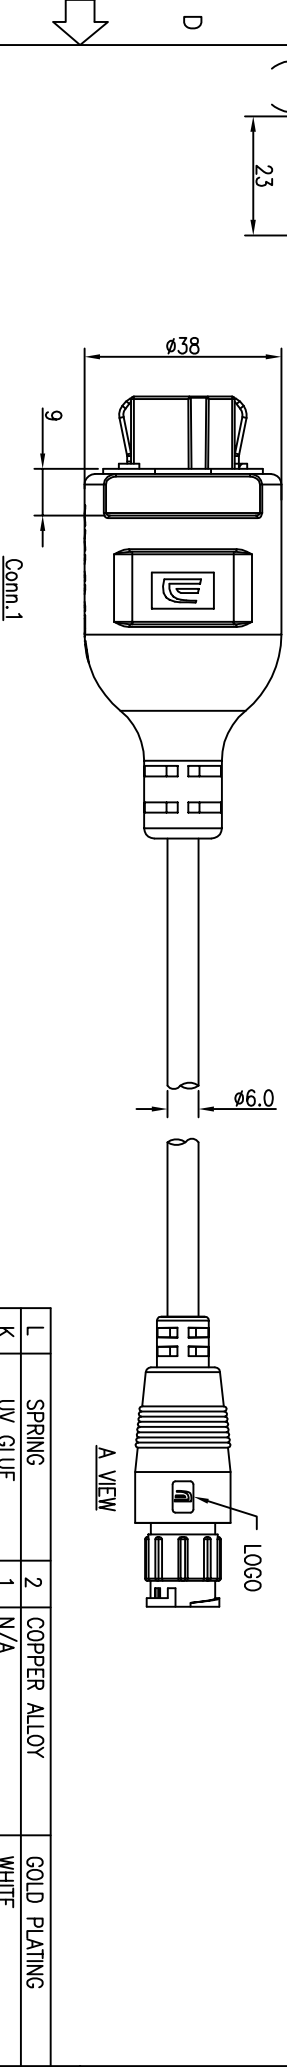

B	PIN(-)	BLACK	1
	PIN(+)	RED	3
	Conn.1	WIRE COLOR	Conn.2
A	Conn.1	PIN OUT	Conn.2
	Conn.1	PIN OUT	Conn.2

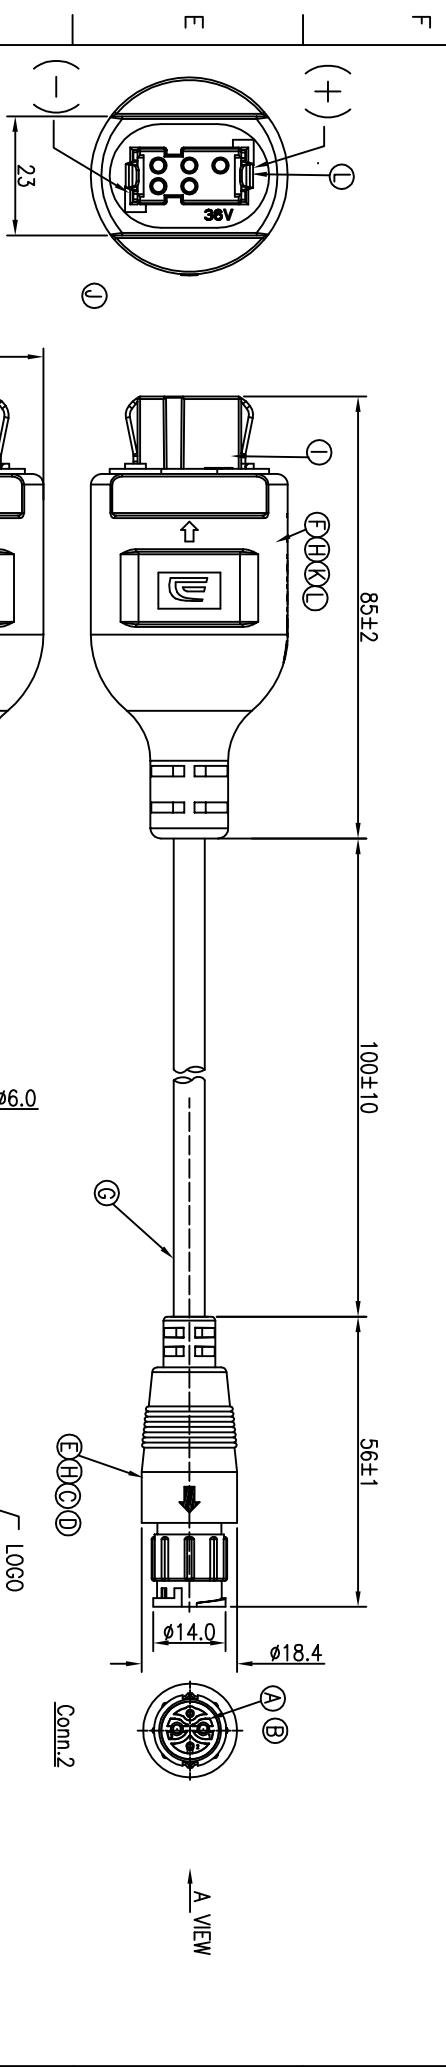

- NOTES:
- CURRENT RATING: 5+10A
 - SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [G.P. PASS]

L	SPRING	2	COPPER ALLOY	GOLD PLATING
K	UV GLUE	1	N/A	WHITE
J	SIGNAL	1	BRASS	SILVER PLATING
I	HOUSING	1	PA66+GF	BLACK
H	OVER MOLD	2	PVC	BLACK
G	CABLE	1	UL2464 18#*2C+AL 0D6.0 (UV)	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	NATURAL
E	INNER MOLD	1	TPU	NATURAL
D	LIQUID GLUE	1	N/A	BLACK
C	TUBE	4	125°C 300V	BLACK
B	FEMALE PIN	4	PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singapore Enterprise Co., Ltd. 信昌企業股份有限公司		
DECIMALS: ANGLES:		TITLE CIRCULAR STANDARD SIZE F CONN. M PIN 2+2PIN(5+10A) LOCK TYPE		
X :±0.5	X :±2°	DWN	Yang	PART NO.2BW3029-W07R02H
X.X :±0.3	X.X :±1°	CHKD	Horten	SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	Steve	SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY				