

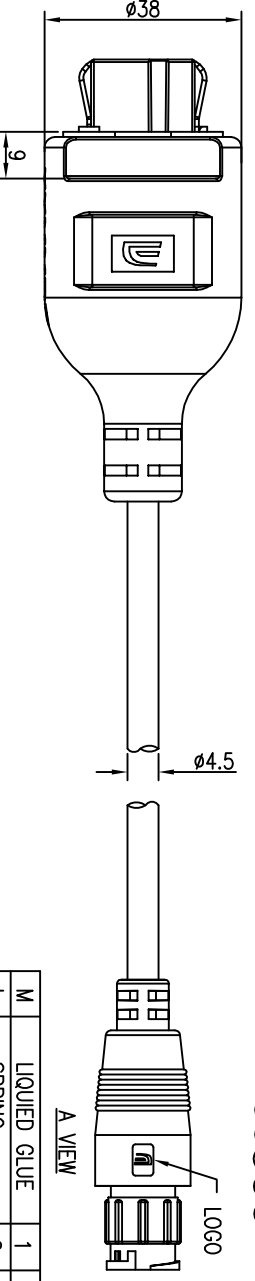


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.	TT60503-14A	Yang	2016.11.03

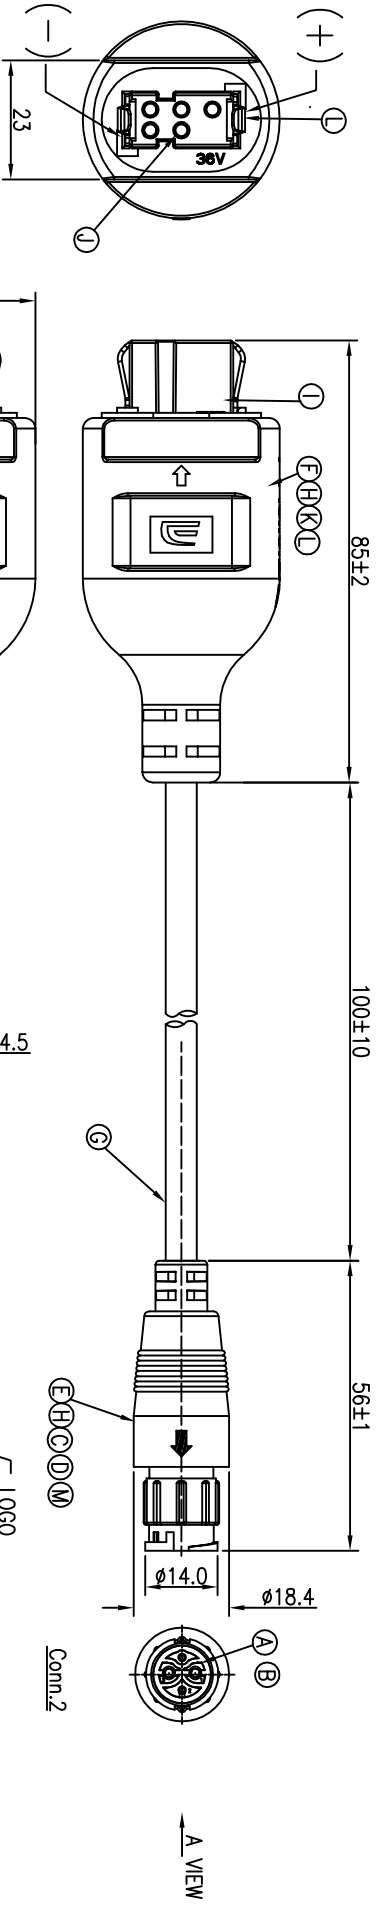


PIN 2	BROWN	4
PIN 1	RED	2
Conn.1	WIRE COLOR	Conn.2

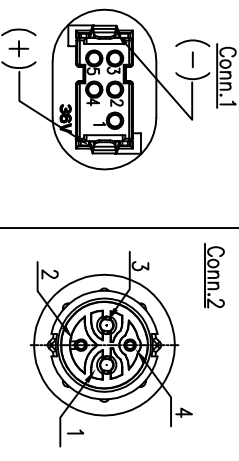

NOTES:

- CURRENT RATING: 5+10A
- SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [G.P. PASS]

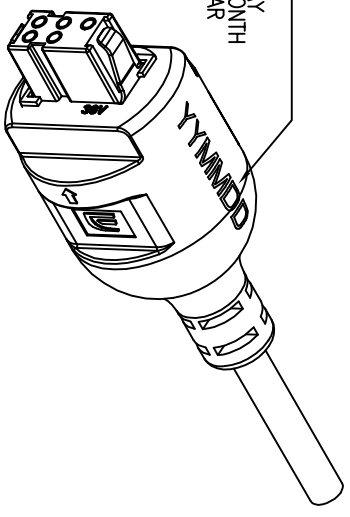

M	LIQUID GLUE	1	N/A	BLACK
L	SPRING	2	COPPER ALLOY	GOLD PLATING
K	UV GLUE	1	N/A	WHITE
J	SIGNAL	1	BRASS	SILVER PLATING
I	HOUSING	1	PA66+GF	BLACK
H	OVER MOLD	2	PVC	BLACK
G	CABLE	1	UL2464 24#*3C+AL OD4.5 (UV)	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	NATURAL
E	INNER MOLD	1	TPU	NATURAL
D	LIQUIED GLUE	1	N/A	BLACK
C	TUBE	4	125C 300V	BLACK
B	FEMALE PIN	4	PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singapore Enterprise Co., Ltd.  信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	CIRCULAR STANDARD SIZE		
X.X :±0.3	X.X :±1°	F CONN. M PIN 2+2PIN(5+10A) LOCK TYPE		
X.XX :±0.2		DWN	Yang	PART NO.2BW3029-W07R04H
		CHKD	Harden	SCALE 1:1 UNIT: mm
		APVD	Steve	SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY				