




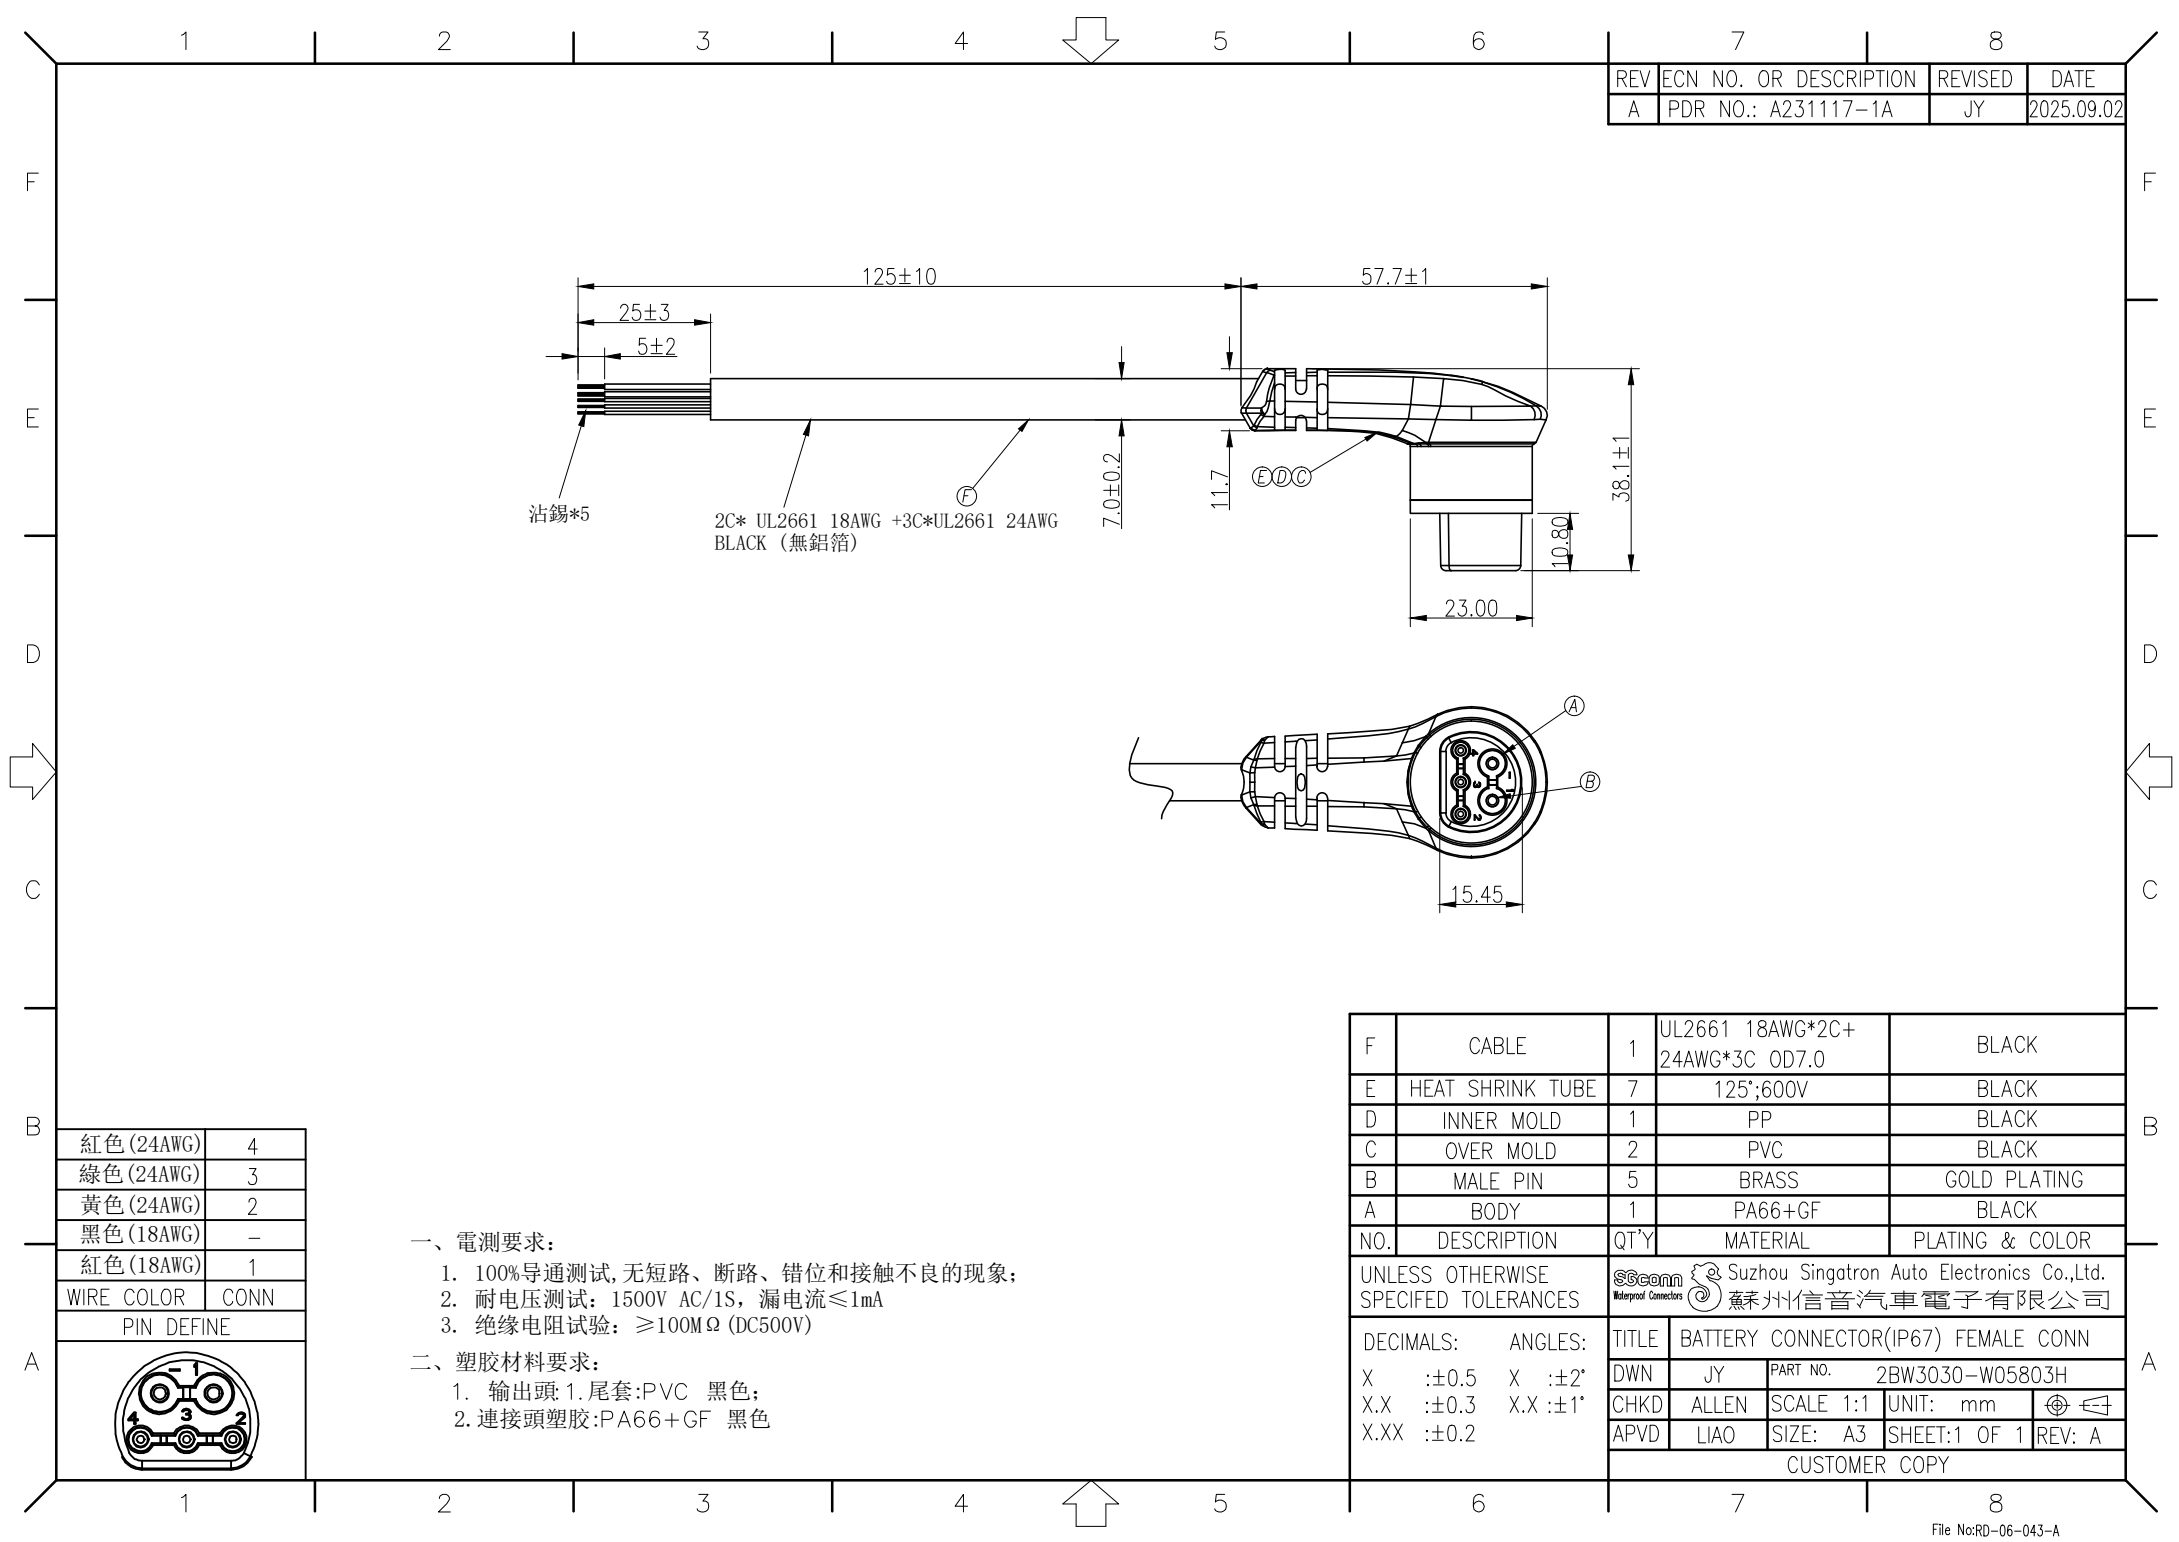

REV	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.: A231117-1A	JY	2025.09.02

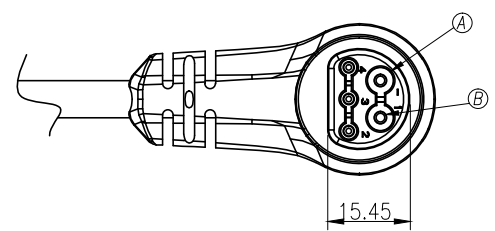

紅色 (24AWG)	4
綠色 (24AWG)	3
黃色 (24AWG)	2
黑色 (18AWG)	-
紅色 (18AWG)	1
WIRE COLOR	CONN

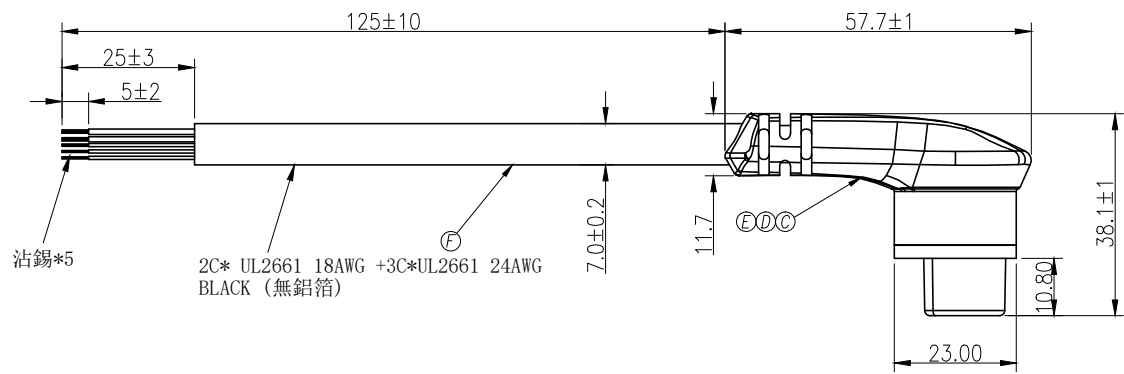

- 一、電測要求:
- 100%導通測試, 無短路、斷路、錯位和接觸不良的現象;
 - 耐電壓測試: 1500V AC/1S, 漏電流≤1mA
 - 絕緣電阻試驗: ≥100MΩ (DC500V)
- 二、塑膠材料要求:
- 輸出頭: 1. 尾套: PVC 黑色;
 - 連接頭塑膠: PA66+GF 黑色

F	CABLE	1	UL2661 18AWG*2C+ 24AWG*3C OD7.0	BLACK
E	HEAT SHRINK TUBE	7	125*;600V	BLACK
D	INNER MOLD	1	PP	BLACK
C	OVER MOLD	2	PVC	BLACK
B	MALE PIN	5	BRASS	GOLD PLATING
A	BODY	1	PA66+GF	BLACK
NO.	DESCRIPTION	QT*Y	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Suzhou Singatron Auto Electronics Co.,Ltd. 蘇州信音汽車電子有限公司		
DECIMALS: ANGLES:		TITLE BATTERY CONNECTOR(IP67) FEMALE CONN		
X :±0.5 X :±2*		DWN JY	PART NO. 2BW3030-W05803H	
X.X :±0.3 X.X :±1*		CHKD ALLEN	SCALE 1:1 UNIT: mm	
X.XX :±0.2		APVD LIAO	SIZE: A3 SHEET:1 OF 1	REV: A
CUSTOMER COPY				