

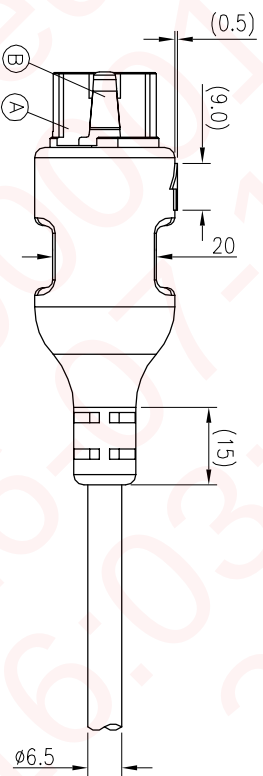
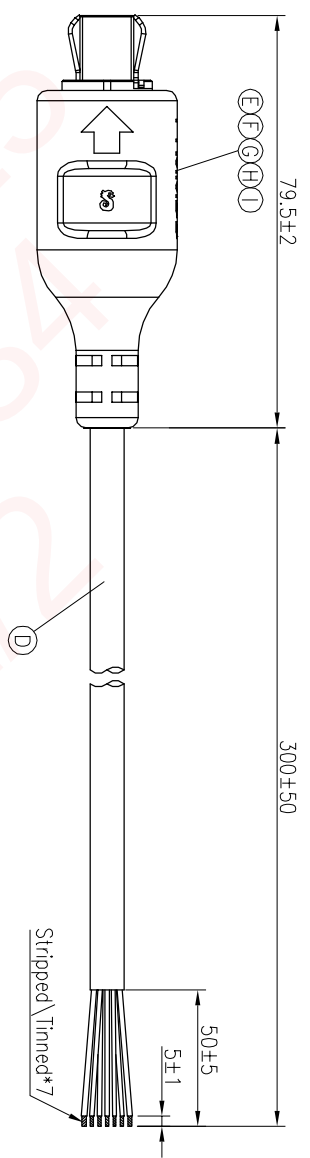


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.S150828-2A	Yang	2015.12.10



WIRE COLOR	BA CONN.	AWG
BLACK	1	26AWG
BROWN	2	26AWG
RED	3	26AWG
YELLOW	4	26AWG
ORANGE	5	26AWG
RED	A (+)	16AWG
BLACK	B (-)	16AWG



NOTES:

- CURRENT RATING: 10A
- SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

I	TUBE	2	125°C 300V	BLACK
H	TUBE	5	125°C 300V	BLACK
G	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	PVC	NATURAL
E	UV GLUE	2	N/A	N/A
D	CABLE	1	UL2464 16AWG*2C+26AWG*5C+1AL	BLACK (PVC JACKET)
C	SIGNAL	5	COPPER ALLOY	SILVER PLATING
B	SPRING	2	BRASS 0.8T	SILVER PLATING
A	HOUSING	1	PA66+30%GF	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singapore Enterprise Co., Ltd. 信晉企業股份有限公司		
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	M CONN. F PIN2+5PIN LOCKING TYPE(36V)		
X.X :±0.3	X.X :±1°	DWN	Yang	PART NO.2BW3031-W07901H
X.XX :±0.2		CHKD	JF	SCALE 1:1 UNIT: mm
		APVD	Horlen	SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY				

CUSTOMER COPY