

1

2

3

4



5

6


7

8

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR.T151208-10A		Yang	2016.08.31

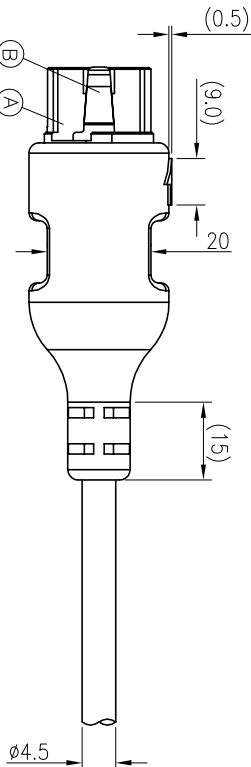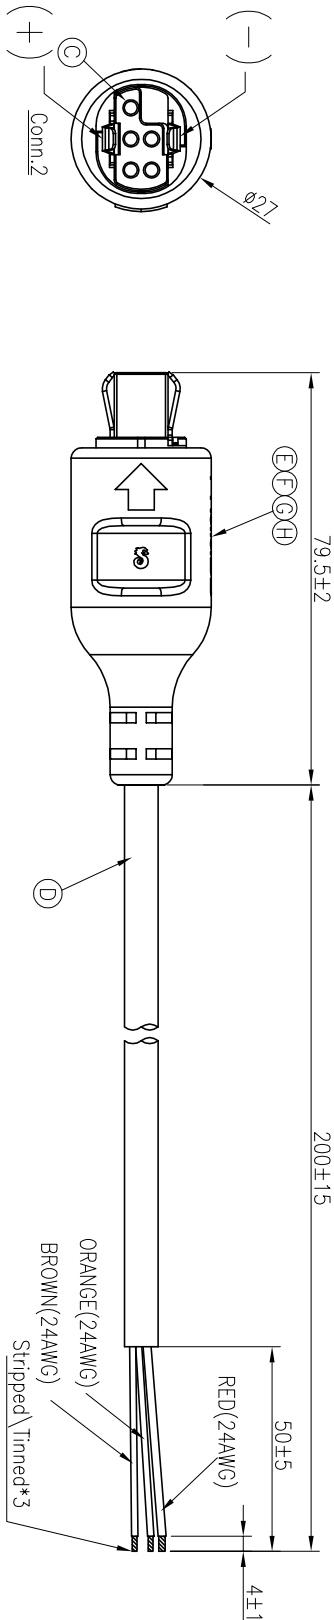


5	ORANGE(24AWG)
3	BROWN(24AWG)
2	RED(24AWG)
BA CONN.	WIRE COLOR



PIN ASSIGNMENTS
FRONT VIEW

NOTES:

1. CURRENT RATING: 10A
2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

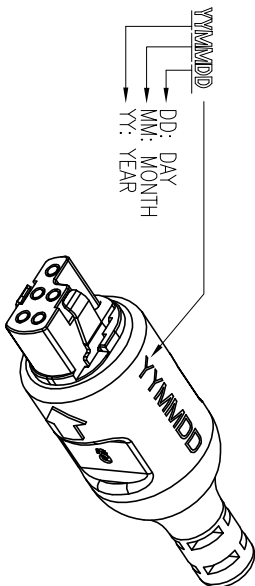

H	TUBE	3	125°C 300V	BLACK
G	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	PVC	NATURAL
E	GLUE	2	N/A	BLACK
D	CABLE	1	U2464 24AWG*3-FL 004.5	BLACK (PVC JACKET)
C	SIGNAL	5	COPPER ALLOY	SILVER PLATING
B	SPRING	2	BRASS 0.8t	SILVER PLATING
A	HOUSING	1	PA66+30%GF	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE M CONN. F PIN2+5PIN LOCKING TYPE(36V)				
DWN	Yang	PART NO.	2BW3031-W07903H	
CHKD	Harlen	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET:1 OF 1	REV:A

CUSTOMER COPY