

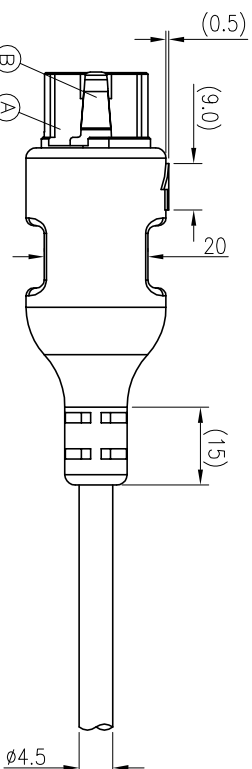


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR.T151208-11A		Yang	2016.08.31

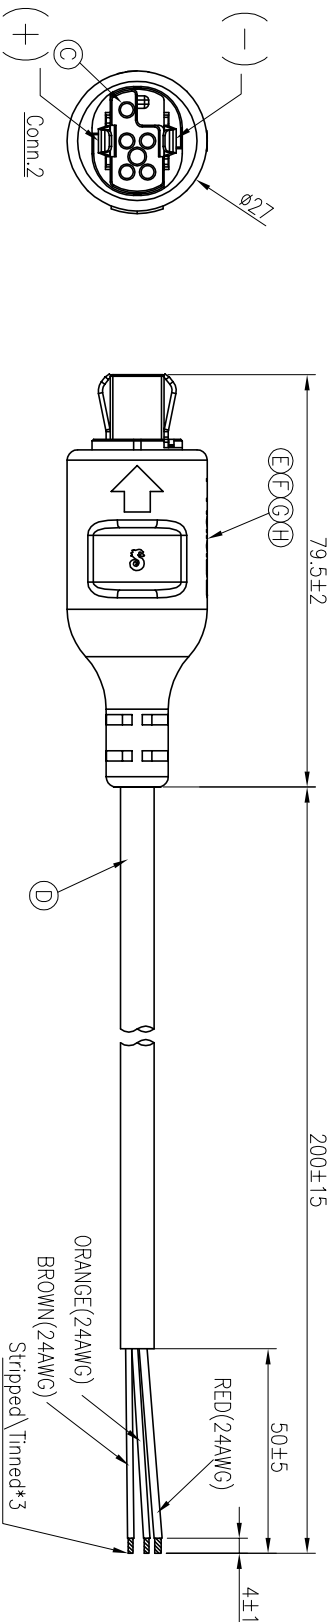

5	ORANGE(24AWG)
3	BROWN(24AWG)
2	RED(24AWG)
BA CONN.	WIRE COLOR




PIN ASSIGNMENTS
FRONT VIEW

NOTES:

1. CURRENT RATING: 10A
2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

YYMMDD
DD: DAY
MM: MONTH
YY: YEAR



H	TUBE	3	125°C 300V	BLACK
G	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	PVC	NATURAL
E	GLUE	2	N/A	BLACK
D	CABLE	1	U2464 24AWG*3-AL	BLACK (PVC JACKET)
C	SIGNAL	5	COPPER ALLOY	SILVER PLATING
B	SPRING	2	BRASS 0.8t	SILVER PLATING
A	HOUSING	1	PA66+30%GF	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

TITLE	M CONN. F PIN2+5PIN LOCKING TYPE(36V)
DMW	Yang
CHKD	Harlen
APVD	Steve
PART NO.	2BW3031-W07904H
SCALE	1:1
UNIT:	mm
SHEET:	1 OF 1
REV:	A

CUSTOMER COPY