




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T191219-4A	Qizhen	2020.11.18
B	ECN NO.S202211-R16	Kesheng	2023.03.13

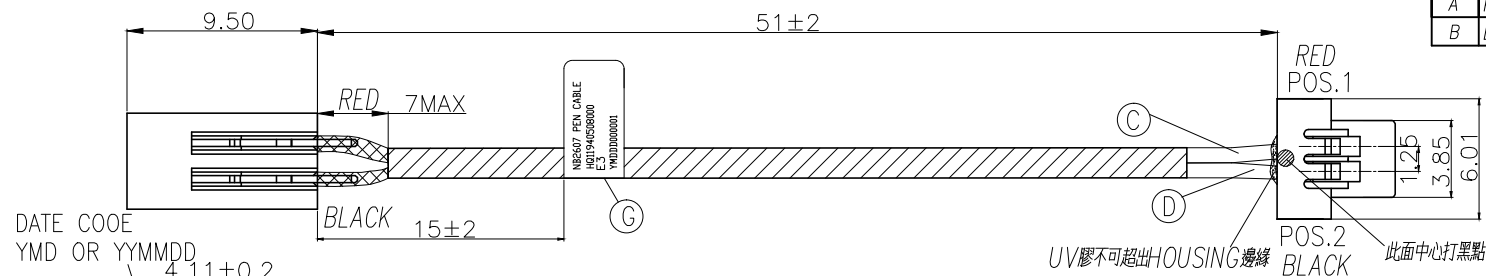

SECTION A-A
NO SCALE

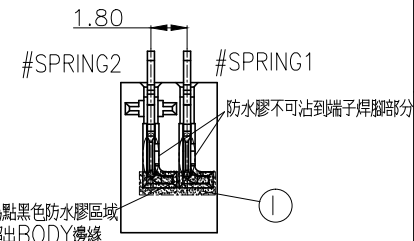

WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS.1	RED (UL10064 28AWG)	SPRING 1
POS.2	BLACK (UL10064 28AWG)	SPRING 2

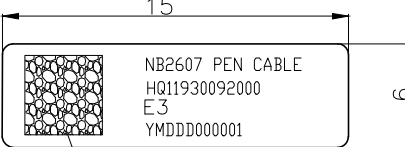

二維碼生成內容為:

HQ11940508000YMDD000001

5位流水碼
規則: 00000-99999

6位日期班別和模具代碼:
規則: 年月日, 如6325D1

6表示16年
3表示3月份, 10/11/12月份用A/B/C代替
25表示25號生產
D表示白班, N表示夜班
1表示第一套模具, 一次類推(無模具信息用O標示)

SPECIFICATIONS:

1. BATTERY AND WIRE SPEC:

1-1.RATING:1A;

1-2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.

1-3.CONTACT RESISTANCE:50mΩ MAX.(ONLY FOR BATTERY)

1-4.NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)

1-5.LIFT TEST:10000 CYCLES MIN.

2. OTHER GENERAL SPEC. TO REFER "2BW3071-002111F SPEC".

3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

4. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:

5. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:

I	JA723(A:B=4:1)	/	/	BLACK
H	LABEL	1	L15*W6	WHITE
G	HEAT SHRINK TUBE	1	Ø1.0(125",300V) VW-1	BLACK
F	UV	/	/	/
E	HEAT SHRINK TUBE	2	Ø1.5(125",300V) VW-1	BLACK
D	WIRE	1	UL10064#28AWG(VW-1/105".30V)	BLACK
C	WIRE	1	UL10064#28AWG(VW-1/105".30V)	RED
B	WIRE TO BOARD CONN. (ACES_50285-002)	2	PHOSPHOR BRONZE	G/F 0.5u
		1	NYLON66 UL94V-0	WHITE
A	BATTERY	1	TO SEE SINGATRON BATTERY P/N:2BA3071-002111F	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS: ANGLES:		TITLE	 BATTERY WITH WIRE	
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
		DWN	Kesheng	PART NO. 2BW3071-006111F
		CHKD	Lussen	SCALE: -- UNIT: mm
		APVD	Liao	SIZE: A3 SHEET:1 OF 1 REV:B
CUSTOMER COPY				