

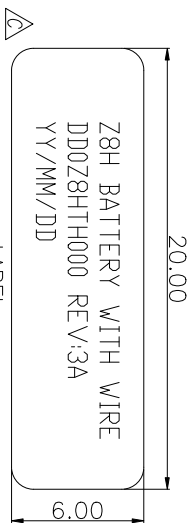
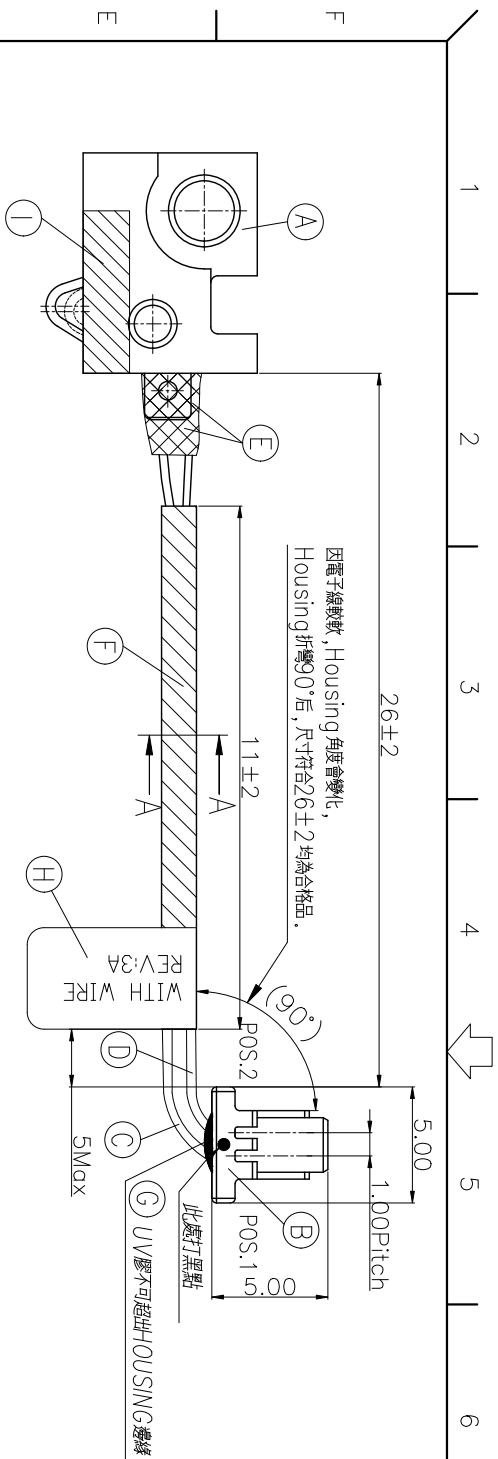
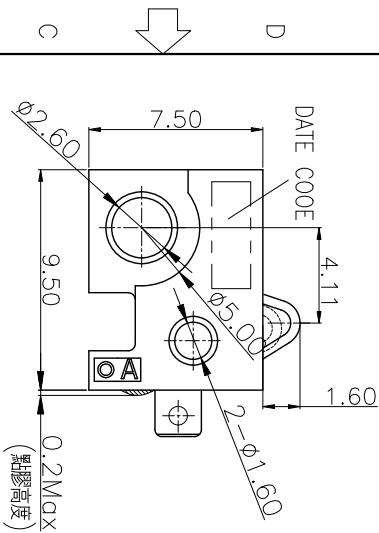


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.T191226-1A		Sugar	2020.11.5
B	ECN NO.S202211-R16		Kesheng	2023.03.13
C	ECN NO.S202404-E03		Springwu	2024.07.08

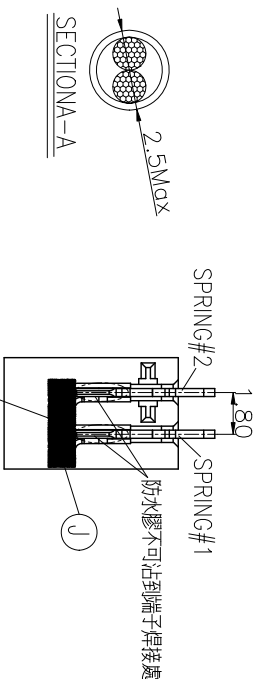

WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS. 1	RED (UL1006# 28AWG)	SPRING 1
POS. 2	BLACK (UL1006# 28AWG)	SPRING 2



SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING:3.3V 1A

1-2. CONTACT RESISTANCE: 50 mΩ MAX.

1-3. INSULATION RESISTANCE: 100 MΩ MIN.

1-4. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC MINFOR ONE MINUTE.

2. MECHANICAL PERFORMANCES:

2-1. NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)

2-2. MECHANICAL OPERATION: 10000 CYCLES.

3. OTHER GENERAL SPEC. TO REFER "2BW3071-007111F SPEC".


4. TO CONFORM TO SINGAITRON HAZARDOUS SUBSTANCE FREE SPEC.

5. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:

6. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:

7. PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.

DATE CODE: YYMMDD(YY:YEAR MM:MONTH DD:DAY)

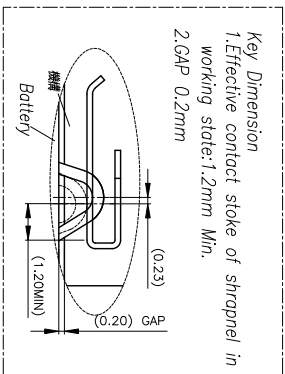

J	JA723			BLACK
I	RUBBER	1	L7*W2*T0.7(公釐)	BLACK
H	LABEL	1	L20*W6	WHITE
G	UV GLUE	1	8860 匯達	WHITE
F	HEAT SHRINK TUBE	1	φ1.5(125,300V)	BLACK
E	HEAT SHRINK TUBE	2	φ2.4(125,600V公釐)	BLACK
D	WIRE	1	UL1006#28AWG	BLACK
C	WIRE	1	UL1006#28AWG	RED
B	WIRE TO BOARD CONN. (ACES. 50233-002)	2	PHOSPHOR BRONZE	G/F
A	BATTERY	1	N10N66 UL94V-0	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信言企業股份有限公司				
TITLE BATTERY WITH WIRE				
DWN	Springwu	PART NO.	2BW3071-007111F	
CHKD	Boye	SCALE: --	UNIT: mm	
APVD	Boye	SIZE: A3	SHEET: 1 OF 1	REV:C

CUSTOMER COPY				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				

