

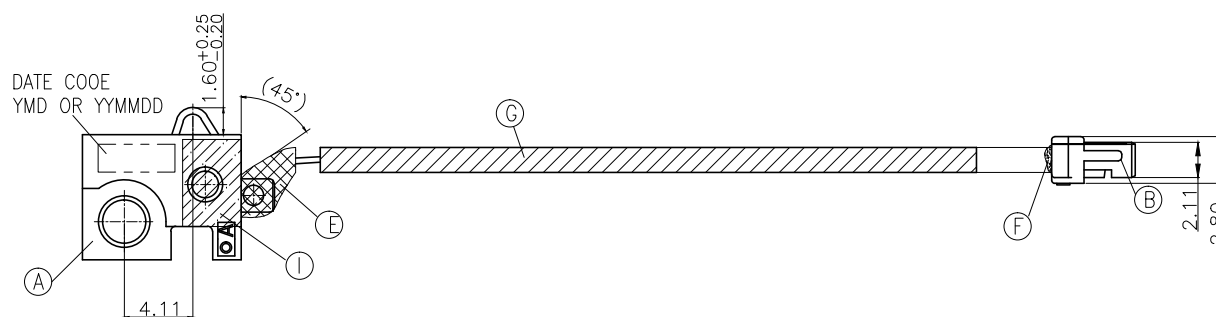

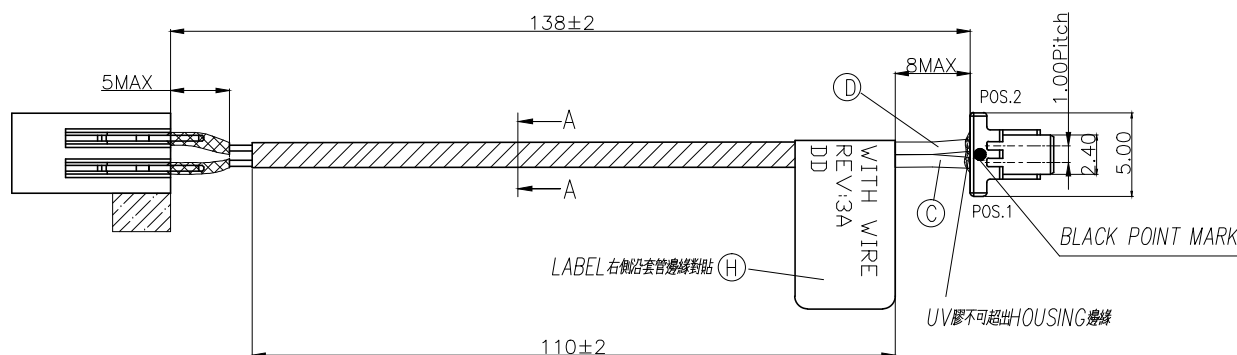
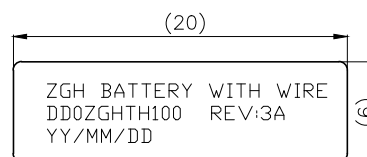


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T191231-2A	Kesheng	2020.11.13
B	ECN NO.S202211-R16 /B/	Kesheng	2023.03.13



WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS.1	RED (UL10064 28AWG)	SPRING 1
POS.2	BLACK (UL10064 28AWG)	SPRING 2



SPECIFICATIONS:

1. BATTERY AND WIRE SPEC:

1-1.RATING:1A;

1-2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.

1-3.CONTACT RESISTANCE:50mΩ MAX.(ONLY FOR BATTERY)

1-4.NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)

1-5.LIFT TEST:10000 CYCLES MIN.

2. OTHER GENERAL SPEC. TO REFER "2BW3071-008111F SPEC".

3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

4. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:

5. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:

6. PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.

DATE CODE:YYMMDD (YY:YEAR MM:MONTH DD:DAY)

J	JA723(A:B=4:1)	/	/	BLACK
I	RUBBER	1	L3.5*W5.2 2.3T	BLACK
H	LABLE	1	L20*W6	WHITE
G	HEAT SHRINK TUBE	1	φ1.0(125',300V) VW-1	BLACK
F	UV	/	/	/
E	HEAT SHRINK TUBE	2	φ1.6	BLACK
D	WIRE	1	UL10064#28AWG(VW-1/105'.30V)	BLACK
C	WIRE	1	UL10064#28AWG(VW-1/105'.30V)	RED
B	WIRE TO BOARD CONN. (ACES_50233-002)	2	PHOSPHOR BRONZE	GOLD FLASH
		1	NYLON66 UL94V-0	WHITE
A	BATTERY	1	TO SEE SINGATRON BATTERY P/N:3BA3071-002111F	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	BATTERY WITH WIRE	
X :±0.5	X :±2'	DWN	Kesheng	PART NO. 2BW3071-008111F
X.X :±0.3	X.X :±1'	CHKD	Lussen	SCALE: -- UNIT: mm
X.XX :±0.2		APVD	Liao	SIZE: A3 SHEET:1 OF 1 REV:B
CUSTOMER COPY				