
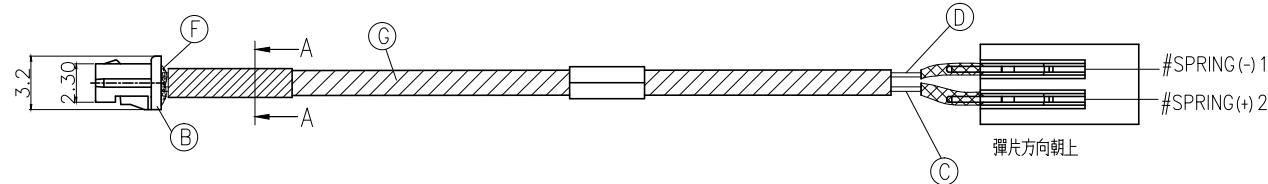
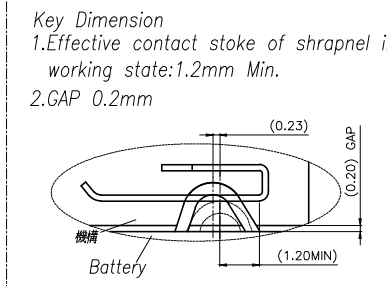


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T200312-2A	Kesheng	2020.12.15
B	ECN NO.S202211-R16	Kesheng	2023.03.13

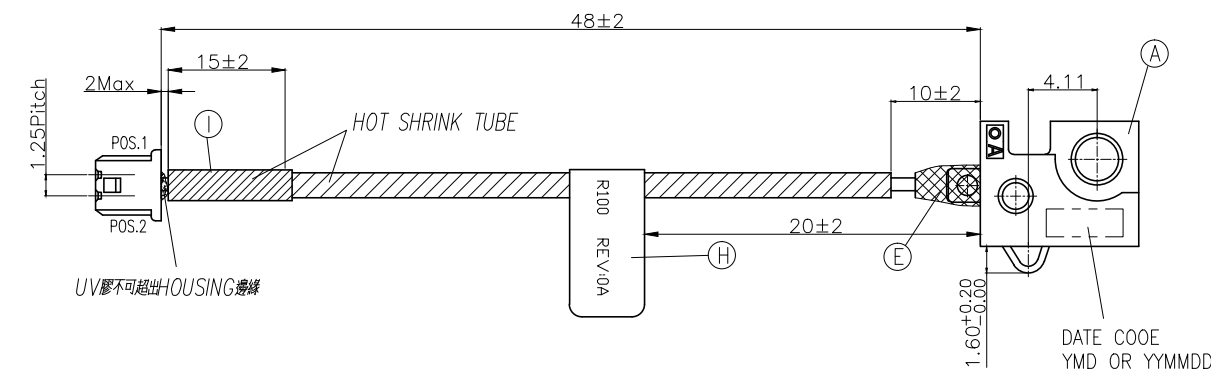

WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS.1	RED (UL10064 28AWG)	SPRING(+) 2
POS.2	BLACK (UL10064 28AWG)	SPRING(-) 1

SPECIFICATIONS:

1. BATTERY AND WIRE SPEC:

1-1.RATING:1A;

1-2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.

1-3.CONTACT RESISTANCE:50mΩ MAX.(ONLY FOR BATTERY)

1-4.NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)

1-5.LIFT TEST:10000 CYCLES MIN.

2. OTHER GENERAL SPEC. TO REFER "2BW3071-009111F SPEC".


3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

4. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT.

5. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING.

6. PRINTED DATE CODE"YYMMDD" ON TOP OF CONNECTOR.

DATE CODE:YYMMDD (YY:YEAR MM:MONTH DD:DAY)

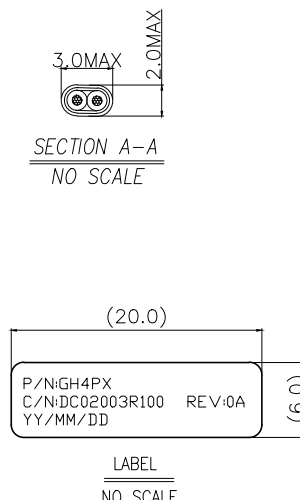

J	JA723(A:B=4:1)	/	/	BLACK
I	HEAT SHRINK TUBE	1	ø1.5	BLACK
H	LABLE	1	L20*W6	WHITE
G	HEAT SHRINK TUBE	1	ø1.0	BLACK
F	UV	/	/	/
E	HEAT SHRINK TUBE	2	ø1.6	BLACK
D	WIRE	1	UL10064#28AWG(VW-1/105'.30V)	BLACK
C	WIRE	1	UL10064#28AWG(VW-1/105'.30V)	RED
B	WIRE TO BOARD CONN. (ACES_50276-002)	2	PHOSPHOR BRONZE	GOLD FLASH
A	BATTERY	1	NYLON66 UL94V-0	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFED TOLERANCES	Singatron Enterprise Co., Ltd. 信音企業股份有限公司			
DECIMALS:	ANGLES:	TITLE	BATTERY WITH WIRE	
X :±0.5	X :±2'	DWN	Kesheng	PART NO. 2BW3071-009111F
X.X :±0.3	X.X :±1'	CHKD	Lussen	SCALE: -- UNIT: mm
X.XX :±0.2		APVD	Liao	SIZE: A3 SHEET:1 OF 1 REV: B
CUSTOMER COPY				