





REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR	NO.1211122-5A	Xuehua	2022.5.12
B	ECN	NO.S202307-C26	JIE-FU	2023.10.18
C	ECN	NO.S202312-C18	Spring-wu	2024.04.24



SECTION-A-A'

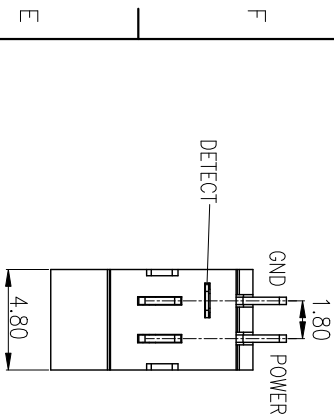


Ø2.20MM MAX

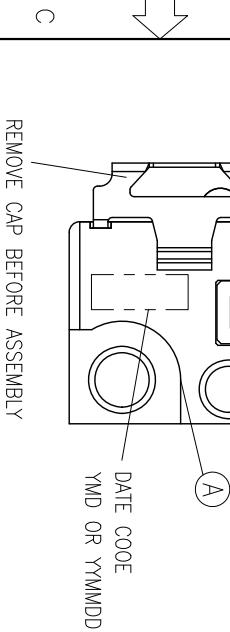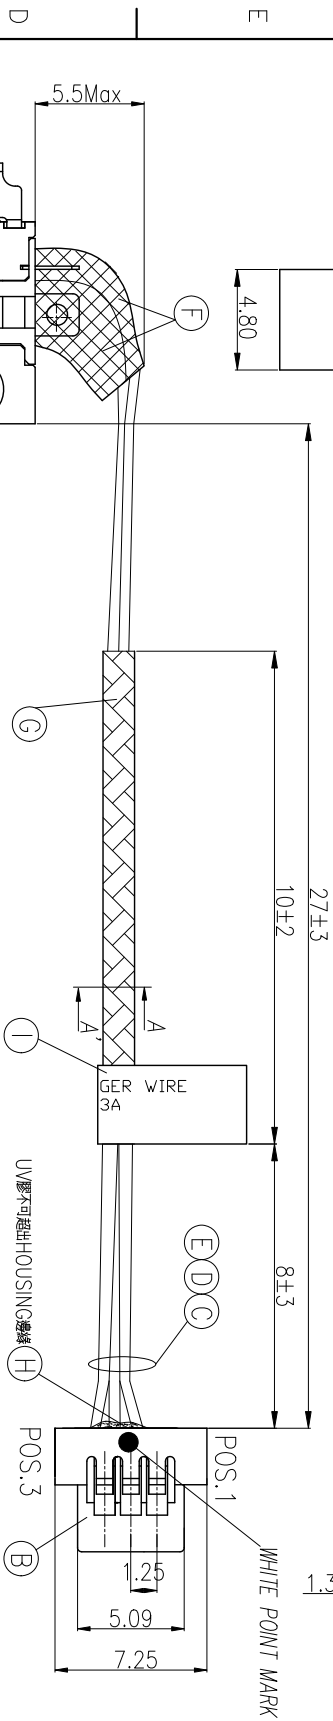

SPECIFICATIONS:
1. BATTERY AND WIRE SPEC:
1-1. RATING: 3.3V OR 5.0V/0.4A;
1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
1-3. CONTACT RESISTANCE: 50mΩ MAX. (ONLY FOR BATTERY)
1-4. NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)
1-5. LIFE TEST: 5000 CYCLES MIN.

2. OTHER GENERAL SPEC. TO REFER "2BW3071-012111F SPEC".
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT.
5. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING.
6. PRINTED DATE CODE "YMMDD" ON TOP OF CONNECTOR.
DATE CODE: "YMMDD" (YY: YEAR MM: MONTH DD: DAY)

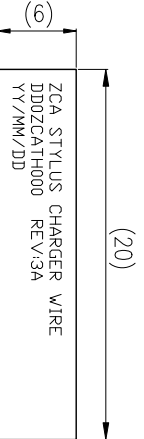

LABEL

"0" 数字, "1" 符号

WIRE DIAGRAM			
WIRE TO BOARD CONNECTOR	WIRE	BATTERY	
POS.1	RED (UL10064 28AWG)	POWER	
POS.2	BROWN (UL10064 28AWG)	DETECT	
POS.3	BLACK (UL10064 28AWG)	GND	

I	LABEL	1	120*W6	WHITE
H	UV	/	/	/
G	HEAT SHRINK TUBE	1	Ø1.5(1.25, 3.00V) WM-1	BLACK
F	HEAT SHRINK TUBE	3	Ø1.6含膠	BLACK
E	WIRE	1	UL10064#28AWG(VW-1/105, 30V)	BROWN
D	WIRE	1	UL10064#28AWG(VW-1/105, 30V)	BLACK
C	WIRE	1	UL10064#28AWG(VW-1/105, 30V)	RED
B	WIRE TO BOARD CONN. (ACES00285-003H0H1-001)	3	PHOSPHOR BRONZE	G/F 0.5u
A	STYLUS CHARGER	1	NYLON66 UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	Singapore Enterprise Co., Ltd. 信音企業股份有限公司		
X :±0.5	X :±2°	TITLE	STYLUS CHARGER WIRE	
X.X :±0.3	X.X :±1°	DWN	Springwu	PART NO. 2BW3071-012111F
X.XX :±0.2		CHKD	Boye	SCALE: -- UNIT: mm
		APVD	Liao	SIZE: A3 SHEET:1 OF 1 REV:C
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信營企業股份有限公司