

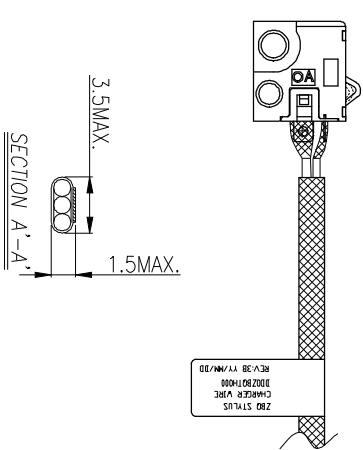


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	ECN NO.:S202209-R18	Jie	2022.12.14
C	ECN NO.:S202303-C19	Jie	2023.3.23
D	ECN NO.:S202312-C23/D	Springwu	2024.04.24

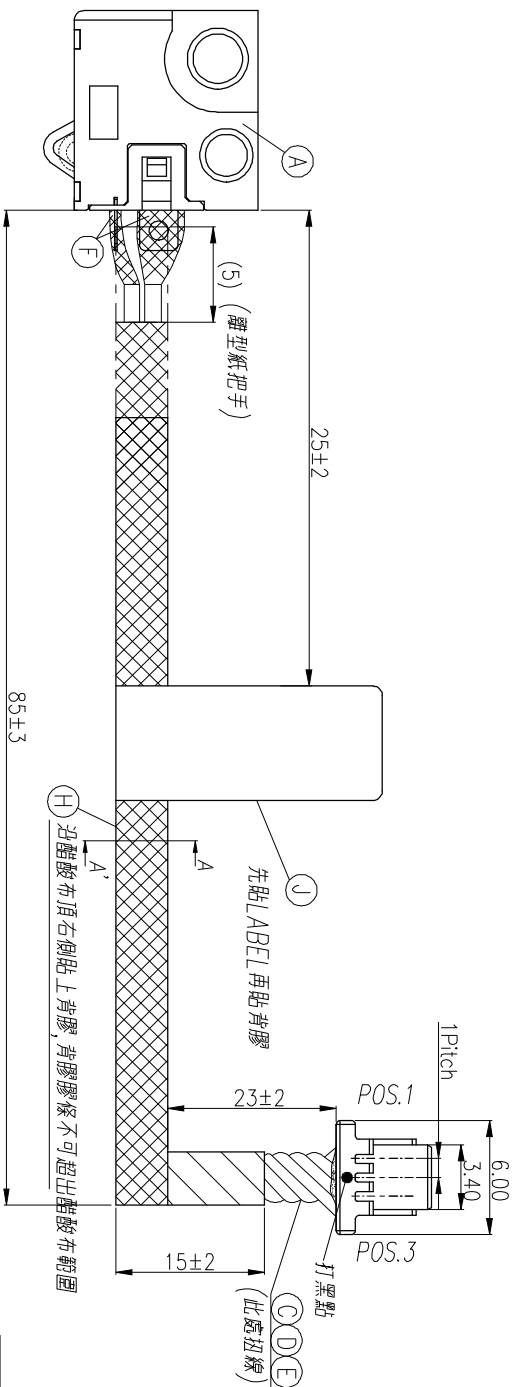

WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS.1	BLACK (UL10064 28AWG)	SPRING 1
POS.2	RED (UL10064 28AWG)	SPRING 2
POS.3	YELLOW (UL10064 28AWG)	TERMINAL

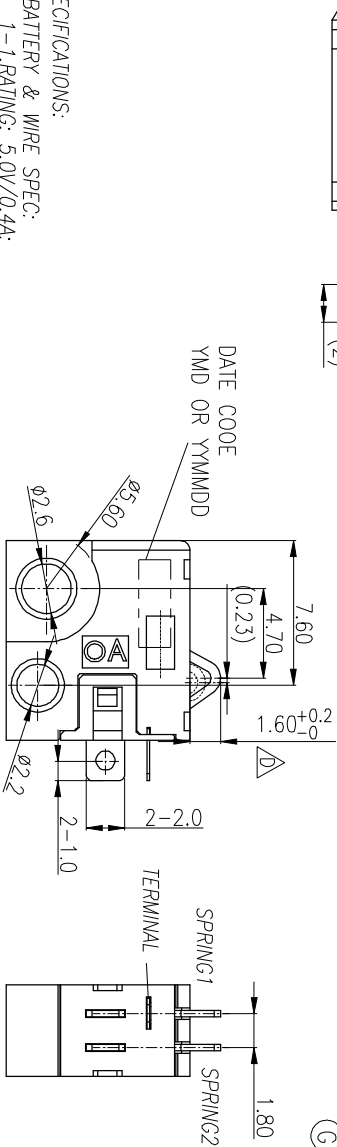

SPECIFICATIONS:

1. BATTERY & WIRE SPEC:

1-1.RATING: 5.0V/0.4A;

1-2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.

1-3.CONTACT RESISTANCE:50mΩ MAX.

1-4.NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)

1-5.LIFT TEST:5000 CYCLES MIN.

2. OTHER GENERAL SPEC. TO REFER "2BW3071-017111F SPEC."

3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.


4. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:

5. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:

6. PRINTED DATE CODE" YYMMDD" OR "YMD" ON TOP OF CONNECTOR.

DATE CODE: YYMMDD(Y:YEAR MM:MONTH DD:DAY)

YMD (Y:YEAR M:MONTH D:DAY)

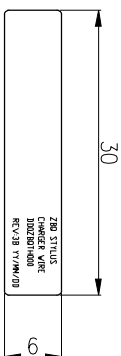

LABEL
SCALE 1:2

J	LABEL	1	L30*W6	WHITE
I	UV	/	/	/
H	背膠	1	TO.13 3M 55236	BLUE
G	ACETATE CLOTH	1	TO.12	BLACK
F	HEAT SHRINK TUBE	3	φ1.6合膠	BLACK
E	WIRE	1	UL10064#28AWG(W-1/105.30V)	YELLOW
D	WIRE	1	UL10064#28AWG(W-1/105.30V)	BLACK
C	WIRE	1	UL10064#28AWG(W-1/105.30V)	RED
B	WIRE TO BOARD CONN. (ACES_50233-003)	3	PHOSPHOR BRONZE	GOLD FLASH
A	BATTERY	1	NY10N66 UL94V-0	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE	STYLUS CHARGER WIRE	PART NO.	2BW3071-017111F	
DMW	Springwu	PART NO.	2BW3071-017111F	
CHKD	Boye	SCALE: --	UNIT: mm	
APVD	Luo	SIZE: A3	SHEET:1 OF 1	REV:D
CUSTOMER COPY				