
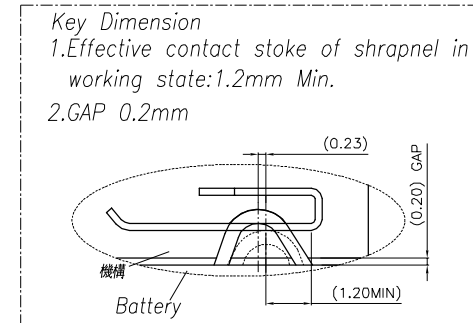





REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: T210819-4A	Sugar	2022.5.24

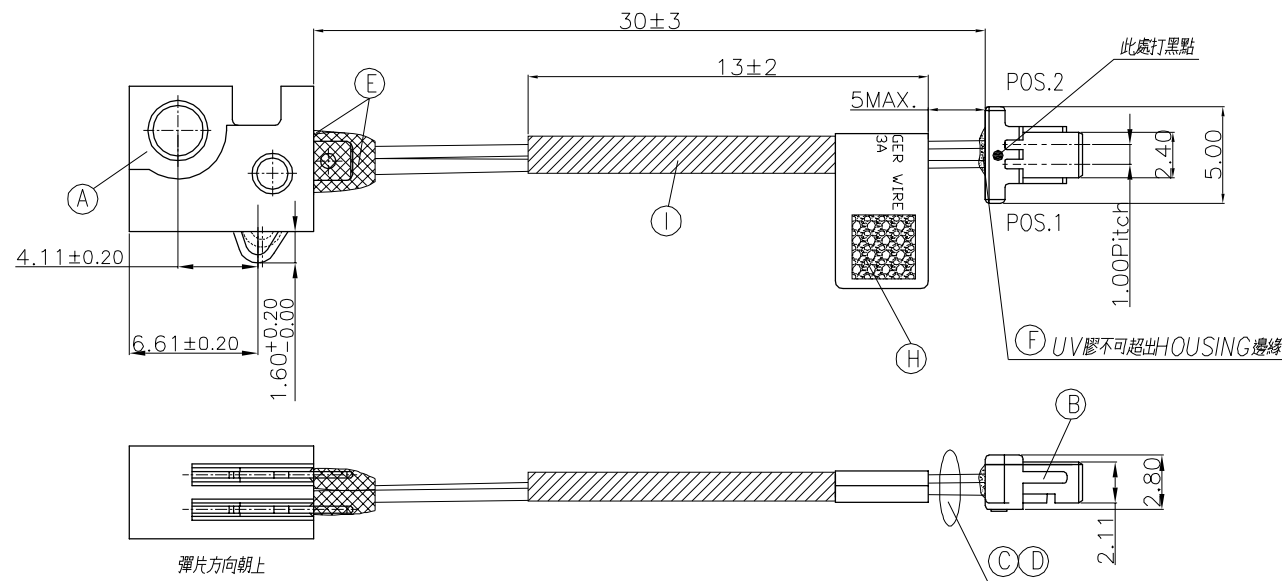

WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS.2	RED (UL10064 28AWG)	SPRING 2
POS.1	BLACK (UL10064 28AWG)	SPRING 1

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 3.3V 1A.
 - 1-2. CONTACT RESISTANCE: 50 mΩ MAX.
 - 1-3. INSULATION RESISTANCE: 100 MΩ MIN.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC MIN FOR ONE MINUTE.
- MECHANICAL PERFORMANCES:
 - 2-1. NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)
 - 2-2. MECHANICAL OPERATION: 10000 CYCLES.
- OTHER GENERAL SPEC. TO REFER "2BW3071-018111F SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
- HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
- PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.
DATE CODE: YYMMDD (YY:YEAR MM:MONTH DD:DAY)

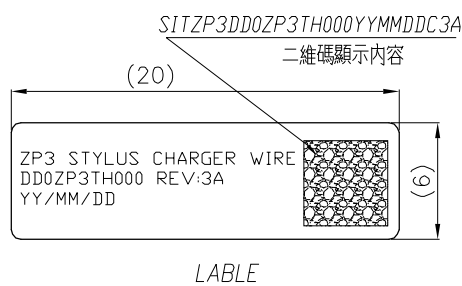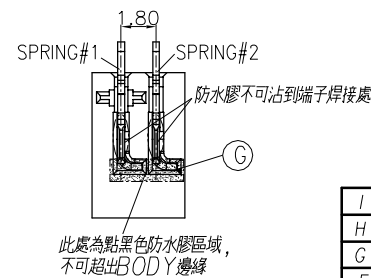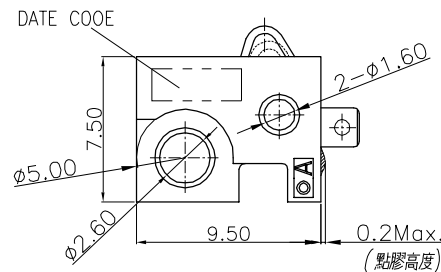

I	HEAT SHRINK TUBE	1	φ1.0(125',300V)	BLACK
H	LABEL	1	L20*W6	WHITE
G	JA723(A:B=4:1)	/	/	BLACK
F	UV GLUE	1	UV GLUE	WHITE
E	HEAT SHRINK TUBE	2	φ1.6(125',600V冷膠)	BLACK
D	WIRE	1	UL10064#28AWG	BLACK
C	WIRE	1	UL10064#28AWG	RED
B	WIRE TO BOARD CONN. (ACES_50233-002)	2	PHOSPHOR BRONZE	GOLD FLASH
		1	NYLON66 UL94V-0	WHITE
A	STYLUS CHARGER	1	SINGATRON STYLUS CHARGER P/N:2BA3071-002111F	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS: ANGLES:		TITLE	STYLUS CHARGER WIRE	
X :±0.5	X :±2°	DWN	Sugar	PART NO. 2BW3071-018111F
X.X :±0.3	X.X :±1°	CHKD	Lussen	SCALE: -- UNIT: mm 
X.XX :±0.2		APVD	Liao	SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY				