

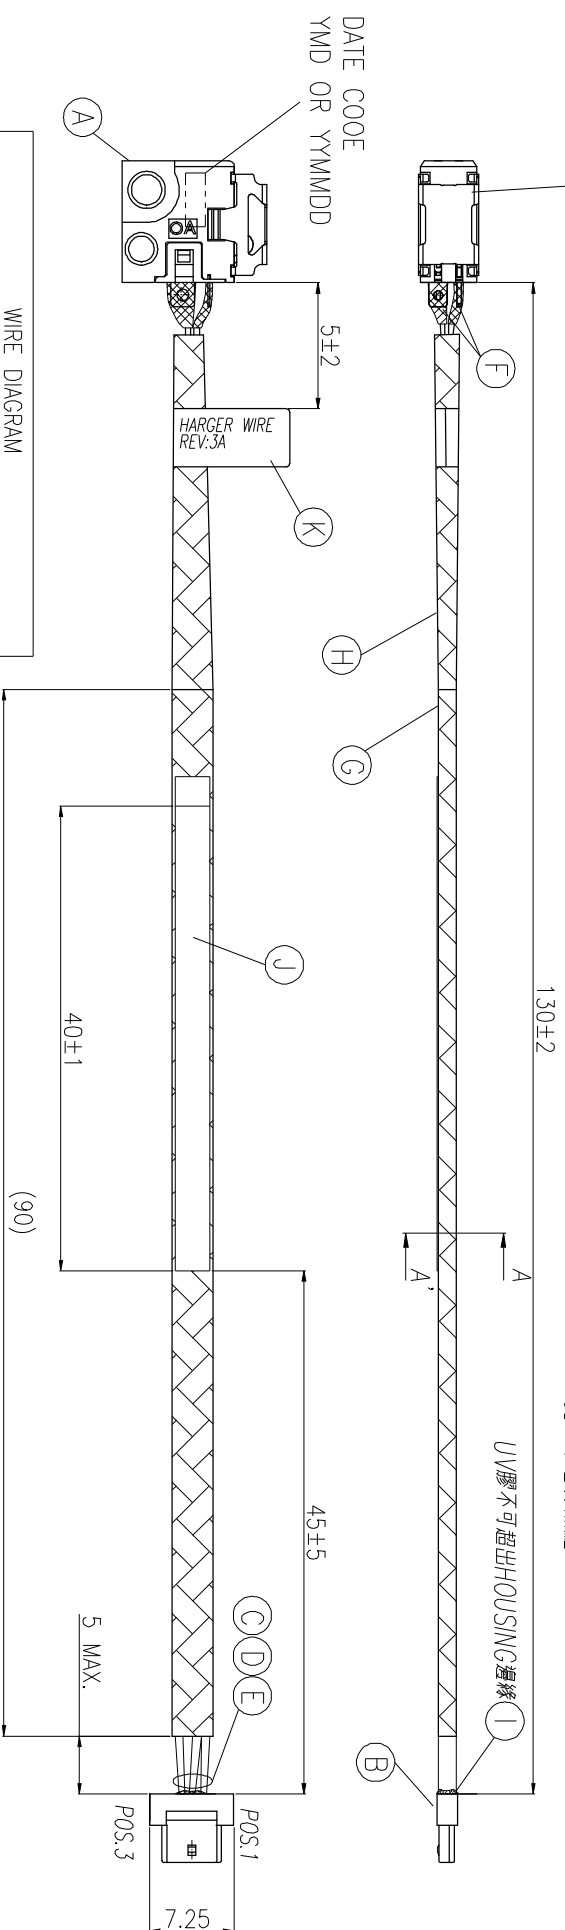


LABEL



WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS. 1	BLACK (UL10064 28AWG)	SPRING 1
POS. 2	YELLOW (UL10064 28AWG)	TERMINAL
POS. 3	RED (UL10064 28AWG)	SPRING 2

SECTION A'-A'




K	LABEL	1	125*W5	WHITE
J	ADHESIVE TAPE	1	T0.12	BLUE
I	UV GLUE	/	/	/
H	ACETATE TAPE	1	T0.12	BLACK
G	ACETATE TAPE	1	T0.12	BLACK
F	HEAT SHRINK TUBE	3	φ1.6合膠	BLACK
E	UNDER	4	1.5mm厚	BLACK

- | | | | | |
|---|------------------|---|--------|-------|
| K | LABEL | 1 | 125*W5 | WHITE |
| J | ADHESIVE TAPE | 1 | T0.12 | BLUE |
| I | UV GLUE | / | / | / |
| H | ACETATE TAPE | 1 | T0.12 | BLACK |
| G | ACETATE TAPE | 1 | T0.12 | BLACK |
| F | HEAT SHRINK TUBE | 3 | φ1.6合膠 | BLACK |
| E | UNDER | 4 | 1.5mm厚 | BLACK |

SPECIFICATIONS:
1. BATTERY AND WIRE SPEC:

- 1-1.RATING: 5.0V/0.5A;
1-2.INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE;
1-4.CONTACT RESISTANCE:50mΩ MAX.(ONLY FOR BATTERY)
1-5.NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)
1-6.LIFT TEST:5000 CYCLES MIN.
2. OTHER GENERAL SPEC. TO REFER "ZBW3071-023111F SPEC".
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: 
5. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
6. PRINTED DATE CODE"Y*MMDD" OR "YMD" ON TOP OF CONNECTOR.
DATE CODE: Y*MMDD (Y*:YEAR MM:MONTH DD:DAY)
YMD (Y*:YEAR M:MONTH D:DAY)

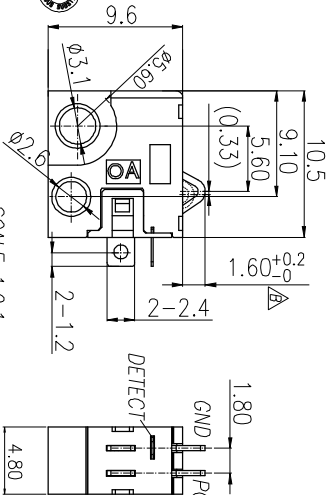

UNLESS OTHERWISE SPECIFIED TOLERANCES	 Singapore Enterprise Co., Ltd. 信晉企業股份有限公司	
NO	DESCRIPTION	QTY
A	BATTERY	1
TO SEE SINGAPORE BATTERY P/N:28A3071-013111F		
MATERIAL		PLATING & COLOR
C	WIRE	1
UL10064#28AWG(W-1/105.30V)		BLACK
B	WIRE TO BOARD CONN. (ACCS-50285-003)	3
PHOSPHOR BRONZE		RED
G/F 0.5u		
WHITE		
DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	DWN
X.X : ±0.3	X.X : ±1°	CHMD
X.XX : ±0.2		Boye
		Lioo
		APVD
STYLUS CHARGER WIRE		
PART NO. 2BW3071-023111F		
SCALE: --		UNIT: mm
SIZE: A3		SHEET: 1 OF 1
REV: B		