
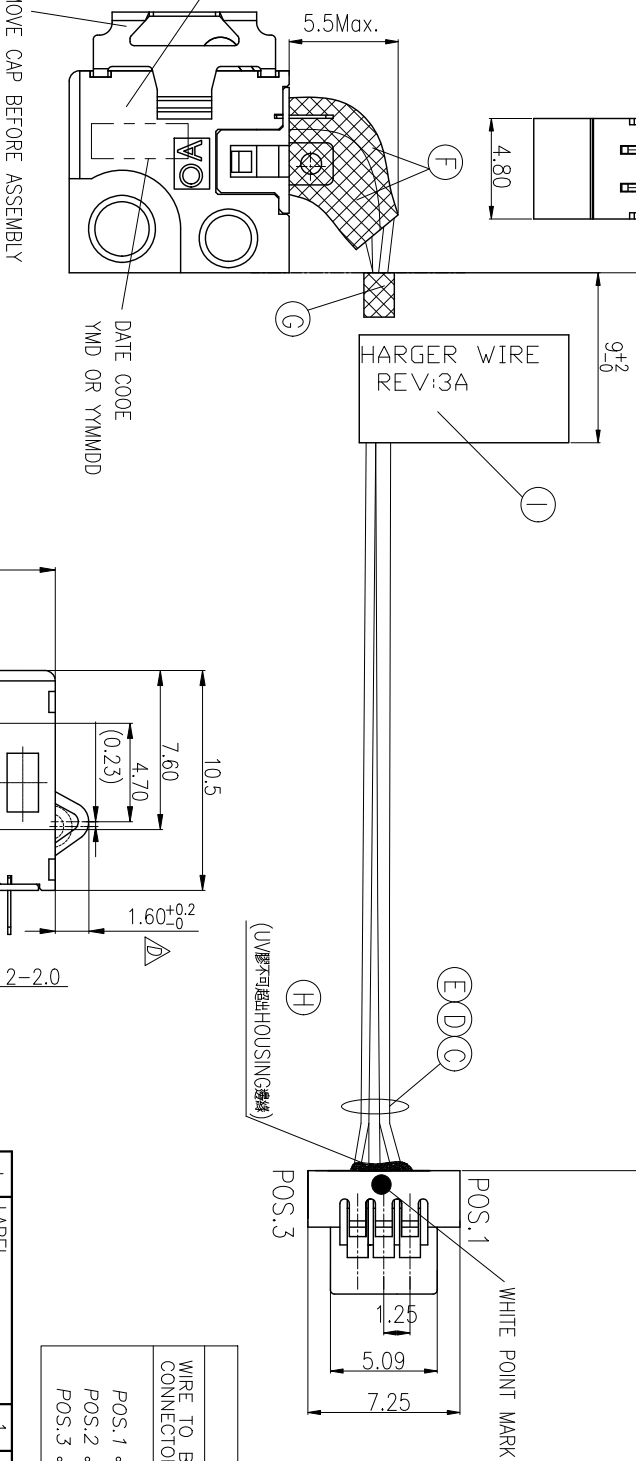


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
B	ECN NO.S202302-E07		Huachu	2023.04.21
C	ECN NO.S202307-C05		Yizhou	2023.10.18
D	ECN NO.S202312-C19		Springwu	2024.04.24

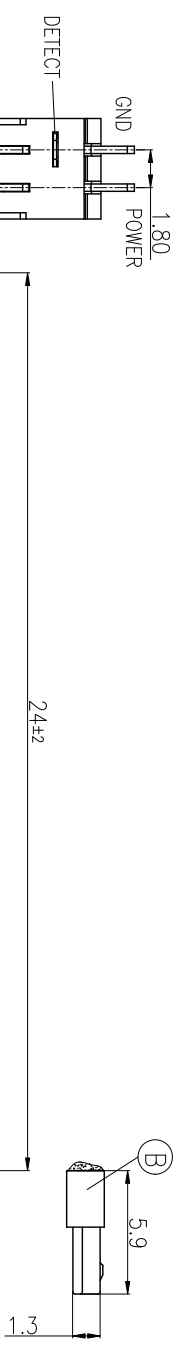

WIRE DIAGRAM		
WIRE TO BOARD CONNECTOR	WIRE	BATTERY
POS.1	RED (UL10064 28AWG)	POWER
POS.2	BROWN (UL10064 28AWG)	DETECT
POS.3	BLACK (UL10064 28AWG)	GND

- SPECIFICATIONS:
- BATTERY AND WIRE SPEC:
 - 1-1.RATING:3.3V OR 5.0V/0.4A;
 - 1-2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
 - 1-3.CONTACT RESISTANCE:50mΩ MAX.(ONLY FOR BATTERY)
 - 1-4.NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.65mm)
 - 1-5.LIFT TEST:5000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "2BW3071-025111F SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
 - HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
 - PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.

ZBP STYLUS CHARGER WIRE
DD0ZBPTH000 REV:3A
YY/MM/DD

DATE CODE:YYMMDD (YY:YEAR MM:MONTH DD:DAY)

I	LABEL	1	L20*W6	WHITE
H	UV	/	/	/
G	HEAT SHRINK TUBE	1	φ1.5(125.300V) VW-1	BLACK
F	HEAT SHRINK TUBE	3	φ1.6含膠	BLACK
E	WIRE	1	UL10064#28AWG (VW-1/105.30V)	BROWN
D	WIRE	1	UL10064#28AWG (VW-1/105.30V)	BLACK
C	WIRE	1	UL10064#28AWG (VW-1/105.30V)	RED
B	WIRE TO BOARD CONN.	3	PHOSPHOR BRONZE	G/F 0.5u
A	STYLUS CHARGER	1	NTLON66 UL94V-0	BLACK
TO SEE SINGATRON STYLUS CHARGER P/N2BA3071-013111F				
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: STYLUS CHARGER WIRE				
DWN	Springwu	PART NO.	2BW3071-025111F	
CHKD	Boye	SCALE:	—	UNIT: mm
APVD	Luo	SIZE: A3	SHEET: 1 OF 1	REV: D

LABEL

“0” 为数字; “□” 为字母

CUSTOMER COPY