



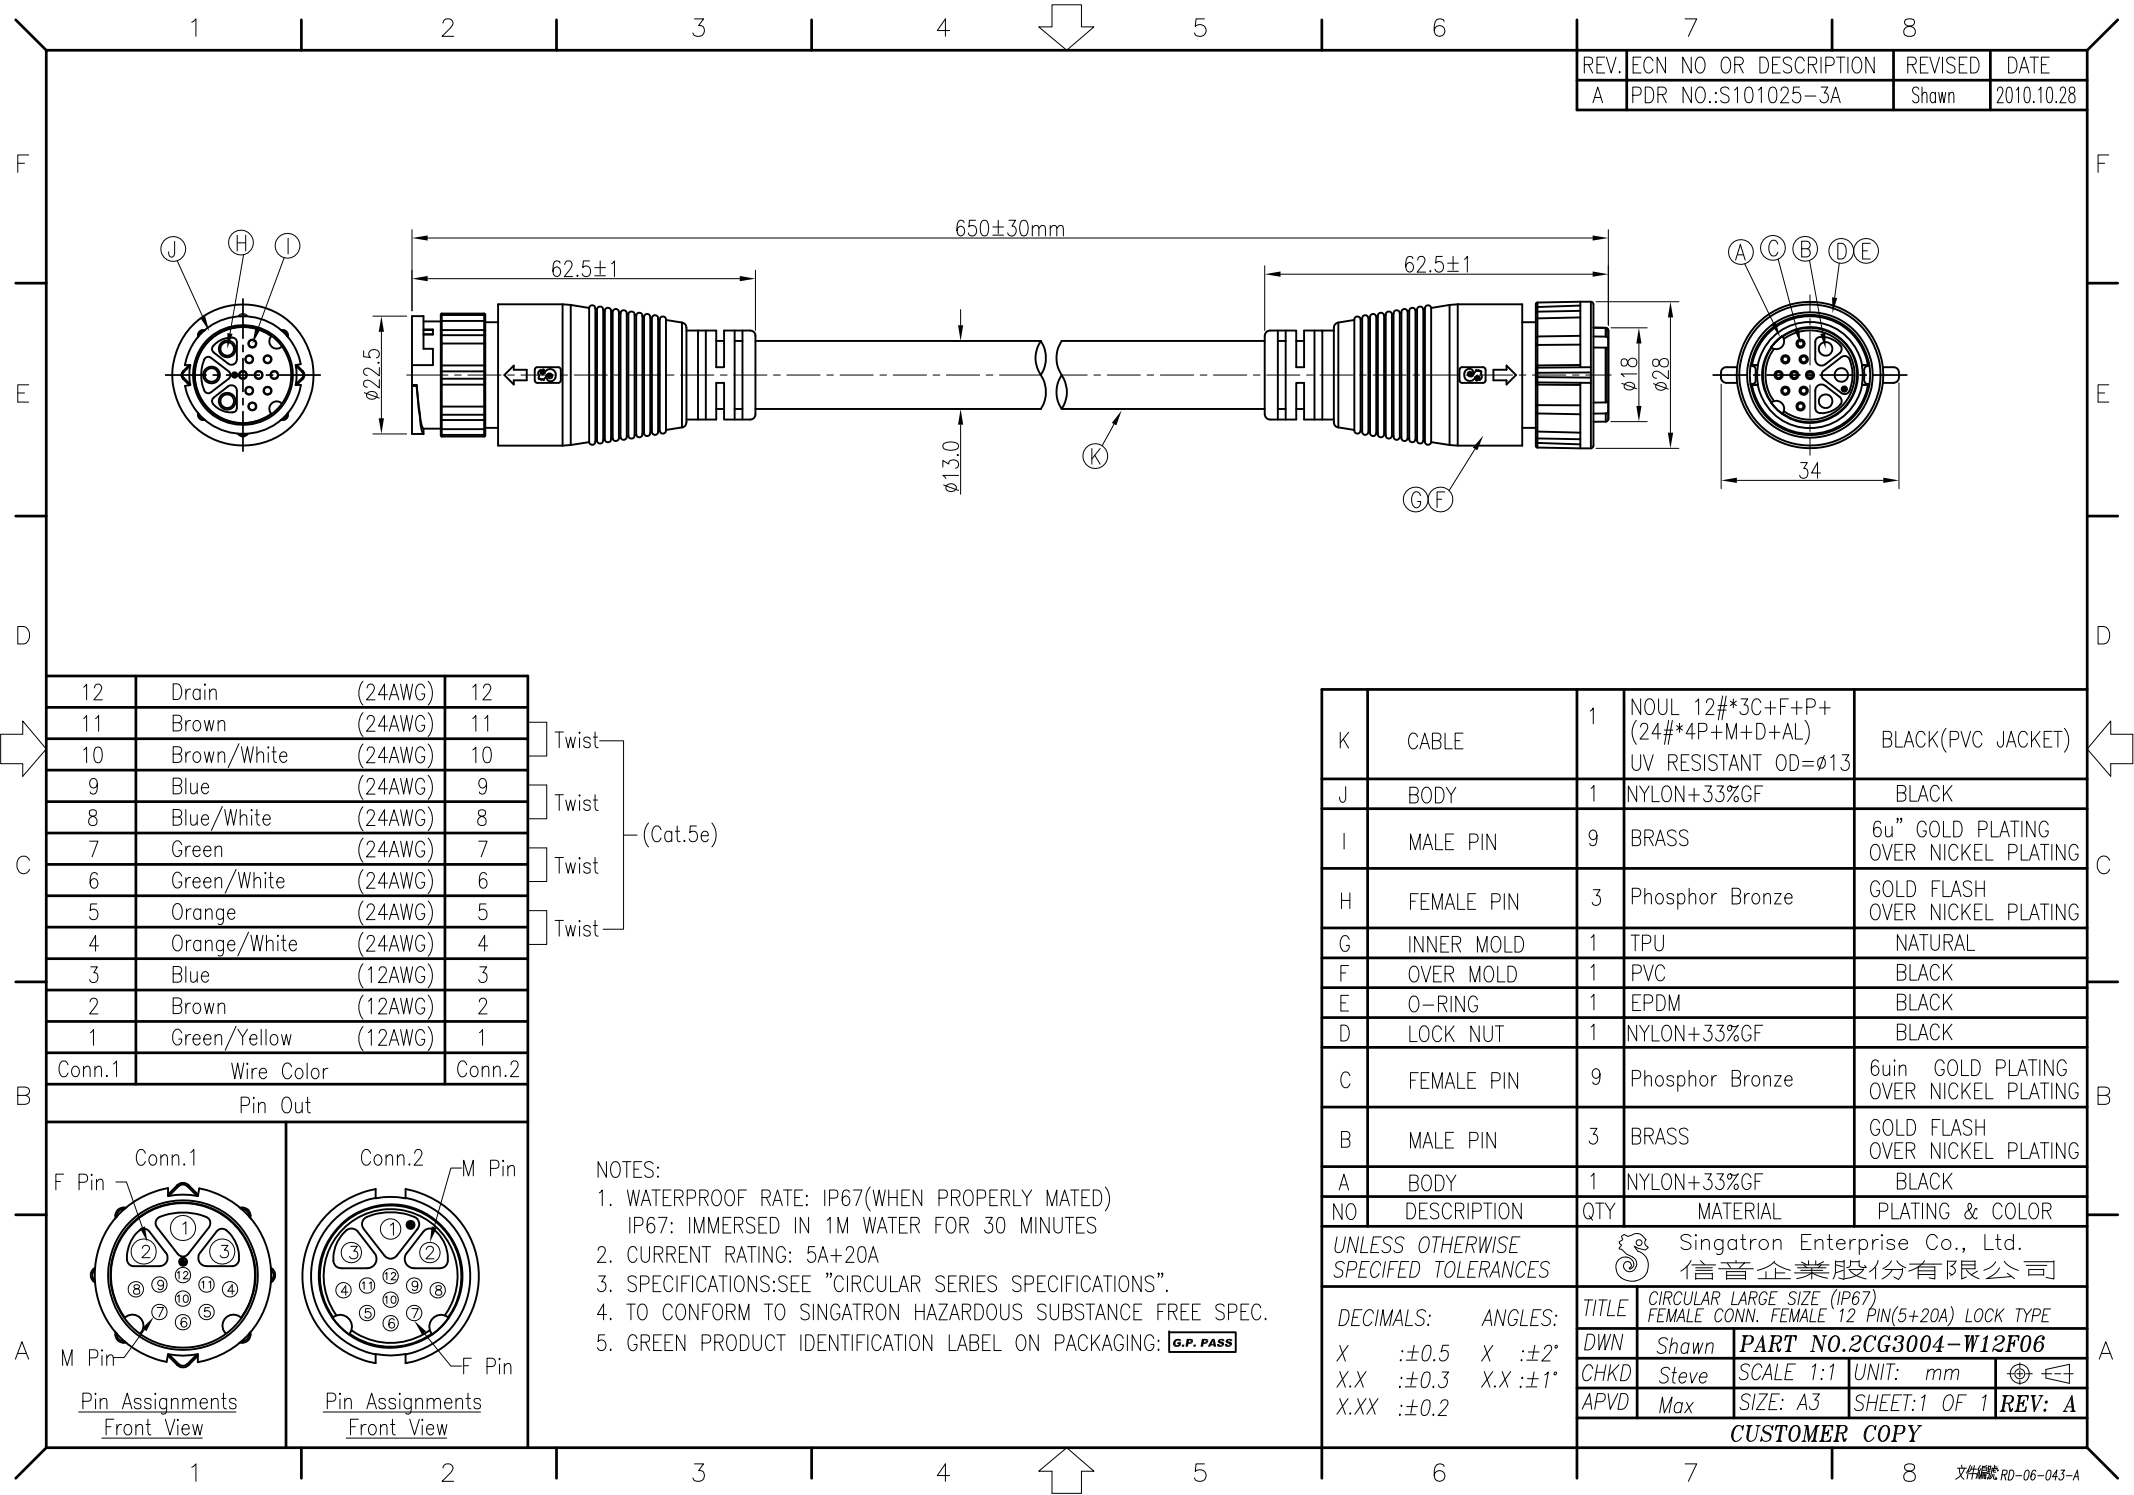

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S101025-3A	Shawn	2010.10.28

12	Drain	(24AWG)	12
11	Brown	(24AWG)	11
10	Brown/White	(24AWG)	10
9	Blue	(24AWG)	9
8	Blue/White	(24AWG)	8
7	Green	(24AWG)	7
6	Green/White	(24AWG)	6
5	Orange	(24AWG)	5
4	Orange/White	(24AWG)	4
3	Blue	(12AWG)	3
2	Brown	(12AWG)	2
1	Green/Yellow	(12AWG)	1
Conn.1	Wire Color		Conn.2

Twist
Twist
Twist
Twist
(Cat.5e)

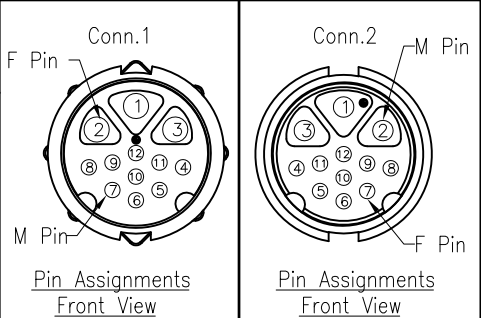

- NOTES:
1. WATERPROOF RATE: IP67(WHEN PROPERLY MATED)
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A+20A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

K	CABLE	1	NOUL 12#*3C+F+P+ (24#*4P+M+D+AL) UV RESISTANT OD=Ø13	BLACK(PVC JACKET)
J	BODY	1	NYLON+33%GF	BLACK
I	MALE PIN	9	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
H	FEMALE PIN	3	Phosphor Bronze	GOLD FLASH OVER NICKEL PLATING
G	INNER MOLD	1	TPU	NATURAL
F	OVER MOLD	1	PVC	BLACK
E	O-RING	1	EPDM	BLACK
D	LOCK NUT	1	NYLON+33%GF	BLACK
C	FEMALE PIN	9	Phosphor Bronze	6uin GOLD PLATING OVER NICKEL PLATING
B	MALE PIN	3	BRASS	GOLD FLASH OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS: ANGLES:		TITLE CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE 12 PIN(5+20A) LOCK TYPE	
X :±0.5	X :±2°	DWN Shawn	PART NO.2CG3004-W12F06
X.X :±0.3	X.X :±1°	CHKD Steve	SCALE 1:1 UNIT: mm 
X.XX :±0.2		APVD Max	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY			