




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140509-5B	JF	2017.02.28

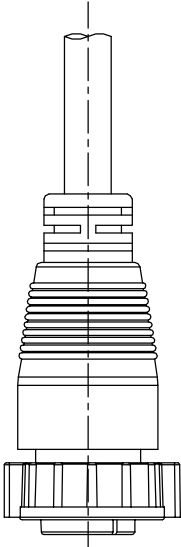


CONN.

WATERPROOF RATE: IP67

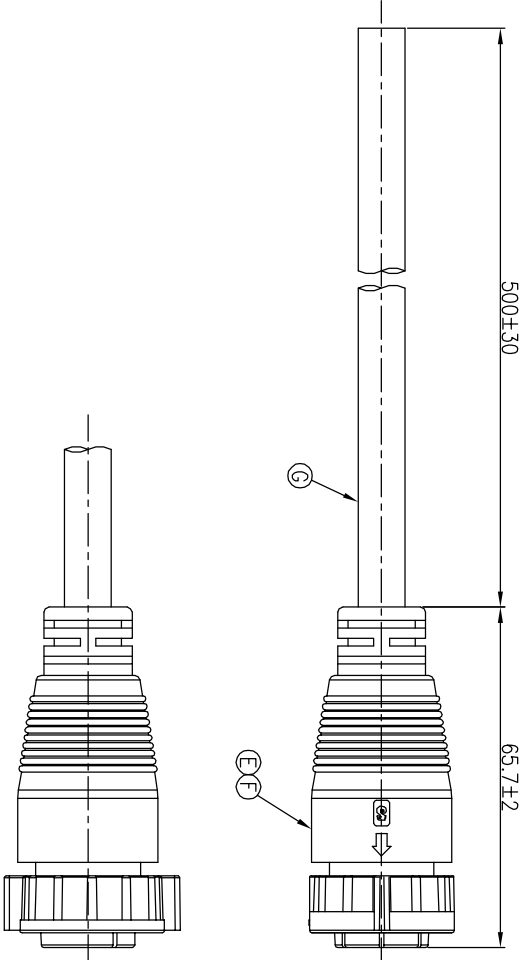

RED/WHITE 26#	17
BROWN/WHITE 26#	16
BLACK/WHITE 26#	15
LIGHT GREEN 26#	14
PINK 26#	13
WHITE 26#	12
GRAY 26#	11
PURPLE 26#	10
BLUE 26#	9
GREEN 26#	8
YELLOW 26#	7
ORANGE 26#	6
RED 26#	5
BROWN 26#	4
BLACK 26#	3
BLACK 14#	2
RED 14#	1
Wire Color	Conn.
Pin Out	

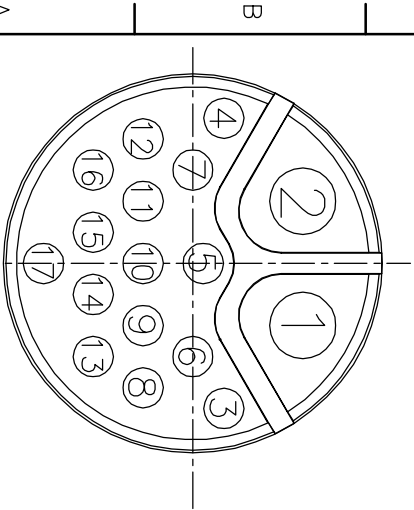

Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
2. CURRENT RATING:2+20A
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	CABLE	1	UL2464 26#*15C+AL 14#*2C UV	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	17	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD. 信昌企業股份有限公司				
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	DMN	JF	CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE (20+2)A (2+15)PIN LOCK TYPE
XX :±0.3	XX :±1°	CHKD	Yang	PART NO.2CG3004-W17B01H
XXX :±0.2		APVD	Harlen	SCALE 1:1 UNIT: mm
SIZE: A3 SHEET:1 OF 1 REV: A				
CUSTOMER COPY				