



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO:C100331-1A		Horlen	2010.06.03
B	ECN NO:S120407		Horlen	2012.4.2

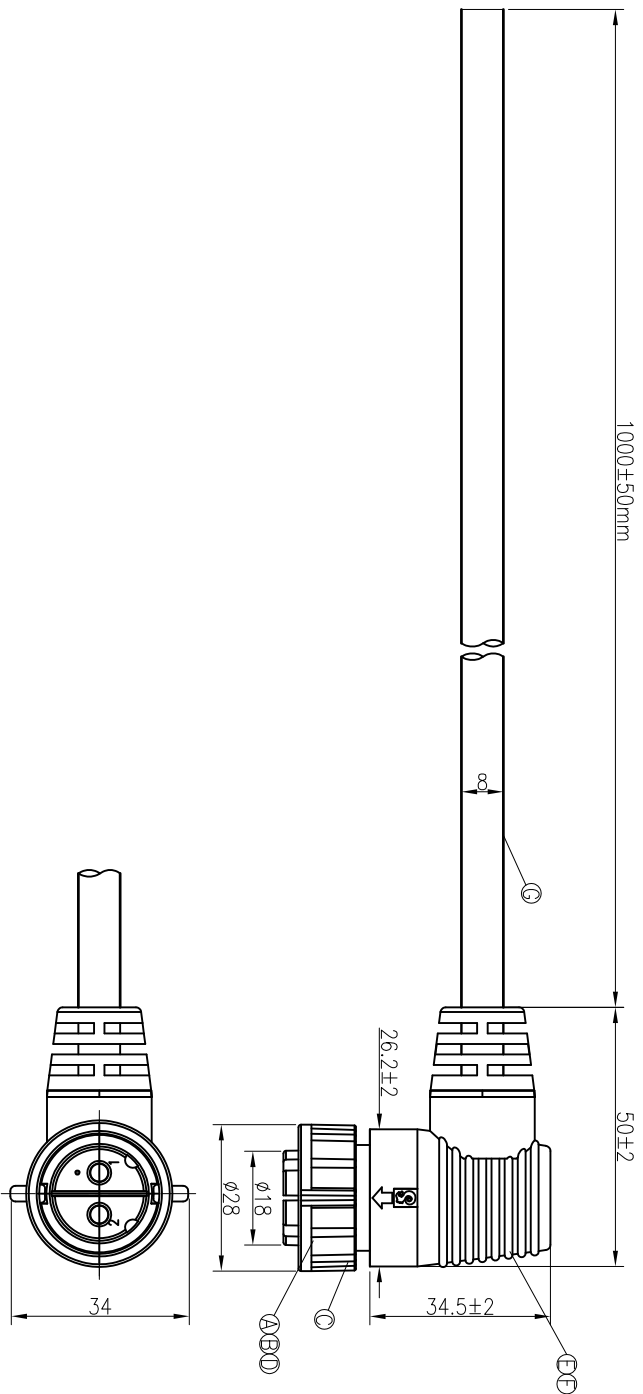

BLACK	2
RED	1
Wire Color	Conn.
B	Pin Out



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67(WHEN PROPERLY MATED)
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 40A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GP PASS**

G	CABLE	1	UL2464 14AWG*2C+T OD8.0 (UV)	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	2	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:		Singapore Enterprise Co., Ltd. 信音企業股份有限公司		
TITLE CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE 2 PIN(40A) LOCK TYPE				
X :±0.5	X :±2°	DWN	Horlen	PART NO.2CG3010-W02G00
X.X :±0.3	X.X :±1°	CHKD	STEVE	SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	TONY	SIZE: A3 SHEET:1 OF 1
REV: B				
CUSTOMER COPY				

CUSTOMER COPY