



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:S100824-1A		Harden	2010.08.25



2-200±20


200±20

65.6±2




LABEL

CONN.3





透明膠包裹




CONN.2

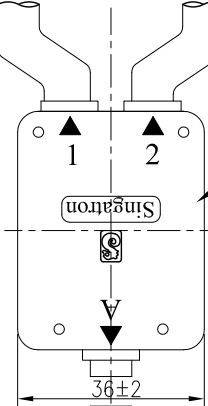

CONN.1

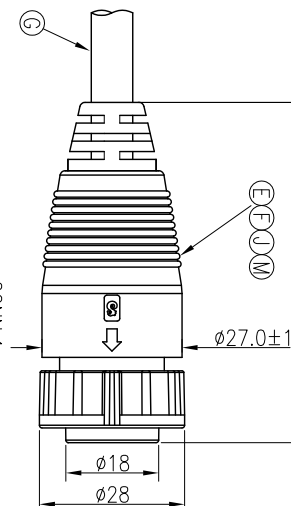


CONN.2

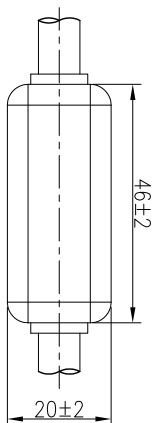

LightGreen	12	12	12	12
Black	11	11	11	11
Pink	10	10	10	10
White	9	9	9	9
Gray	8	8	8	8
Purple	7	/	1	7
Blue	6	6	6	6
Green	5	5	5	5
Yellow	4	4	4	4
Orange	3	3	3	3
Red	2+Drain	2+Drain	2+Drain	2+Drain
Brown	1	1	/	1
Wire Color	Conn.1	Conn.2	Conn.3	P
	Pin Out			B

CONN.2/3	CONN.1
Pin Assignments	Pin Assignments



NOTES:

1. WATERPROOF RATE: IP67
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **6P PASS**

M	SHRINK TUBE	34	Ø2.0 600V L:8	BLACK
L	UV 膠	36		N/A
K	LABEL	2	PET L50.8 W12.7	WHITE
J	SHRINK TUBE	6	Ø2.0 600V L:15	BLACK
I	PCB	1	FR-4	GREEN
H	MALE PIN	12	HB159-1.5B	1~3u" GOLD PLATING OVER NICKEL PLATING
G	CABLE	3	UL2464 22#*12C+AL +D+B UV 008.0	BLACK(PVC JACKET)
F	INNER MOLD	4	TPU	NATURAL
E	OVER MOLD	4	PVC	BLACK
D	O-RING	3	EPDM	BLACK
C	LOCK NUT	3	NYLON+GF	BLACK
B	FEMALE PIN	24	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	3	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信晉企業股份有限公司

CIRCULAR LARGE SIZE 10 MIDDLE SIZE (IP67)
FEMALE CONN. 12 PIN(5A) LOCK TYPE

DECIMALS: ANGLES: TITLE
X :±0.5 X :±2° DWN Harden 2010.09.28 PART NO.2CG3016-W12303

X.X :±0.3 X.X :±1° CHKD Steve 2010.09.28 SCALE 1:1 UNIT: mm

X.XX :±0.2 APVD Max. 2010.09.28 SIZE: A3 SHEET:1 OF 1 REV:A

CUSTOMER COPY