



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140509-5C	JF	2017.02.28

F	RED/WHITE 26#	17
	BROWN/WHITE 26#	16
	BLACK/WHITE 26#	15
	LIGHT GREEN 26#	14
	PINK 26#	13
E	WHITE 26#	12
	GRAY 26#	11
	PURPLE 26#	10
	BLUE 26#	9
	GREEN 26#	8
D	YELLOW 26#	7
	ORANGE 26#	6
	RED 26#	5
	BROWN 26#	4
	BLACK 26#	3
C	BLACK 14#	2
	RED 14#	1
Wire Color		Conn.
Pin Out		

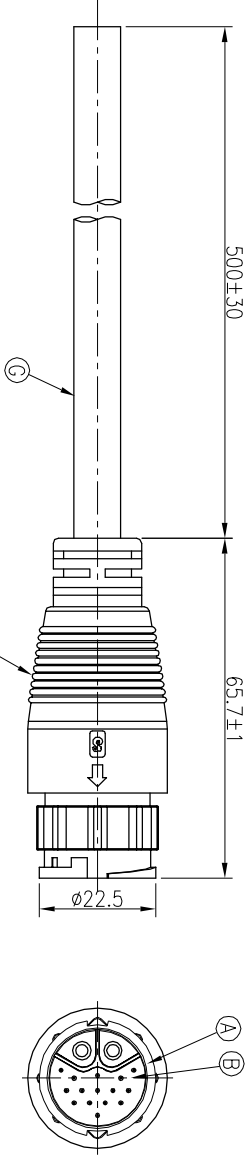

Pin Out

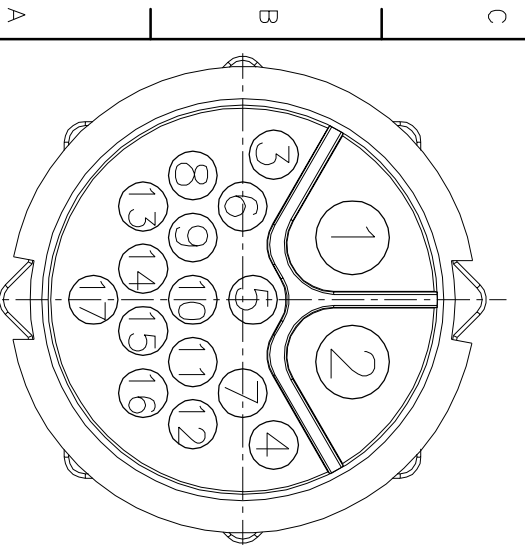

Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
2. CURRENT RATING:2+20A
3. TO CONFORM TO SINGAITRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	CABLE	1	UL2464 26#*15C +14#*2C+AL UV	BLACK(PVC JACKET)
E	HEAR SHRINK TUBE	15	$\phi 1.5$ 300V 125°	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	PVC	BLACK
B	MALE PIN	17	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信昌企業股份有限公司				
DECIMALS: ANGLES: TITLE CIRCULAR LARGE SIZE				
X : ± 0.5	X : $\pm 2^\circ$	DMN	JF	PART NO.2CG3024-W17E01H
XX : ± 0.3	XX : $\pm 1^\circ$	CHKD	Yang	SCALE 1:1 UNIT: mm
XXX : ± 0.2		APVD	Horien	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				

1

2

3

4

5

6

7

8