


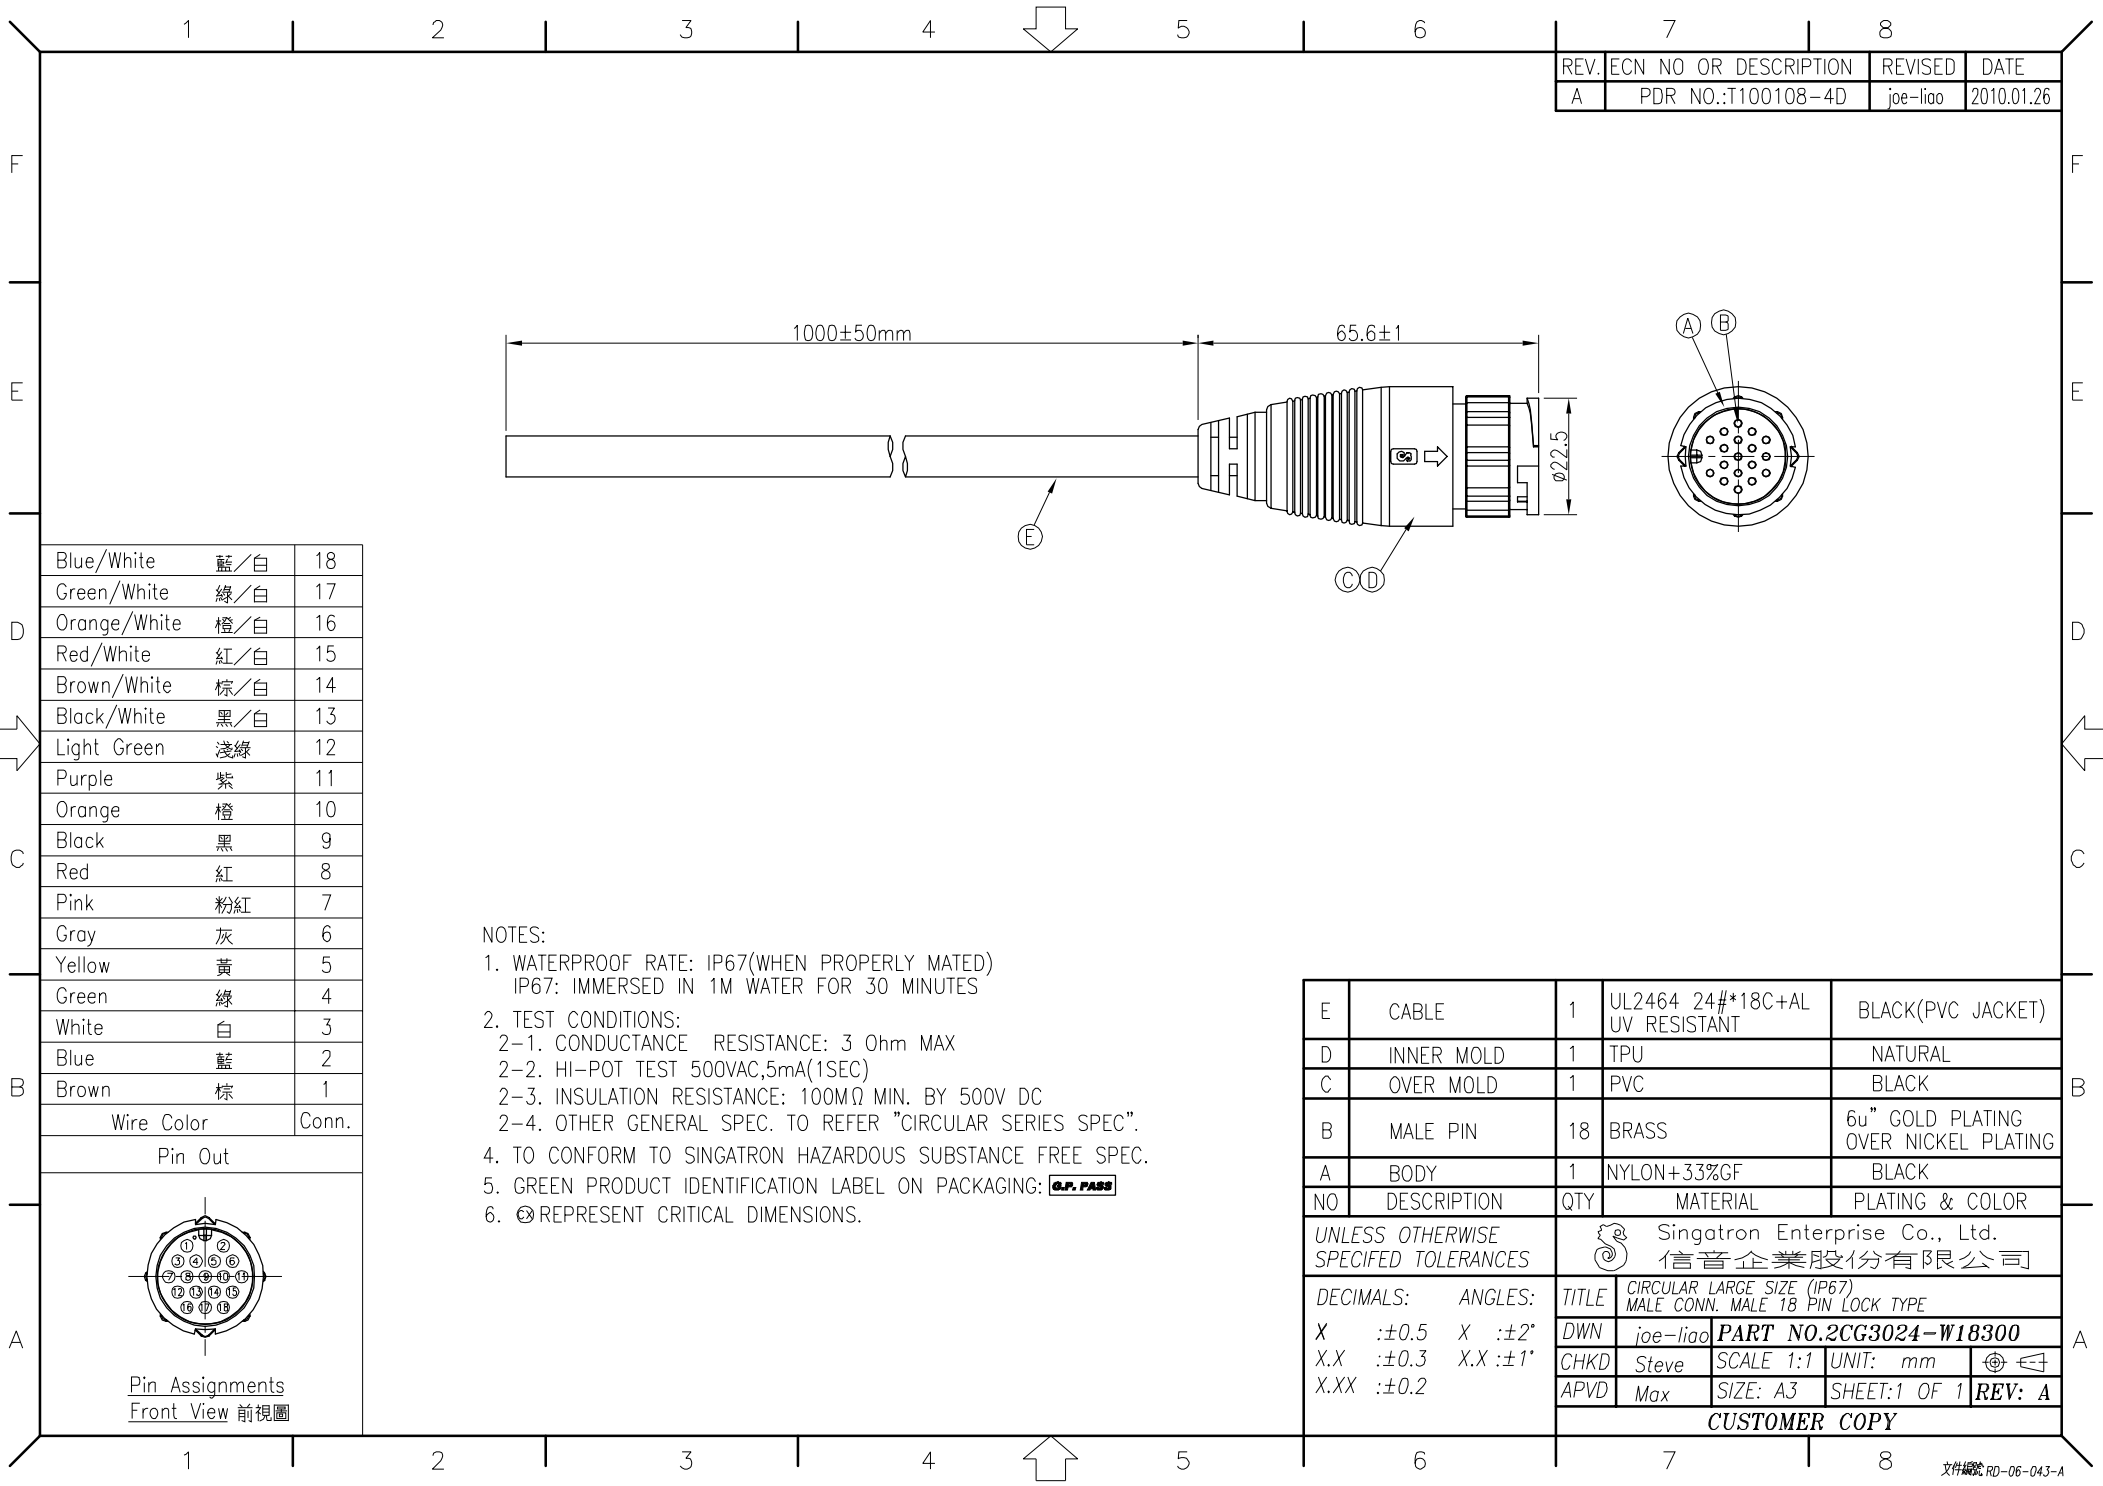

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T100108-4D	joe-liao	2010.01.26

Blue/White	藍/白	18
Green/White	綠/白	17
Orange/White	橙/白	16
Red/White	紅/白	15
Brown/White	棕/白	14
Black/White	黑/白	13
Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		
Pin Assignments Front View 前視圖		

- NOTES:
- WATERPROOF RATE: IP67(WHEN PROPERLY MATED)
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 - TEST CONDITIONS:
2-1. CONDUCTANCE RESISTANCE: 3 Ohm MAX
2-2. HI-POT TEST 500VAC,5mA(1SEC)
2-3. INSULATION RESISTANCE: 100MΩ MIN. BY 500V DC
2-4. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 - ⊗ REPRESENT CRITICAL DIMENSIONS.

E	CABLE	1	UL2464 24#*18C+AL UV RESISTANT	BLACK(PVC JACKET)
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	PVC	BLACK
B	MALE PIN	18	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%CF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信晉企業股份有限公司	
DECIMALS:		ANGLES:	TITLE CIRCULAR LARGE SIZE (IP67) MALE CONN. MALE 18 PIN LOCK TYPE	
X	:±0.5	X	:±2°	DWN joe-liao PART NO.2CG3024-W18300
X.X	:±0.3	X.X	:±1°	CHKD Steve SCALE 1:1 UNIT: mm
X.XX	:±0.2			APVD Max SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				