

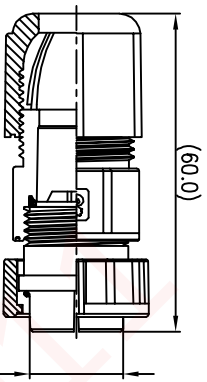








REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150526-4C	JF	2015.11.13



PULL FORCE 35kgf Max.

TORQUE FORCE: 1.0~1.2N.m

P/N:2CG3032-W02600H

P/N:2CG3033-W02600H

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 20A
 3. SEAL FOR CABLE OD:φ6.0mm~φ12.0mm
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

1	LIQUID GLUE	1	N/A	BLACK
H	O-RING	1	EPDM	BLACK
G	BODY	1	PA66+30%GF	BLACK
F	FEMALE PIN	2	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
E	LOCK NUT	1	PC 9330	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC 9330	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC 9330	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD.				
TITLE: CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE 2 PIN (20A) LOCK TYPE				
DECIMALS:	ANGLES:	DWN	JF	PART NO.2CG3032-W02600H
X :±0.5	X :±2°	CHKD	Yang	SCALE 2:1 UNIT: mm
XX :±0.3	XX :±1°	APVD	Horlen	SIZE: A3 SHEET:1 OF 1 REV: A
XXX :±0.2				

CUSTOMER COPY