


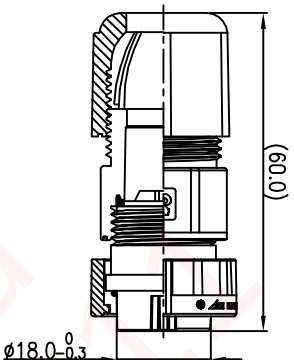









REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150306-6E	JF	2015.12.17



PULL FORCE 35kgf Max.

TORQUE FORCE: 1.0~1.2N.m

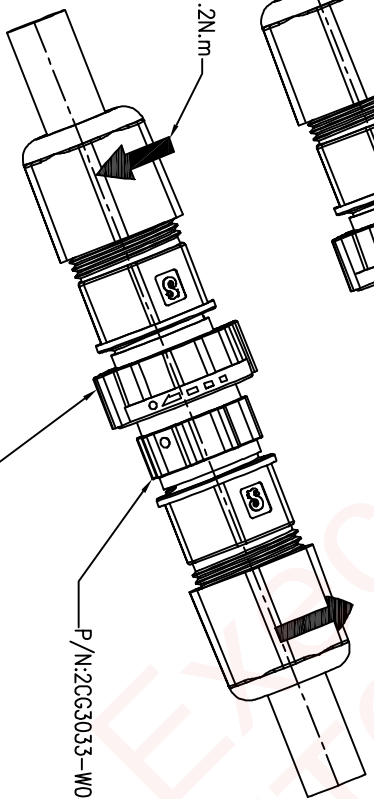

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 20A
3. SEAL FOR CABLE OD:φ6.0mm~φ12.0mm
4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
1	LIQUID GLUE	1	N/A	BLACK
H	O-RING	1	EPDM	BLACK
G	BODY	1	PA66+30%GF	BLACK
F	FEMALE PIN	3	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
E	LOCK NUT	1	PC 9330	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC 9330	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC 9330	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES: TITLE LARGE SIZE (IP67) CIRCULAR FEMALE CONN. FEMALE 3 PIN (20A) LOCK TYPE				
X	:±0.5	X	:±2°	DMN JF PART NO.2CG3032-W03603H
XX	:±0.3	XX	:±1°	CHKD Yang SCALE 2:1 UNIT: mm
XXX	:±0.2	XXX		APVD Harlen SIZE: A3 SHEET:1 OF 1 REV: A

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

CUSTOMER COPY