








REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S120705-6A	Shown	2013.08.05
B	ECN NO.:S151202-C	JF	2015.12.14



DCC(SZ)

胡為南

2015/12/18
16:28:07

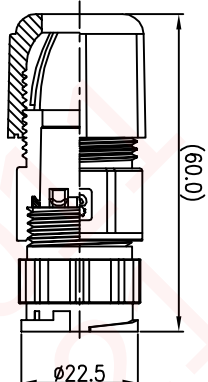

PULL FORCE 35kgf Max.

TORQUE FORCE: 1.0~1.2N.m

P/N:2CG3033-W03600H
P/N:2CG3032-W03600H

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 20A
 3. SEAL FOR CABLE OD:φ6.0mm~φ12.0mm
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	LIQUID GLUE	1	N/A	BLACK
F	BODY	1	PA66+30%GF 94V-0	BLACK
E	MALE PIN	3	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC 9330	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC 9330	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS: ANGLES:				
X	±0.5	X	±2°	TITLE CIRCULAR LARGE SIZE (IP67)
XX	±0.3	XX	±1°	MALE CONN. MALE 3 PIN (20A) LOCK TYPE
XXX	±0.2			DWN JF PART NO.2CG3033-W03600H
				CHKD Yang SCALE 2:1 UNIT: mm
				APVD Harlen SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY