






REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150306-6F	JF	2015.12.17




胡為南



2015/12/22

08:55:56

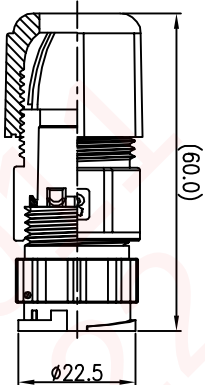

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 20A
3. SEAL FOR CABLE OD:ø6.0mm~ø12.0mm
4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

PULL FORCE 35kgf Max.

TORQUE FORCE: 1.0~1.2N.m

P/N:2CG3032-W03603H

P/N:2CG3033-W03601H

G	LIQUID GLUE	1	N/A	BLACK
F	BODY	1	PA66+30%GF 94V-0	BLACK
E	MALE PIN	3	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC 9330	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC 9330	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
XX	:±0.3	XX	:±1°	
XXX	:±0.2			
TITLE: CIRCULAR LARGE SIZE (IP67) MALE CONN. MALE 3 PIN (20A) LOCK TYPE				
DMN	JF	PART NO.	2CG3033-W03601H	
CHKD	Yang	SCALE	2:1	UNIT: mm
APVD	Harlen	SIZE: A3	SHEET: 1 OF 1	REV: A

CUSTOMER COPY