
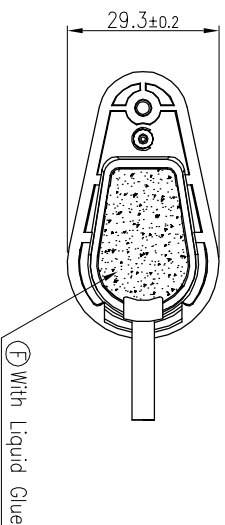
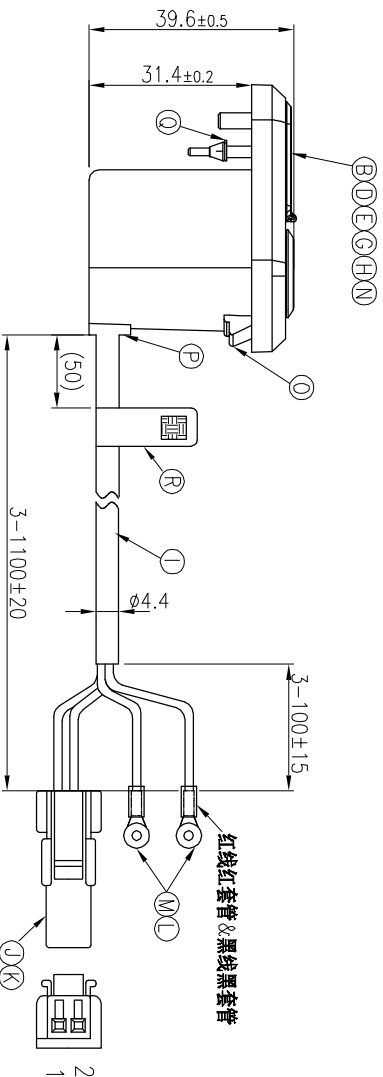


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:1200406-12A	RZ		2022.07.27

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - INPUT VOLTAGE: 17V±1V
 - OUTPUT VOLTAGE: 5V~5.25V
 - MAXIMUM INPUT CURRENT: 2A
 - MAXIMUM OUTPUT CURRENT: 1.0~1.1A
 - TYPE-C DATA~DATA-之间阻值为 200±10Ω
- WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
- USB TYPE C LIFE TEST: 10000 CYCLES
- POWER BUTTON LIFE TEST: 10000 CYCLES
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE:5~20N
 - WITHDRAWAL FORCE:8N~20N(INITIAL);6~20N(AFTER LIFE TEST)
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR. PASS**

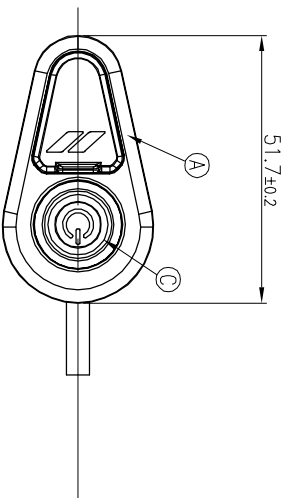

二维码扫描内容:
2CH3001-W05201H
YYMMDDXXXX
产品料号
流水号 (从0001开始)
年
月
日

CONN1	WIRE	-
PCBA +	UL1007 RED +	POWER 1
PCBA -	UL1007 BLACK -	POWER 2
POWER 3	UL2464 BLUE +	CONN2 PIN1
POWER 4	UL2464 YELLOW-	CONN2 PIN2
PCBA +	UL2464 RED +	RING TERMINAL
PCBA -	UL2464 BLACK -	RING TERMINAL

R	LABEL	1	PET 80°C	NA
Q	物料	1	SUS420	NI PLATING
P	SR	1	PVC	BLACK
O	CAP	1	EPDM SHORE A 70°	BLACK
N	SCREW	1	SUS304 M3*L10	BLACK SN PLATING
M	RING TERMINAL	2	COPPER KST:DRNB4-0.5	TIN PLATING
L	SHRINK TUBE	2	ø2.0 300V 125°C	NA
K	TERMINAL	2	HongRu 120032PS-2	TIN PLATING
J	HOUSING	1	HongFu M20032-1	WHITE
I	CABLE	1	UL2464 24AWG*4C+AL (UV RESISTANT)	BLACK
H	WIRE	1	UL1007 26AWG	RED
G	WIRE	1	UL1007 26AWG	BLACK
F	GLUE	1	JA723A/B894GLUE	BLACK
E	PCBA	1	N/A	N/A
D	USB TYPE C	1	2UB2Y80-C00111F	N/A
C	POWER BUTTON	1	FT160-C30	SILVER
B	Rubber 盖	1	EPDM SHORE A 70°	BLACK
A	BODY	1	EXLPC9330 UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Suzhou Singtong Auto Electronics CO.,LTD. 苏州信音汽车电子有限公司		
DECIMALS: ANGLES:		TITLE POWER BUTTON+USB TYPE C		
X : ±0.5	X : ±2°	DMN	RZ	PART NO.2CH3001-W05201H
X.X : ±0.3	X.X : ±1°	CHKD	Jun	SCALE 1:1 UNIT: mm
X.XX : ±0.2		APVD	JF	SIZE: A4 SHEET:1 OF 1 REV: A
CUSTOMER COPY				