
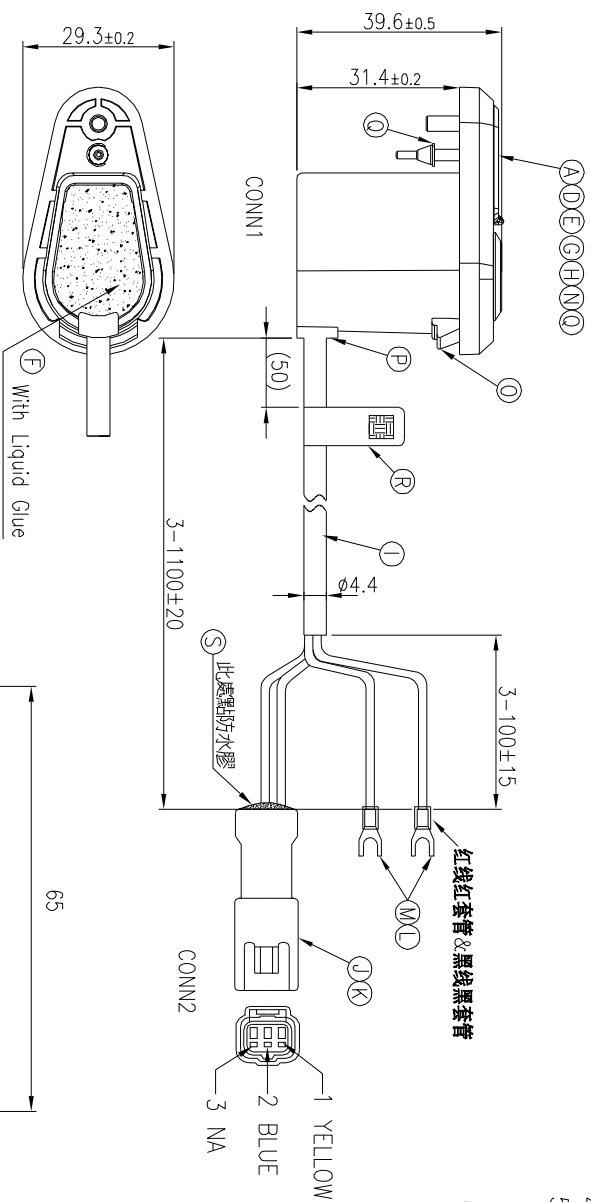


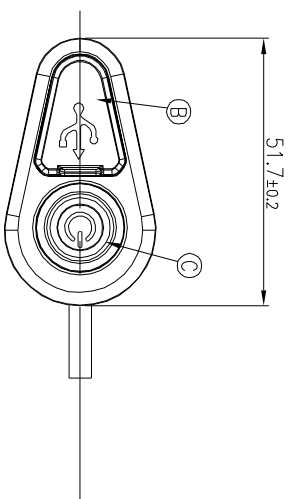

B		CONN1	WIRE	-
	PCBA LED+	UL1007	RED +	POWER 1
	PCBA LED-	UL1007	BLACK -	POWER 2
	POWER 4	UL2464	YELLOW+	CONN2 PIN1
	POWER 3	UL2464	BLUE -	CONN2 PIN2
A	NA	NA		CONN2 PIN3
	PCBA B+	UL2464	RED +	TERMINAL2
	PCBA B-	UL2464	BLACK -	TERMINAL2

13

10

2CH3001-W05202H

YYMMDD

XXXX

二维码扫描内容:

2CH3001-W05202H

产品料号

流水号 (从0001开始)

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. INPUT VOLTAGE: 1V $\pm$ 1V
- 1-2. OUTPUT VOLTAGE: 5V $\sim$ 5.25V
- 1-3. MAXIMUM INPUT CURRENT: 2A
- 1-4. MAXIMUM OUTPUT CURRENT: 1.0 $\sim$ 1.1A
- 1-5. TYPE-C DATA+~DATA-之间阻值为 200 $\pm$ 10 Ω
2. WATERPROOF RATE: IP67
- IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
3. USB TYPE C LIFE TEST: 10000 CYCLES
4. POWER BUTTON LIFE TEST: 10000 CYCLES
5. MECHANICAL CHARACTERISTICS:
 - 5-1. INSERTION FORCE: 5 $\sim$ 20N
 - 5-2. WITHDRAWAL FORCE: 8N $\sim$ 20N (INITIAL); 6 $\sim$ 20N (AFTER LIFE TEST)
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: OK, PASS

S	GLUE	1	TB1220	NATURA
R	LABEL	1	PET 80°C	SILVER
Q	E扣	1	SUS420	NI PLATING
P	SR	1	PVC	BLACK
O	CAP	1	EPDM SHORE A 70°	BLACK
N	SCREW	1	SUS304 M3*1.10	BLACK SN PLATING
M	TERMINAL2	2	JST:0.5-3A	TIN PLATING
L	SHRINK TUBE	2	300V 125°C	NA
K	TERMINAL1	2	JST:SWPT-0011-P025	NICKEL
J	HOUSING	1	JST:03T-JWPF-VSLE-S	WHITE
I	CABLE	1	UL2464 24AWG*4C+AL (UV RESISTANT)	BLACK
H	WIRE	1	UL1007 26AWG	RED
G	WIRE	1	UL1007 26AWG	BLACK
F	GLUE	1	JA723A/B&94GLUE	BLACK
E	PCBA	1	N/A	N/A
D	USB TYPE C	1	2UB2Y80-C00111F	N/A
C	POWER BUTTON	1	FT160-C30	BLACK
B	Rubber 蓋	1	EPDM SHORE A 70°	BLACK
A	BODY	1	EXLPC9330 UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音普汽車電子有限公司				
DECIMALS:	ANGLES:	TITLE	POWER BUTTON+USB TYPE C	
X :±0.5	X :±2°	DWN	RZ	PART NO.2CH3001-W05202H
X.X :±0.3	X.X :±1°	CHXD	UF	SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	UF	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				