
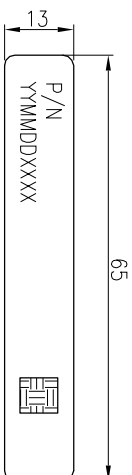
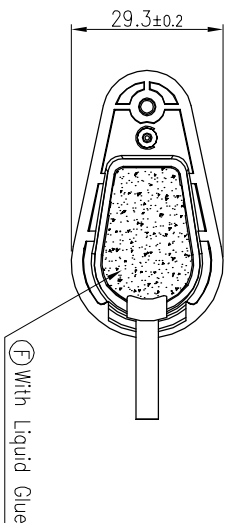
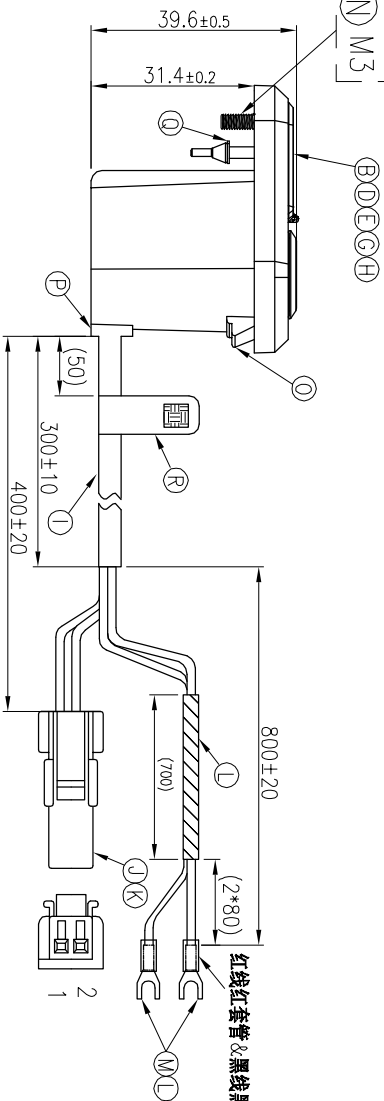


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO:1211122-3A		RZ	2023.03.01

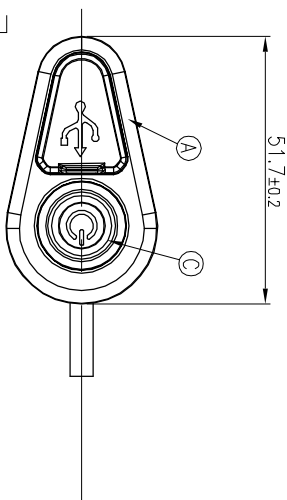

二维码扫描内容:
2CEI3001-W05205H
YMMDDXXXX
产品料号
流水号 (从0001开始)
年
月
日

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - INPUT VOLTAGE: 17V±1V
 - OUTPUT VOLTAGE: 5V~5.25V
 - MAXIMUM INPUT CURRENT: 2A
 - MAXIMUM OUTPUT CURRENT: 1.0~1.1A
 - WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 - USB TYPE C LIFE TEST: 10000 CYCLES
 - POWER BUTTON LIFE TEST: 10000 CYCLES
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 5~20N
 - WITHDRAWAL FORCE: 8N~20N (INITIAL); 6~20N (AFTER LIFE TEST)
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **OK, PASS**

R	LABEL	1	PET 80°C	SILVER
Q	E 扣	1	SUS420	NI PLATING
P	SR	1	PVC	BLACK
O	CAP	1	EPDM SHORE A 70°	BLACK
N	SCREW	1	SUS304 M3*L10	BLACK SN PLATING
M	TERMINAL-2	2	JST 0.5-3A	TIN PLATING
L	SHRINK TUBE	3	300V 125°C	NA
K	TERMINAL-1	2	HongRu 120032PS-2	NICKEL
J	HOUSING	1	HongRu M20032-1	WHITE
I	CABLE	1	UL2464 24AWG*4C+AL (UV RESISTANT) Ø4.4	BLACK

H	WIRE	1	UL1007 26AWG	RED
G	WIRE	1	UL1007 26AWG	BLACK
F	GLUE	1	JA723A/B894GLUE	BLACK
E	PCBA	1	N/A	N/A
D	USB TYPE C	1	2UB2Y80-C00111F	N/A
C	POWER BUTTON	1	FT160-C30	SILVER
B	Rubber 蓋	1	EPDM SHORE A 70°	BLACK
A	BODY	1	EXLPC9330 UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Suzhou Singatron Auto Electronics CO.,LTD.
蘇州信音汽車電子有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	
TITLE POWER BUTTON+USB TYPE C	
DWN RZ	PART NO.2CH3001-W05205H
CHKD JF	SCALE 1:1 UNIT: mm
APVD JF	SIZE: A4 SHEET: 1 OF 1 REV: A

CUSTOMER COPY