
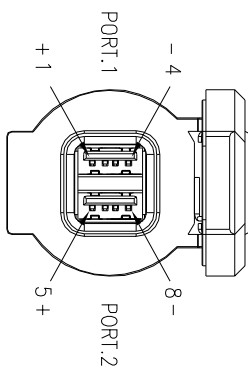

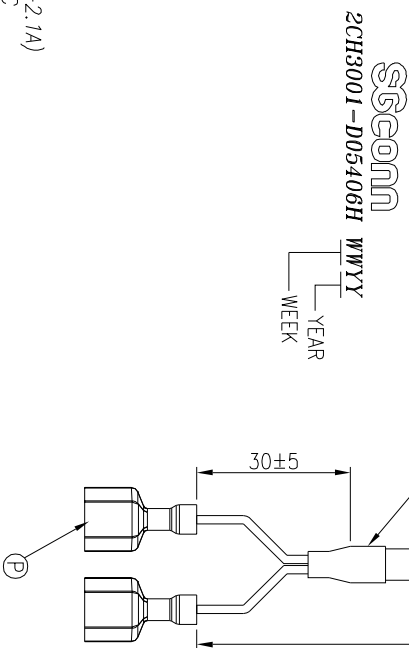
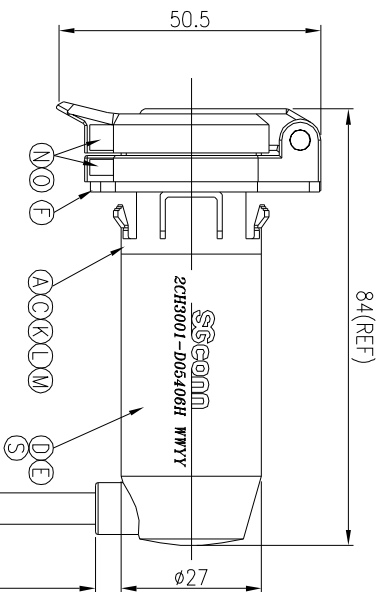


RoHS

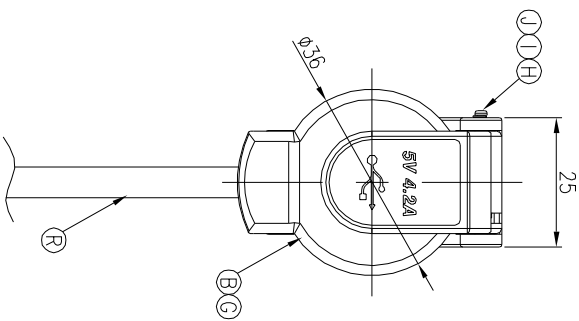

PANEL THICKNESS OF 2.5~3.0mm

CAP OPEN

S	TUBE	1	PC	BLACK
R	CABLE	1	2464 AWG 16AWG 2C UV OD:6.0mm BLACK	WIRE: RED & BLACK
Q	HEAT SHRINK TUBE	1	Ø 7.0 125° 300V	BLACK
P	TERMINAL	2	MDENY2-250A/TE 3-520106-2	BARREL: BLUE
O	STOPPER	2	PVC	BLACK
N	MAGNET	2	NdFeB	NICKEL
M	GLUE	1	N/A	BLACK
L	USB2.0	1	N/A	DUAL PORT
K	PCBA	1	FR-4	N/A
J	AXIS	1	SUS304	NATURAL
I	SPRING	1	SUS304	NATURAL
H	E-RING	1	SUS304	NATURAL
G	CAP GASKET	1	SILICONE	RED
F	GASKET	1	SILICONE	BLACK
E	OVER MOLD	1	TPU	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	COVER	1	ABS	NATURAL
B	CAP	1	PC	BLACK
A	BODY	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE WATERPROOF USB CAR CHARGER 12V 4.2A NORMALLY OPEN SPRING CAP				
DWN	Jun	PART NO.2CH3001-W05406H		
CHKD	JF	SCALE 1:1	UNIT: mm	REV: C
APVD	William	SIZE: A3	SHEET:1 OF 1	REV: C

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. INPUT VOLTAGE: 10V~16V

1-2. OUTPUT VOLTAGE: 4.55V~5.25V

1-3. MAXIMUM OUTPUT CURRENT: 4.2A(2.1A+2.1A)

1-4. OPERATING TEMPERATURE: -20°C~+50°C

2. LIFE TEST: 5,000 CYCLES.

3. RoHS COMPLIANT

4. NORMALLY OPEN SPRING CAP

5. This part is warranted under normal use, and service.

This Limited Warranty extends 25months beginning on E2Go build date.

1

2

3

4

5

6

7

8

文#RD-06-045-A