


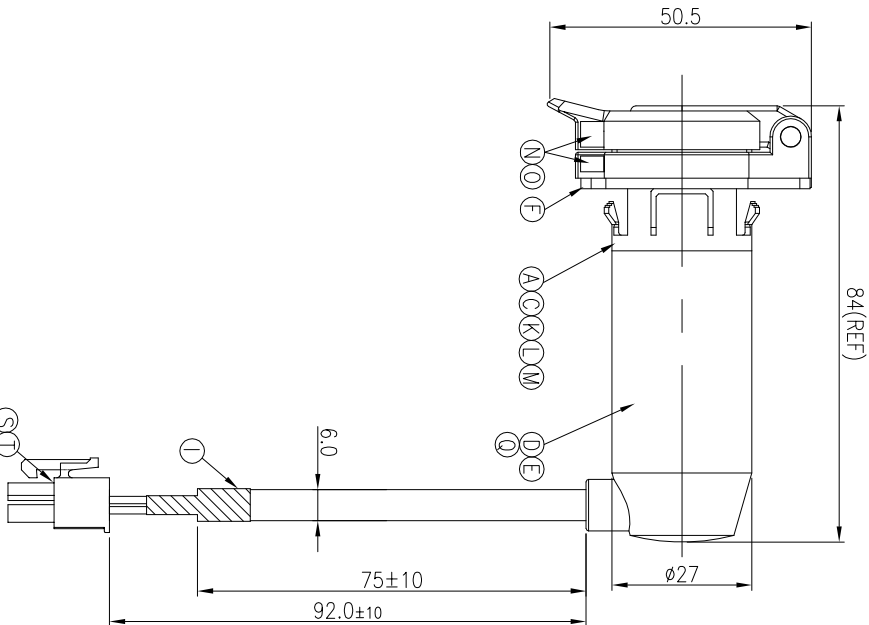


WATERPROOF RATE: IP67

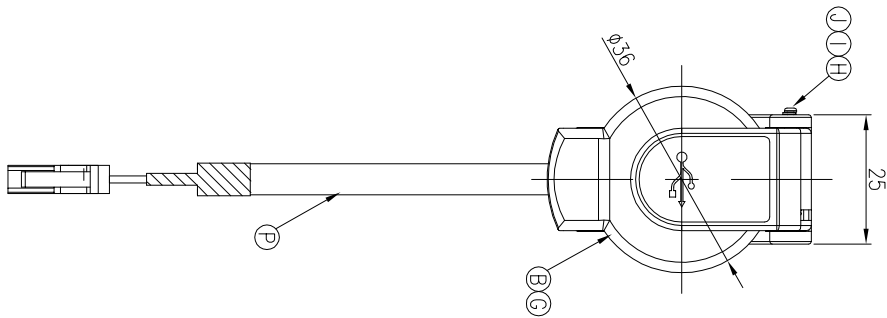

PANEL CUT-OUT
PANEL THICKNESS OF 2.5~3.0mm

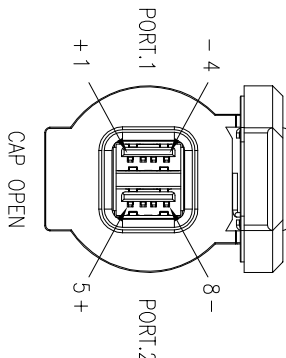

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - INPUT VOLTAGE: 9V~16V
 - OUTPUT VOLTAGE: 4.55V~5.25V
 - MAXIMUM OUTPUT CURRENT: 4.2A(2.1A+2.1A)
 - OPERATING TEMPERATURE: -20°C~+50°C
- LIFE TEST: 5,000 CYCLES.
- RoHS COMPLIANT
- NORMALLY CLOSED SPRING CAP

CONN.	WIRE	PORT 1	PORT 2
1	RED +	1	5
2	BLACK -	4	8

T	TERMINAL	2	MOX39000077	TIN PLATED
S	HOUSING	1	MOX39012020	NATURAL
I	TUBE	1	Ø7.0, 125°C, 300V, L=20	BLACK
Q	ROUND TUBE	1	PC	BLACK
P	CABLE	1	2464 AWG 16AWG 2C UV OD:6.0mm BLACK	4CM3004-W02604
O	STOPPER	2	PVC	BLACK
N	MAGNET	2	NdFeB	NICKEL
M	GLUE	1	N/A	WHITE
L	USB2.0	1	N/A	4UB3005-W0510J
K	PCBA	1	FR-4	N/A
J	AXIS	1	SUS	NATURAL
I	SPRING	1	SUS	NATURAL
H	E-RING	1	SUS	NATURAL
G	CAP GASKET	1	SILICONE	RED
F	GASKET	1	SILICONE	RED
E	OVER MOLD	1	TPU	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	COVER	1	ABS	NATURAL
B	CAP	1	PC	BLACK
A	BODY	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
 Suzhou Singtong Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司				
TITLE WATERPROOF USB CAR CHARGER 12V 4.2A NORMALLY CLOSED SPRING CAP				
DWN	JAY	PART NO.2CH3001-W05416H		
CHKD	Cerry	SCALE 1:1	UNIT: mm	
APVD	William	SIZE: A3	SHEET:1 OF 1	REV: A
CUSTOMER COPY				

CUSTOMER COPY

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.1200721-1A	JAY	2020.11.25