


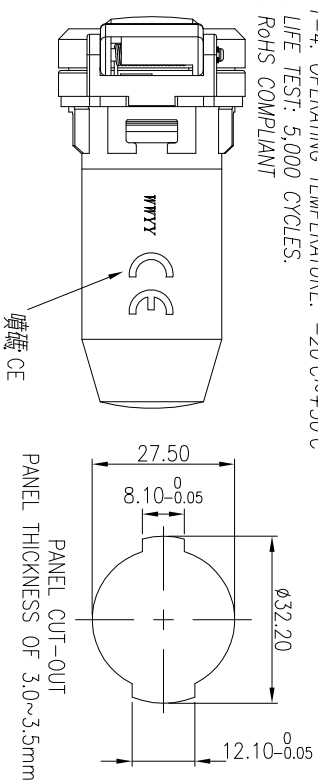
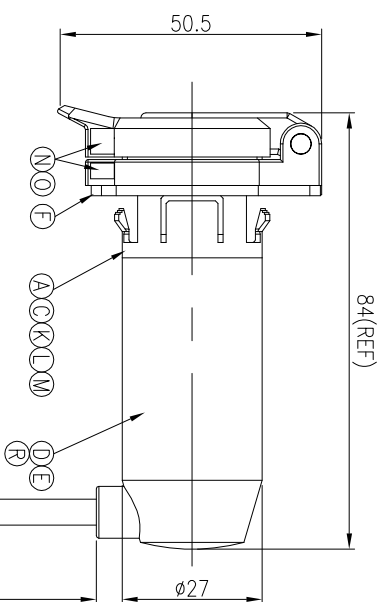


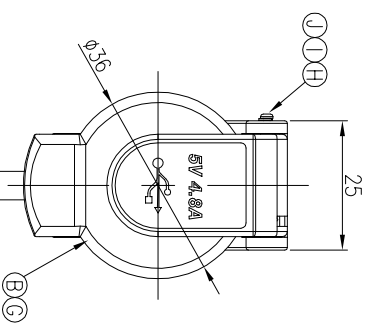

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. INPUT VOLTAGE: 10V~32V
 - 1-2. OUTPUT VOLTAGE: 4.55V~5.25V
 - 1-3. MAXIMUM OUTPUT CURRENT: 4.8A(2.4A+2.4A)
 - 1-4. OPERATING TEMPERATURE: -20°C~+50°C
 - LIFE TEST: 5,000 CYCLES.
 - RoHS COMPLIANT



Conn.1	Electrode	PORT 1	PORT 2	WIRE
1	+	1	5	RED
2	-	4	8	BLACK

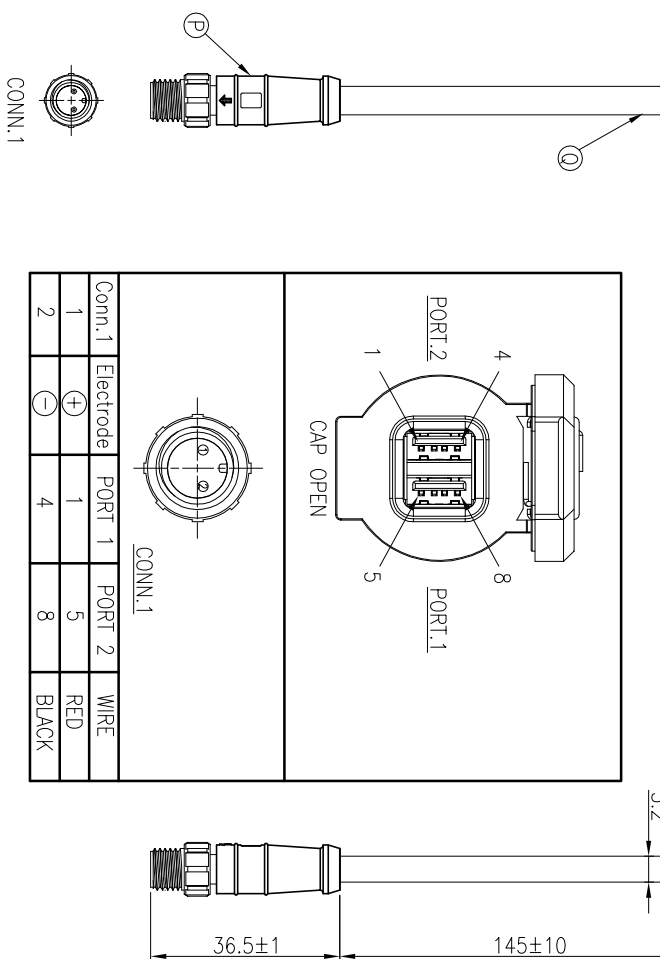

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.TT60120-3A		Yang	2017.02.26

R	ROUND TUBE	1	PC	BLACK
Q	CABLE	1	UL2464 18AWG*2C+T UV OD:5.2mm	BLACK
P	CONNECTOR	1	M8 Male 5A Plastic Nut	N/A
O	STOPPER	2	PVC	BLACK
N	MAGNET	2	NdFeB	NICKEL
M	GLUE	1	N/A	BLACK
L	USB2.0	1		BLACK
K	PCBA	1	FR-4	N/A
J	AXIS	1	SUS	N/A
I	SPRING	1	SUS	N/A
H	E-RING	1	SUS	N/A
G	CAP GASKET	1	SILICONE	RED
F	GASKET	1	SILICONE	RED
E	OVER MOLD	1	TPU	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	COVER	1	ABS	NATURAL
B	CAP	1	PC	BLACK
A	BODY	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE WATERPROOF USB CAR CHARGER 24V 4.8A + M8 M CONN (2 PIN)				
DMN	Yang	PART NO.2CH3002-W05501H		
CHKD	JF	SCALE 1:1	UNIT: mm	
APVD	Steve	SIZE: A3	SHEET:1 OF 1	REV:A

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信音企業股份有限公司