
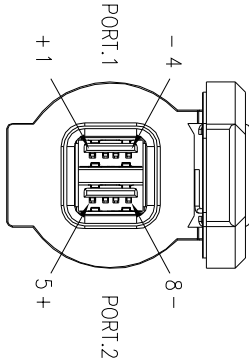



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - INPUT VOLTAGE: 10V~32V
 - OUTPUT VOLTAGE: 4.55V~5.25V
 - MAXIMUM OUTPUT CURRENT: 4.8A(2.4A+2.4A)
 - OPERATING TEMPERATURE: -20℃~+50℃
 - LIFE TEST: 5,000 CYCLES.
 - RoHS COMPLIANT
 - NORMALLY CLOSED SPRING CAP

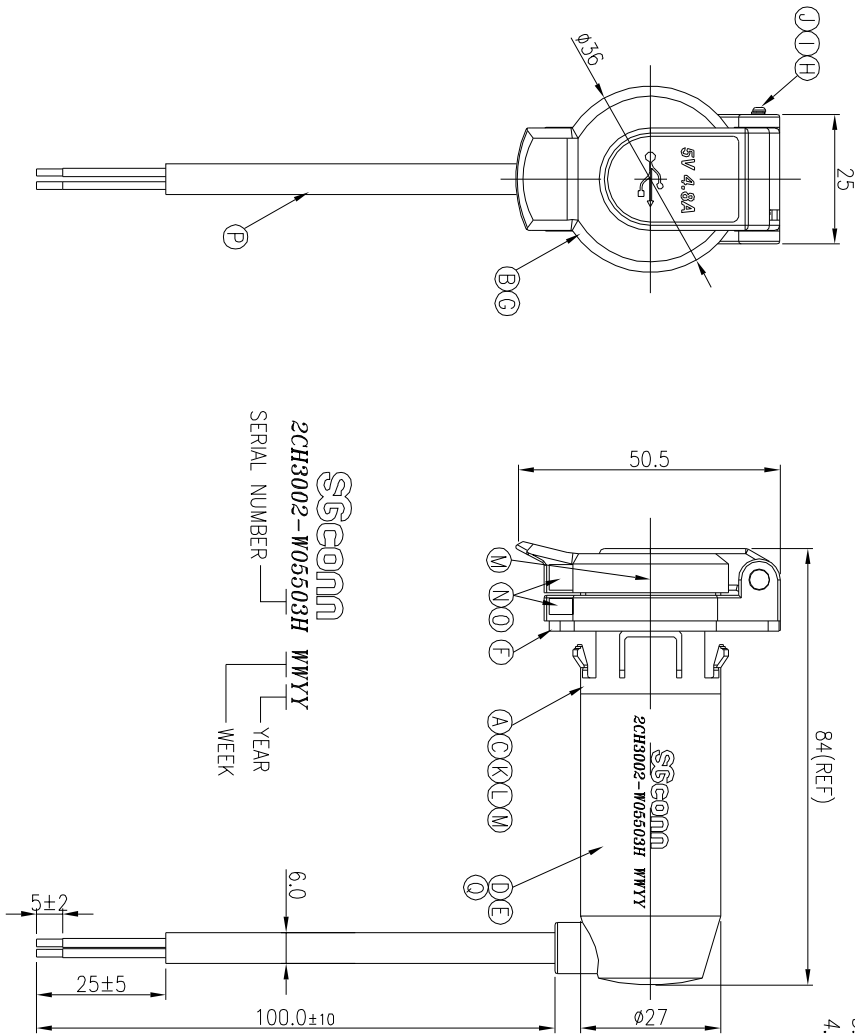

Q	ROUND TUBE	1	PC	BLACK
P	CABLE	1	2464 AWG 16AWG 2C UV OD:6.0mm BLACK	4CM3004-W02604
O	STOPPER	2	PVC	BLACK
N	MAGNET	2	NdFeB	NICKEL
M	GLUE	1	N/A	WHITE
L	USB2.0	1	N/A	N/A
K	PCBA	1	FR-4	N/A
J	AXIS	1	SUS	NATURAL
I	SPRING	1	SUS	NATURAL
H	E-RING	1	SUS	NATURAL
G	CAP GASKET	1	SILICONE	RED
F	GASKET	1	SILICONE	BLACK
E	OVER MOLD	1	TPU	BLACK
D	GLUE	1	N/A	BLACK
C	COVER	1	ABS	NATURAL
B	CAP	1	PC	BLACK
A	BODY	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singapore Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE WATERPROOF USB CAR CHARGER 12V-24V 4.8A NORMALLY CLOSED SPRING CAP		
X :±0.5	X :±2°	DWN Jun	PART NO.2CH3002-W05503H	
X.X :±0.3	X.X :±1°	CHKD JF	SCALE 1:1	UNIT: mm
X.XX :±0.2		APVD Steve	SIZE: A3	SHEET:1 OF 1 REV:A
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

WIRE	PORT 1	PORT 2
RED +	1	5
BLACK -	4	8